

ENCORE

Landscape Lighting



Quick Reference Catalog



www.EncoreLandscapeLighting.com

Encore Landscape Lighting
2277 Elliott Drive, Troy, MI 48083

Phone: 248-299-1919

Fax: 248-299-1911

EncoreLandscapeLighting@hotmail.com

© 2015 Encore Landscape Lighting

The Encore Landscape Lighting System™
combined with Encore's superior products will create beauty, safety, and security all in a simple-to-install system. The Encore Landscape Lighting System allows for easy installation of fixtures and transformers while delivering balanced voltage to each fixture, creating a consistent lighting portrait to every project.

The Encore Perfect Post Path System™
offers the flexibility of interchanging the shades on each path light without replacing the entire fixture allowing for cost effective seasonal design changes.

Table of Contents

Brass Products:

Path and Area Lighting 2-5
Up and Down Lighting6
Wall Washing and Flood Lights6
Inground and Hardscape Lights8-10
Well Lights and Inground Lights8-10
Step and Deck Lighting 11
Under Cap / Deck / Wall Lighting 11
Underwater Lighting 12
Wall Sconces..... 13

Copper Products:

Path, Area, and Up Lighting 14

Accessories..... 15

Aluminum Products:

Up Lighting..... 16
Path and Area Lighting16-17
Step and Deck Lighting 17

Support Equipment and Information:

Transformers and Accessories..... 18
Kelvin Chart..... 19
Lamp Guide.....20

Dare to Compare:

- Our exceptional quality and innovative product line uses the finest materials available, including solid brass, copper, stainless steel, and a superior grade of cast aluminum.
- Our innovative fixtures are user friendly and can be adjusted without the use of tools.
- Our lifetime warranty and unsurpassed service is second to none.
- Our state of the art factory and shipping department allow for orders to be processed and shipped the same day.

Encore Landscape Lighting Products are the choice by professionals who require reliable products of superior quality that will last a lifetime.

Path & Area Lighting



BL-01-B



BL-02



BL-05



BL-06



BL-08



BL-09-F



BL-11



BL-12



BL-14



BL-15



BL-02-B



BL-04



BL-07



BL-07-B



BL-09-H



BL-10



BL-12-Tree



BL-13



BL-15-Tree



BL-16

Path & Area Lighting



BL-17



BL-18



BL-19-VG



BL-60



BL-63



BL-64



BL-72-MR11



BL-72-MR16



BL-76



BL-18-VG



BL-19



BL-61



BL-62



BL-65



BL-71



BL-74



BL-75

Application:	Illuminating Pathways, Bed Areas and Driveways	
Construction:	Solid Brass Shade with Heavy Brass Post	
Finish:	Antiqued Brass	
Wire Lead:	25 Feet of 18-2 Wire	
Stake:	X-801 Heavy Duty Ground Stake	
Lamp:	LED: 3 Watt Warm White LED Bi-Pin Halogen: 20 Watt T4 (G6.35) Bi-Pin	
Lens:	Clear and Frosted Glass Dome	
Height:	21" & 24"	Light Spread: 6-16'
Warranty:	Lifetime	

Up & Down, Wall Washing & Flood Lights



BL-20



BL-23-LED



BL-24



BL-25



BL-26



BL-27



BL-29



BL-30



BL-31



BL-32

Application:	Up or Down Lighting of Trees and Homes
Construction:	BL-20/26/27/29: Solid Cast Brass BL-23/24/25: Solid Cast Brass with Telescoping 360° Rotatable Shroud
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Stake:	X-800 Heavy Duty Ground Stake
Lamp:	BL-20: LED: 3 or 6 Watt Warm White LED Halogen: 35 Watt MR16 BL-23: LED: 3 Watt Warm White LED BL-24: LED: 3 Watt Warm White LED BL-25: LED: 3, 6, or 9 Watt Warm White LED Halogen: 35 Watt MR16 BL-26/27: LED: 3 or 6 Watt Warm White LED Halogen: 35 Watt MR16 BL-29: LED: 3, 6, or 9 Watt Warm White LED Halogen: 35 Watt MR16
Optional Lens:	Frosted, Linear, Moonlight Blue
Warranty:	Lifetime

Application:	Up and Down Lighting of Walls, Signs and Homes
Construction:	Solid Cast Brass
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Stake:	X-801 Heavy Duty Ground Stake
Lamp:	BL-30: 20 Watt T3 (G4) Halogen BL-30-LED: 3 Watt Warm White LED Panel BL-31: 35 Watt T4 (G6.35) Halogen BL-31-LED: 6 Watt Warm White LED Panel BL-32: 35 Watt Halogen Par 36 BL-32-LED: 6, 10, 13 or 17 Watt LED
Lens:	Clear, Frosted, Linear
Warranty:	Lifetime

Inground Lights



WL-100



WL-101



WL-102



WL-103



WL-104



WL-112



WL-113



WL-115



WL-116



WL-90-LED



WL-92-LED



WL-93-LED

BRASS and STAINLESS

Application:	Up Lighting of Trees, Walls, Homes, Steps and Walkways
Construction:	Solid Cast Brass with Composite Sleeve
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Lamp:	LED: 3 or 6 Watt Warm White LED Halogen: 20 Watt Halogen MR16
Lens:	Clear Glass
Optional Lens:	Frosted Glass
Optional Cover:	X-100-Brass-Ring
Warranty:	Lifetime

Application:	Up Lighting of Trees, Walls, Columns, Pillars and Homes
Construction:	Solid Cast Brass with Composite Body
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Lamp:	WL-112/115/116: LED: 6, 10, 13 or 17 Watt LED Halogen: 35 Watt Par36 WL-113: LED: 3 or 6 Watt LED Halogen: 35 Watt MR16
Warranty:	Lifetime

Application:	Illuminating Walks, Outdoor Kitchens, Soffit Lighting, Wall Lighting, Up or Down Lighting
Construction:	Stainless Steel
Finish:	Stainless Steel
Wire Lead:	25 Feet of 18-2 Wire
Lamp:	LED: 1 Watt Warm White
Optional Lamp:	LED: 1 Watt - Red, Green, Blue
Lens:	Clear Flat Glass
Warranty:	5 Years

Inground Well Lights



WL-235-BK / WL-235-LB



WL-235-BK-LED / WL-235-LB-LED



WL-335-BK / WL-335-LB



WL-335-BK-LED / WL-335-LB-LED



WL-435-BK | WL-435-LB



WL-435-BK-LED / WL-435-LB-LED



WL-535-BK / WL-535-LB



WL-535-BK-LED / WL-535-LB-LED

Application:	Up Lighting
Construction:	ABS Composite with UV Protection
Finish:	Black or Brown
Wire Lead:	25 Feet of 16-2 Wire
Lamp:	WL-235/335/435: LED: 6, 10, 13 or 17 Watt Warm White LED Halogen: 35 Watt Par 36 WL-535: LED: 3 or 6 Watt Warm White LED Halogen: 20 Watt MR16
Lens:	Clear Glass or Frosted Glass
Warranty:	Lifetime

Step, Deck & Wall Lights



SD-46



SD-47



SD-01-BR



SD-403



SD-404



SD-405



SD-500



SD-501



SD-505

Application:	Illuminating Decks, Steps, Posts, Walls and Docks
Construction:	Solid Brass
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 18-2 Wire
Lamp:	LED: 3 Watt LED Halogen: 20 Watt T3 (G4) Bi-Pin
Lens:	Frosted or Clear Glass
Warranty:	Lifetime

Underwater Lighting



UL-54-LED-3W



UL-54-LED-6W



UL-54-LED-3W-RGB



UL-54-LED-6W-RGB



UL-55



UL-56



UL-58



UL-59

Application:	Underwater Lighting
Construction:	Brass
Finish:	Nautral Brass
Wire Lead:	25 Feet of 16-2 Wire
Lamp:	LED: 3 or 6 Watt Warm White LED Halogen: 35 Watt MR16
Lens:	UL-55/56/57/58: Clear Glass UL-59: Frosted Glass
Warranty:	3 Years



WS-01



WS-02



WS-03



WS-04



WS-100

Application:	Illuminating Front Entrance Ways, Porches, Decks, Walls and Garages		
Construction:	Solid Brass		
Finish:	Antiqued Brass		
Lamp:	WS-01:	(2) 20 Watt Halogen T4 (G6.35) Bi-Pin	
	WS-01-LED:	(2) 3 Watt Bi-Pin LED	
	WS-02:	(2) 20 Watt Halogen T4 (G6.35) Bi-Pin	
	WS-02-LED:	(2) 3 Watt Bi-Pin LED	
	WS-03:	(2) Medium Base A-19 (12V or 120V)	
	WS-03-LED:	(2) 6 Watt A-19 LED (12V or 120V)	
	WS-04:	(2) 20 Watt Halogen MR-16	
	WS-04-LED:	(2) 3 Watt MR16 LED	
Warranty:	WS-100:	20 Watt Halogen MR16	
	WS-100-LED:	3 Watt MR16 LED	



CL-02



CL-02-B



CL-05



CL-07



CL-07-B



CL-22

Application:	Illuminating Pathways, Bed Areas and Driveways
Construction:	Copper Shade with Solid Copper Post
Finish:	Copper
Wire Lead:	25 Feet of 18-2 Wire
Stake:	X-801 Heavy Duty Ground Stake
Lamp:	Path Lights: LED: 3 Watt Warm White LED Bi-Pin Halogen: 20 Watt T4 (G6.35) Bi-Pin
	CL-22: LED: 3 or 6 Watt Warm White LED Halogen: 35 Watt MR16
Height:	CL-02/02-B: 24" CL-05/07/07-B: 21"
Light Spread:	CL-02/02-B: 10-12' CL-05/07/07-B: 8-10'
Lens:	Clear and Frosted Glass Dome CL-22: Clear Convex Glass
Warranty:	Lifetime

ACCESSORIES



**Voltage
Balancer**

X-900

Wall Mount



X-813

Tree Mount



X-815

Gutter Mount



X-818



X-100-BRASS
RING



X-300-BRASS
COVER-BK



X-300-BRASS
COVER-LB



X-820



X-821

Riser Extensions



X-807-18



X-807-15



X-807-10



X-807-7

Adjustable Riser Extensions



X-807-ADJ-12-22



X-807-ADJ-6-10

Path Lighting, Up & Down Lighting



AL-02



AL-02-B



AL-07-B



AL-09-F



AL-11



AL-13



AL-26



AL-31

Application:	Up or Down Lighting
Construction:	AL-26 & 31: Die Cast Aluminum
Finish:	Textured Black
Wire Lead:	25 Feet of 18-2 Wire
Stake:	X-800 Ground Stake
Lamp:	AL-26: LED: 3 or 6 Watt Warm White LED Bi-Pin Halogen: 20 Watt MR16 AL-31: LED: 3 or 6 Watt Warm White LED Panel Halogen: 20 Watt T3 (G4) Bi-Pin
Lens:	Clear Glass
Warranty:	3 Years

ALUMINUM



AL-05



AL-07



AL-09-H



AL-10



AL-14



AL-46



AL-47

Application:	Illuminating Pathways, Bed Areas and Driveways	
Construction:	Path Lights: Die Cast Aluminum Shade and Post	
Finish:	Textured Black	
Wire Lead:	25 Feet of 18-2 Wire	
Stake:	X-801 Ground Stake	
Lamp:	LED: 3 or 6 Watt Warm White LED Bi-Pin Halogen: 20 Watt MR16	
Lens:	Clear and Frosted Glass Dome	
Height:	24"	Light Spread: 6-12'
Warranty:	3 Years	

Transformers



Multi-Tap Transformers

- Construction:** 304 Stainless Steel
- Taps:** 12-15 Volt Transformers are 12, 13, 14 & 15
12-22 Volt Transformers are 12, 13, 14, 15, 16, 17, 18, 20 & 22
- Primary Protection:** Automatic thermal reset breaker
- Secondary Protection:** 25 amp, 300 watt magnetic breaker with reset switch
- Torodial Core:** Epoxy sealed core which is silent and up to 10% more efficient, runs much cooler than laminated cores.
- Terminal:** Extra large 125 amp terminal blocks, holds (8) 12/2 wire.
- Internal Wiring:** Non-corrosive, tin coated marine grade, dedicated current loop to measure primary amperage.
- Timer Receptacle:** Standard receptacle for plug and play options
- Photo Cell Plug:** Dedicated plug for easy installation of photo cell
- Child Proof Safety:** Lockable attached door to prevent access

Model	Volts	Wattage	Max Amps	Dimensions (L x W x D)	Weight
TR-75SS-15	12, 13, 14, 15	75 watts	.625A	6.5" x 3.75" x 4.5"	8lbs
TR-150SS-15	12, 13, 14, 15	150 watts	1.25A	10.5" x 5.75" x 4.5"	13lbs
TR-300SS-15	12, 13, 14, 15	300 watts	2.5A	16.25" x 6" x 5.5"	24lbs
TR-600SS-15	12, 13, 14, 15	600 watts	5.0A	16.25" x 6" x 5.5"	30lbs
TR-300SS-22	12, 13, 14, 15, 16, 17, 18, 22	300 watts	2.5A	16.25" x 6" x 5.5"	26lbs
TR-600SS-22	12, 13, 14, 15, 16, 17, 18, 22	600 watts	5.0A	16.25" x 6" x 5.5"	32lbs
TR-900SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	900 watts	7.5A	17.25" x 7.75" x 7"	48lbs
TR-1200SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	1200 watts	10A	17.25 x 7.75" x 7"	51lbs

Kelvin Chart



X-TM



X-TM-DM

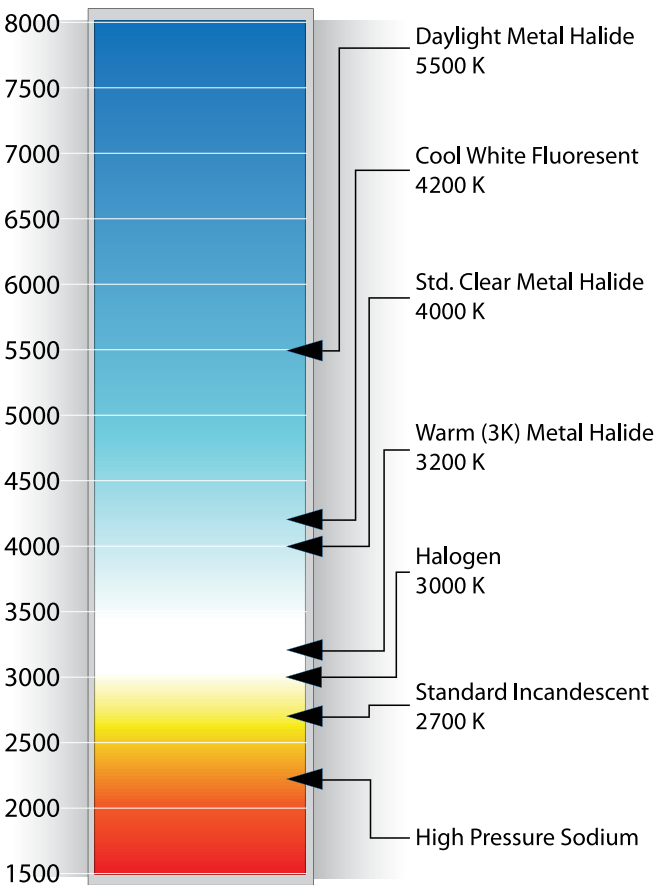


X-PC






XP-PC-25



Kelvin Chart



Lamp Guide

Lamp Type	Part Number	Watts	Volts
LED T3 	LA-LED-T3-25-1W-3000	1	12
	LA-LED-T3-13-2W-3000	2	12
	LA-LED-T3-18-3W-3000	3	12
	LA-LED-T3-27-4W-3000	4	12
LED MR8 	LA-LED-MR8-3W-2700	3	12
LED MR11 	LA-LED-MR11-3W-3000	3	12
LED MR16 	LA-LED-MR16-3W-2800-30	3	12
	LA-LED-MR16-3W-2800-45	3	12
	LA-LED-MR16-3W-2800-60	3	12
	LA-LED-MR16-3W-3000-30	3	12
	LA-LED-MR16-3W-3000-45	3	12
	LA-LED-MR16-3W-3000-60	3	12
	LA-LED-MR16-3W-5500-45	3	12
	LA-LED-MR16-6W-2800-30	6	12
	LA-LED-MR16-6W-2800-45	6	12
	LA-LED-MR16-6W-2800-60	6	12
	LA-LED-MR16-6W-3000-30	6	12
	LA-LED-MR16-6W-3000-45	6	12
	LA-LED-MR16-6W-3000-60	6	12
	LA-LED-MR16-6W-5500-45	6	12
	LA-LED-MR16-6W-5500-60	6	12
	LA-LED-MR16-9W-2800-40	9	12
	LA-LED-MR16-9W-2800-60	9	12
	LA-LED-MR16-9W-3000-40	9	12
	LA-LED-MR16-9W-3000-60	9	12
LED PAR 36 	LA-LED-PAR36-6W-2700-40	6	12
	LA-LED-PAR36-6W-3000-40	6	12
	LA-LED-PAR36-10W-2700-40	10	12
	LA-LED-PAR36-10W-3000-40	10	12
	LA-LED-PAR36-13W-2700-40	13	12
	LA-LED-PAR36-13W-3000-40	13	12
	LA-LED-PAR36-17W-2700-40	17	12
	LA-LED-PAR36-17W-3000-40	17	12

Lamp Guide				
Beam Spread	Base	Lumens/CBCP	Color Temp	Rated Life (Hours)
-	G4 Bi-Pin	90	3000	40,000
-	G4 Bi-Pin	180	3000	40,000
-	G4 Bi-Pin	240	3000	40,000
-	G4 Bi-Pin	360	3000	40,000
80º	G4 Bi-Pin	120	2700	40,000
40º	G4 Bi-Pin	180	3000	40,000
30º	GU5.3 Bi-Pin	240	2800	40,000
45º	GU5.3 Bi-Pin	240	2800	40,000
60º	GU5.3 Bi-Pin	240	2800	40,000
30º	GU5.3 Bi-Pin	260	3000	40,000
45º	GU5.3 Bi-Pin	260	3000	40,000
60º	GU5.3 Bi-Pin	260	3000	40,000
45º	GU5.3 Bi-Pin	320	5500	40,000
30º	GU5.3 Bi-Pin	450	2800	40,000
45º	GU5.3 Bi-Pin	450	2800	40,000
60º	GU5.3 Bi-Pin	450	2800	40,000
30º	GU5.3 Bi-Pin	470	3000	40,000
45º	GU5.3 Bi-Pin	470	3000	40,000
60º	GU5.3 Bi-Pin	470	3000	40,000
45º	GU5.3 Bi-Pin	510	5500	40,000
60º	GU5.3 Bi-Pin	510	5500	40,000
40º	GU5.3 Bi-Pin	560	2800	40,000
60º	GU5.3 Bi-Pin	560	2800	40,000
40º	GU5.3 Bi-Pin	580	3000	40,000
60º	GU5.3 Bi-Pin	580	3000	40,000
40º	Screw Terminal	460	2700	40,000
40º	Screw Terminal	480	3000	40,000
40º	Screw Terminal	600	2700	40,000
40º	Screw Terminal	620	3000	40,000
40º	Screw Terminal	800	2700	40,000
40º	Screw Terminal	820	3000	40,000
40º	Screw Terminal	930	2700	40,000
40º	Screw Terminal	960	3000	40,000



2277 Elliott Drive • Troy, MI 48083
P: 248-299-1919 • F: 248-299-1911
EncoreLandscapeLighting@hotmail.com

www.EncoreLandscapeLighting.com