

The Encore Landscape Lighting System™ combined with Encore's superior products will create beauty, safety, and security all in a simple-to-install system. The Encore Landscape Lighting System allows for easy installation of fixtures and transformers while delivering balanced voltage to each fixture, creating a consistent lighting portrait to every project.

The Encore Perfect Post Path System™ offers the flexibility of interchanging the shades on each path light without replacing the entire fixture allowing for cost effective seasonal design changes.

Table of Contents

Brass Products:

Path and Area Lighting	2
Hanging Lights	15
Up and Down Lighting	16
Wall Washing and Flood Lights	18
Accessories	20
Step and Deck Lighting	22
Under Cap / Deck / Wall Lighting	24
Wall Sconces	25
Inground and Hardscape Lights	26
Well Lights and Inground Lights	27
Underwater Lighting	30

Copper Products:

Path, Area, and Up Lighting	34
-----------------------------------	----

Aluminum Products:

Path and Area Lighting	36
Up Lighting	40
Step and Deck Lighting	41

Support Equipment and Information:

Transformers and Accessories	42
Kelvin Chart	43
Lamp Guide	44
Powder Coat Finishes	46
Wiring Diagrams	47
Warranty	48

Dare to Compare

- Our exceptional quality and innovative product line uses the finest materials available, including solid brass, copper, stainless steel, and a superior grade of cast aluminum.
- Our innovative fixtures are user friendly and can be adjusted without the use of tools.
- Our lifetime warranty and unsurpassed service is second to none.
- Our state of the art factory and shipping department allow for orders to be processed and shipped the same day.

Encore Landscape Lighting Products are the choice by professionals who require reliable products of superior quality that will last a lifetime.



www.EncoreLandscapeLighting.com

Encore Landscape Lighting




2277 Elliott Drive

Troy, MI 48083

Phone: 248-299-1919 • Fax: 248-299-1911

EncoreLandscapeLighting@hotmail.com


© 2015 Encore Landscape Lighting

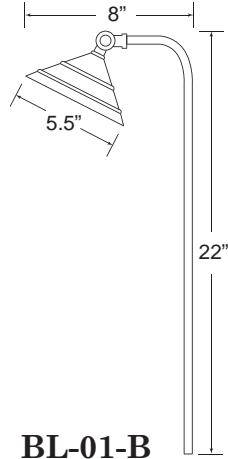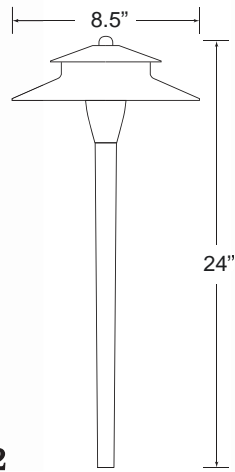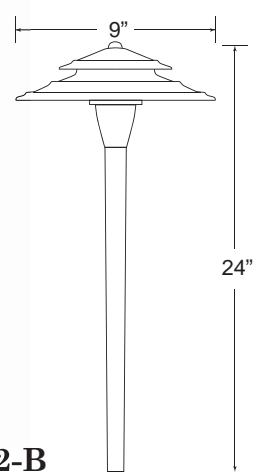**BL-01-B****BL-02****BL-02-B**


Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	BL-01-B:	Spun Brass Articulating Shade with Angled Tubular Brass Post	
	BL-02 / BL-02-B:	Solid Cast Brass Shade with Heavy Brass Post	
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 18-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	LED:	3 Watt Warm White LED Bi-Pin	
	Halogen:	20 Watt T4 (G6.35) Bi-Pin	
Lens:	Clear and Frosted Glass Dome		
Height:	BL-01-B:	22"	Light Spread: 6-12'
	BL-02 / BL-02-B:	24"	Light Spread: 10-12'
Warranty:	Lifetime		




BL-04

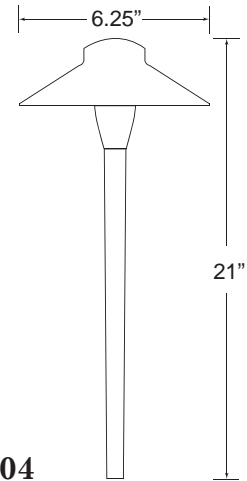

BL-05

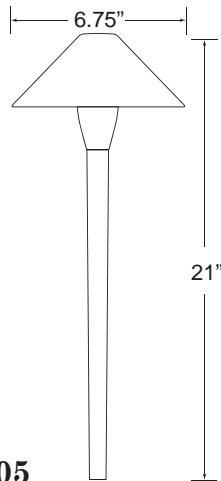





BL-06

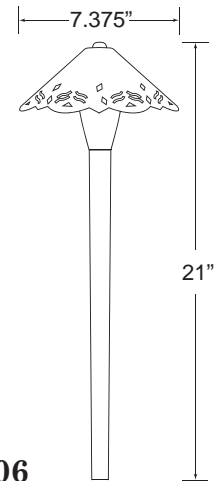

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Solid Brass Shade with Heavy Brass Post		
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 18-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	LED:	3 Watt Warm White LED Bi-Pin	
	Halogen:	20 Watt T4 (G6.35) Bi-Pin	
Lens:	Clear and Frosted Glass Dome		
Height:	21"	Light Spread:	8-10'
Warranty:	Lifetime		

BRASS

Path & Area Lighting

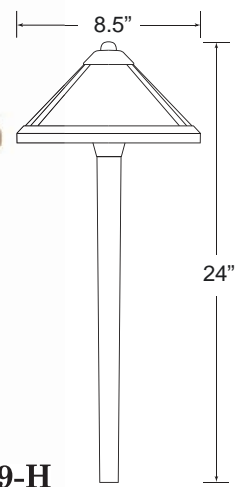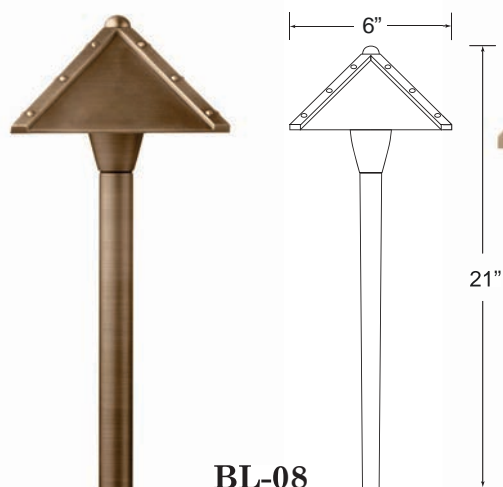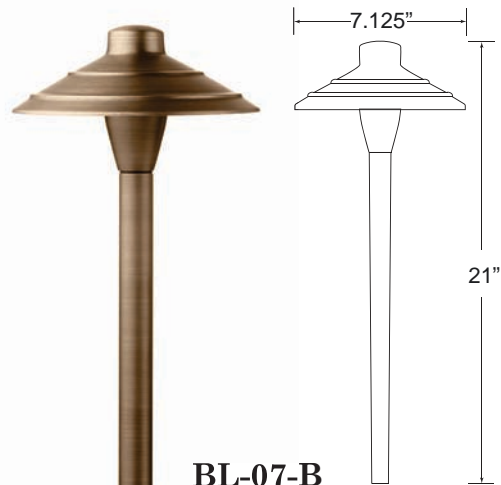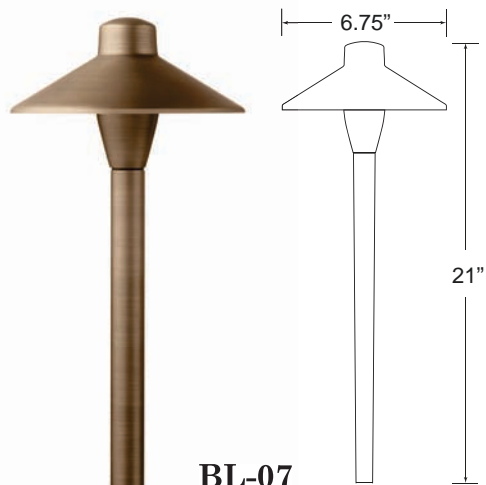


Application: Illuminating Pathways, Bed Areas and Driveways
Construction: **BL-07 / BL-07-B / BL-08:** Solid Cast Brass Shade with Heavy Brass Post
BL-09-F / BL-09-H: Glass Shade with Brass Frame and Heavy Brass Post

Finish: Antiqued Brass
Wire Lead: 25 Feet of 18-2 Wire
Stake: X-801 Heavy Duty Ground Stake
Lamp: LED: 3 Watt Warm White LED Bi-Pin
 Halogen: 20 Watt T4 (G6.35) Bi-Pin


Lens: Clear and Frosted Glass Dome

Height:	BL-07 / BL-07-B: 21"	Light Spread: 8-10'
	BL-08: 21"	Light Spread: 7-9'
	BL-09-F / BL-09-H: 24"	Light Spread: 9-11'


Warranty: Lifetime

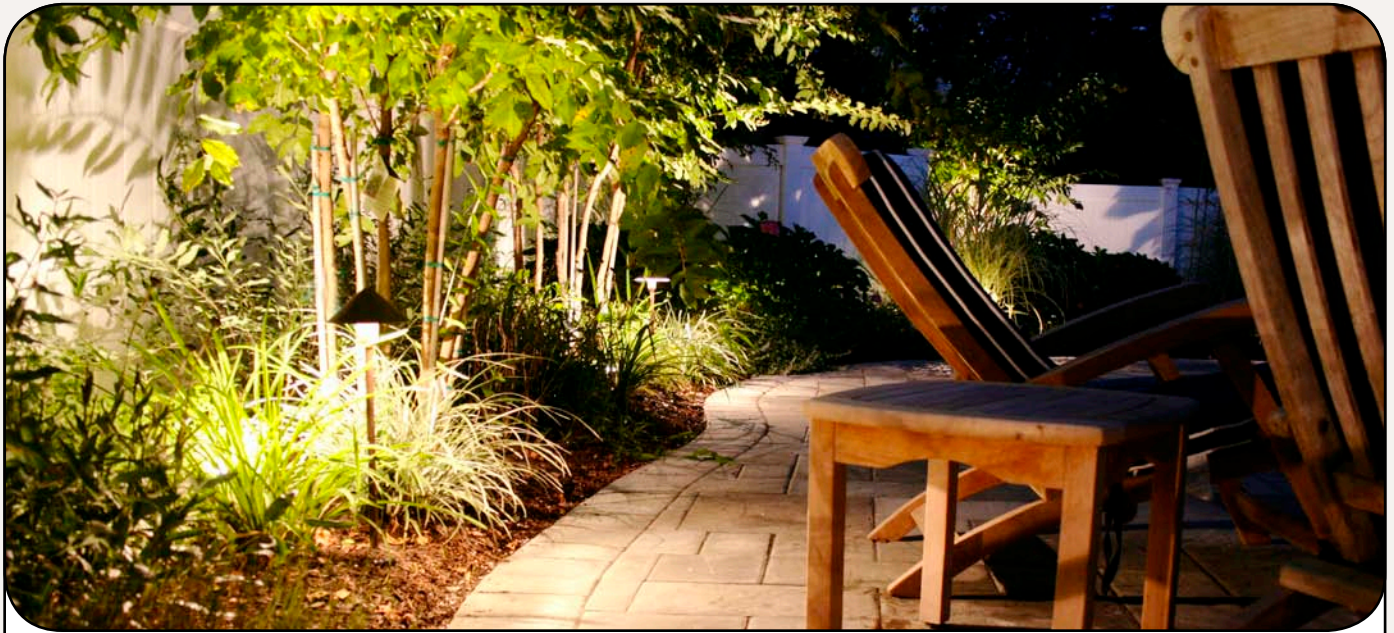

BRASS

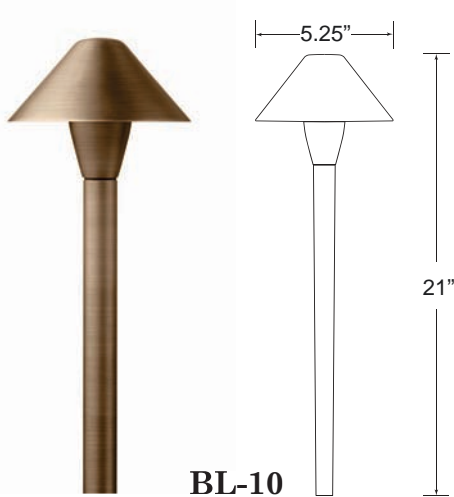



BL-10

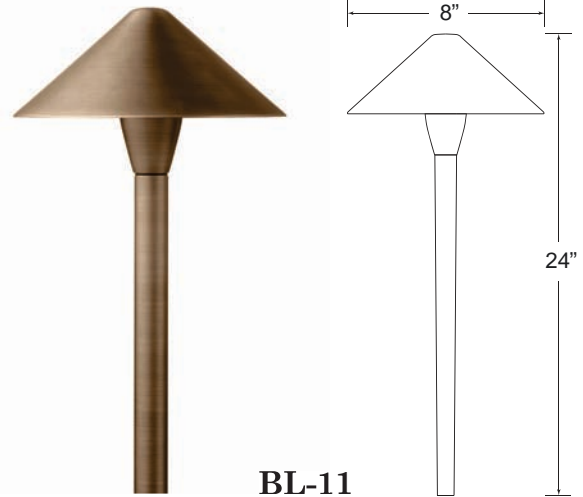



BL-11

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Solid Cast Brass Shade with Heavy Brass Post		
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 18-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	LED: 3 Watt Warm White LED Bi-Pin		
	Halogen: 20 Watt T4 (G6.35) Bi-Pin		
	Clear and Frosted Glass Dome		
Lens:			
Height:	BL-10:	21"	Light Spread: 6-8'
	BL-11:	24"	Light Spread: 8-10'
Warranty:	Lifetime		


Path & Area Lighting

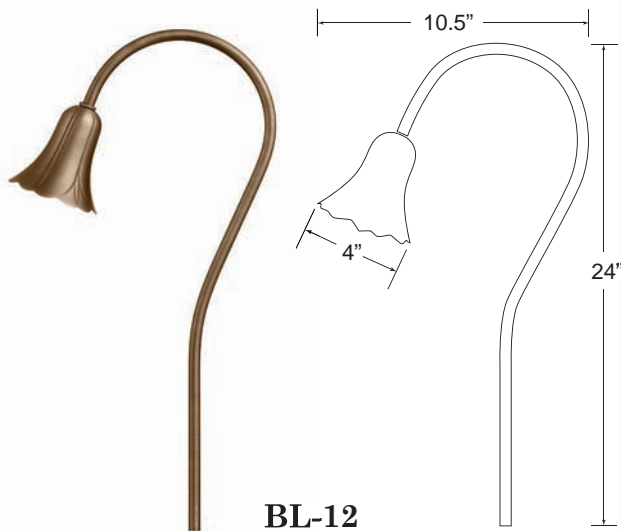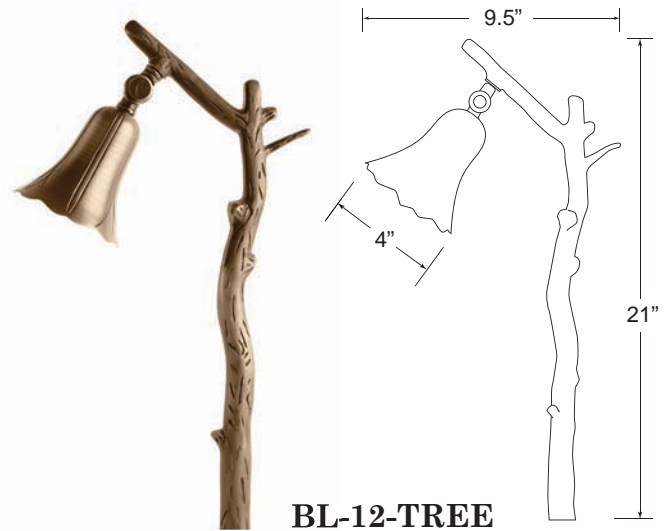**BL-12****BL-12-TREE**

Application:	Illuminating Pathways, Bed Areas and Driveways			
Construction:	BL-12:	Solid Cast Brass Shade with Shepherd Hook Post		
	BL-12-Tree:	Solid Cast Brass Shade with Heavy Cast Brass Tree Branch Post		
Finish:	Antiqued Brass			
Wire Lead:	25 Feet of 18-2 Wire			
Stake:	X-801 Heavy Duty Ground Stake			
Lamp:	LED:	3 Watt Warm White LED Bi-Pin		
	Halogen:	20 Watt T4 (G6.35) Bi-Pin		
Lens:	Clear			
Height:	BL-12:	24"	Light Spread:	4-6'
	BL-12-Tree:	21"	Light Spread:	4-10'
Warranty:	Lifetime			

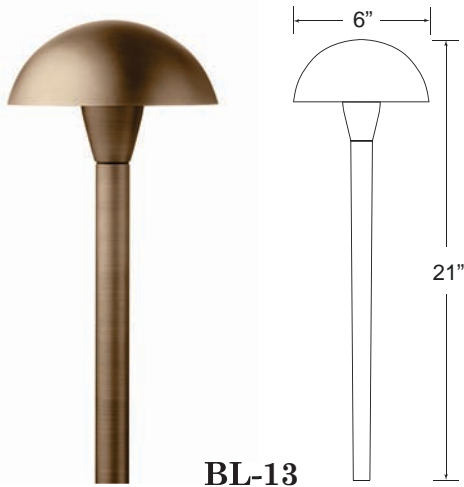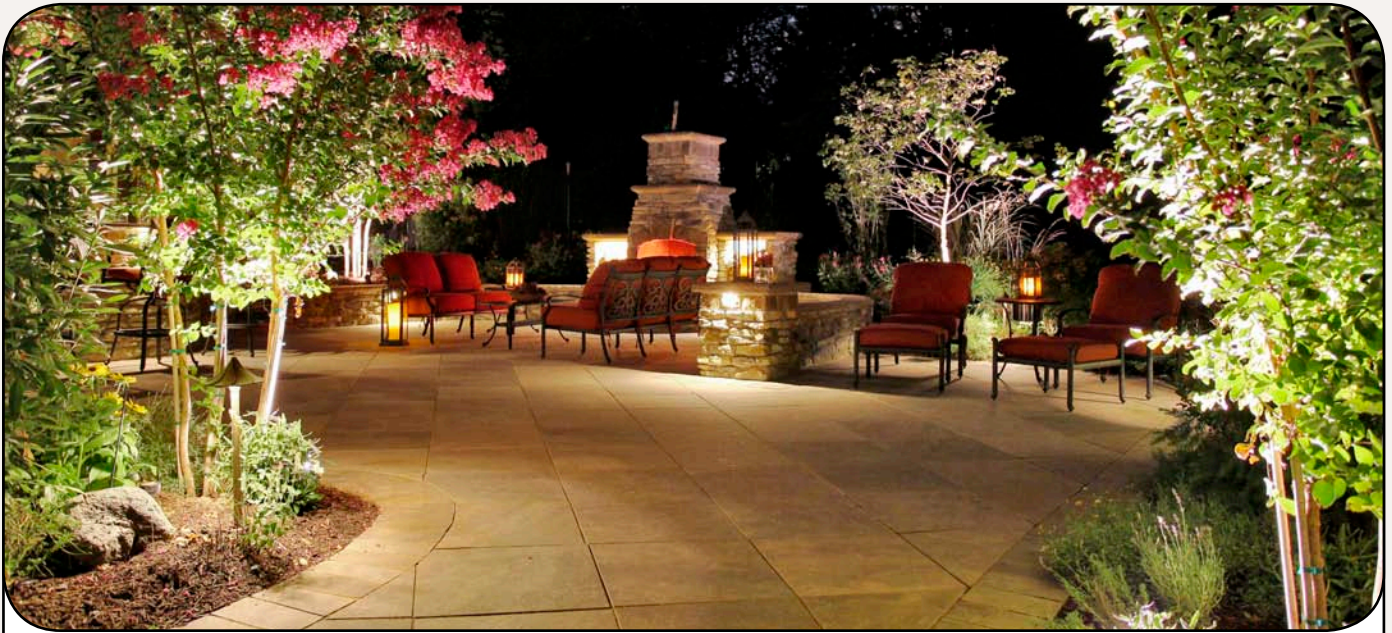


BL-13

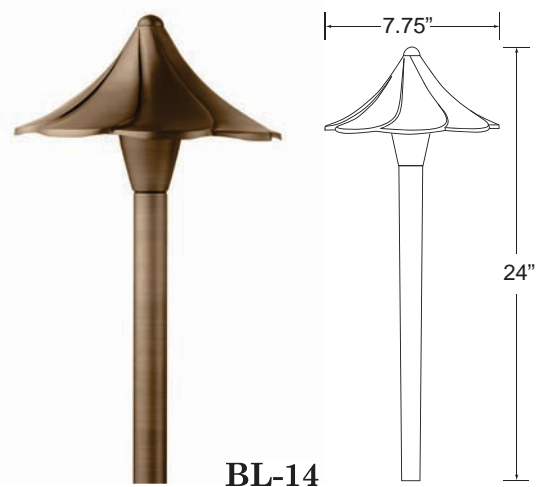


BL-14

Application:	Illuminating Pathways, Bed Areas and Driveways			
Construction:	Solid Cast Brass Shade with Heavy Brass Post			
Finish:	Antiqued Brass			
Wire Lead:	25 Feet of 18-2 Wire			
Stake:	X-801 Heavy Duty Ground Stake			
Lamp:	LED:	3 Watt Warm White LED Bi-Pin		
	Halogen:	20 Watt T4 (G6.35) Bi-Pin		
Lens:	Clear and Frosted Glass Dome			
Height:	BL-13:	21"	Light Spread:	7-9'
	BL-14:	24"	Light Spread:	8-10'
Warranty:	Lifetime			

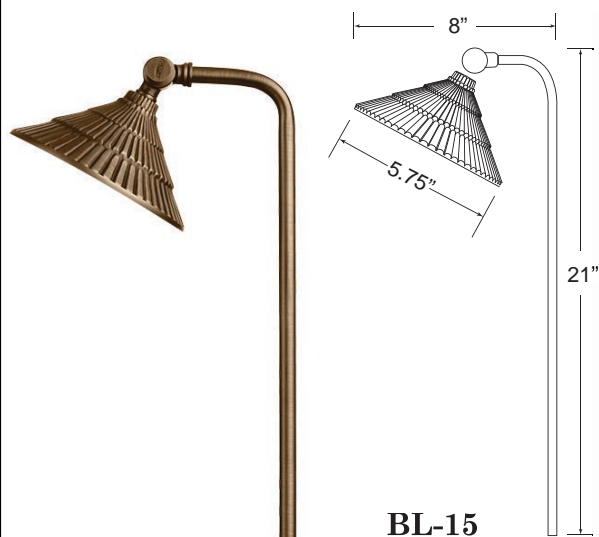

BL-15

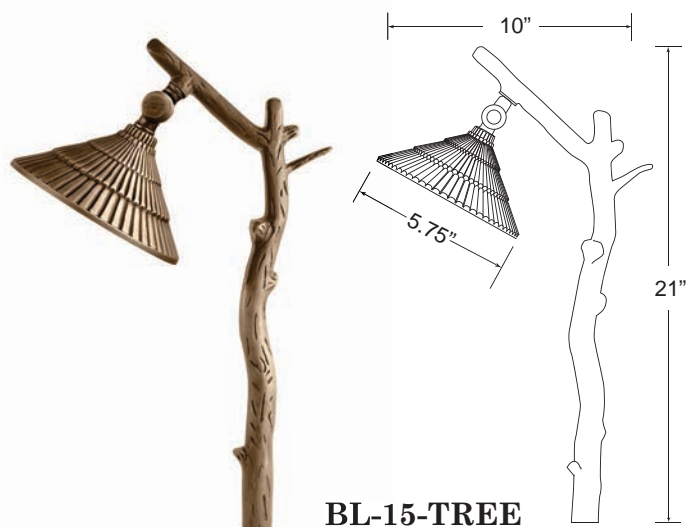

BL-15-TREE

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	BL-15:	Solid Cast Brass Articulating Shade with Tubular Elbowed Post	
	BL-15-Tree:	Solid Cast Brass Shade with Cast Brass Tree Branch Post	
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 18-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	LED:	3 Watt Warm White LED Bi-Pin	
	Halogen:	20 Watt T4 (G6.35) Bi-Pin	
Lens:	Clear and Frosted Glass Dome		
Height:	21"	Light Spread:	6-12'
Warranty:	Lifetime		



BRASS



BL-16



BL-17

Application:	Illuminating Pathways, Bed Areas and Driveways			
Construction:	Solid Cast Brass Shade with Heavy Brass Post			
Finish:	Antiqued Brass			
Wire Lead:	25 Feet of 18-2 Wire			
Stake:	X-801 Heavy Duty Ground Stake			
Lamp:	LED:	3 Watt Warm White LED Bi-Pin		
	Halogen:	20 Watt T4 (G6.35) Bi-Pin		
Lens:	Clear and Frosted Glass Dome			
Height:	BL-16:	24"	Light Spread:	8-10'
	BL-17:	21"	Light Spread:	8-10'
Warranty:	Lifetime			


Path & Area Lighting



BL-18




BL-18-VG

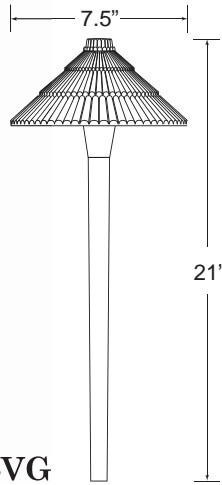





BL-19




BL-19-VG

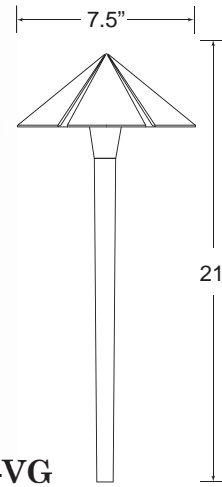

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Solid Cast Brass Shade with Heavy Brass Post		
Finish:	Antiqued Brass / Aged Verde		
Wire Lead:	25 Feet of 18-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	LED:	3 Watt Warm White LED Bi-Pin	
	Halogen:	20 Watt T4 (G6.35) Bi-Pin	
Lens:	Clear and Frosted Glass Dome		
Height:	21"	Light Spread:	8-10'
Warranty:	Lifetime		

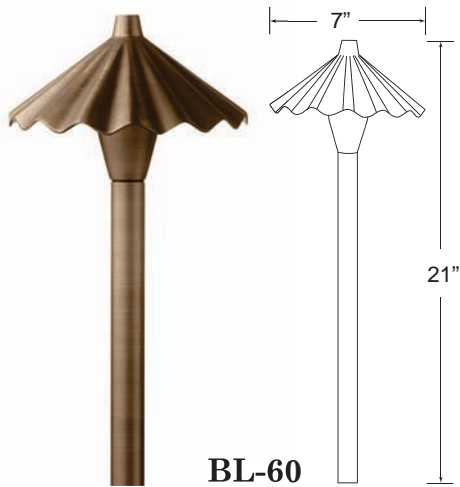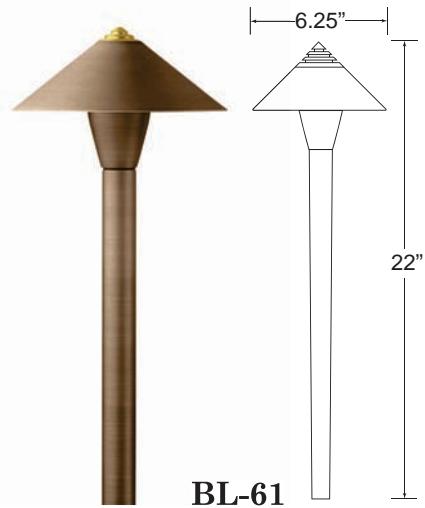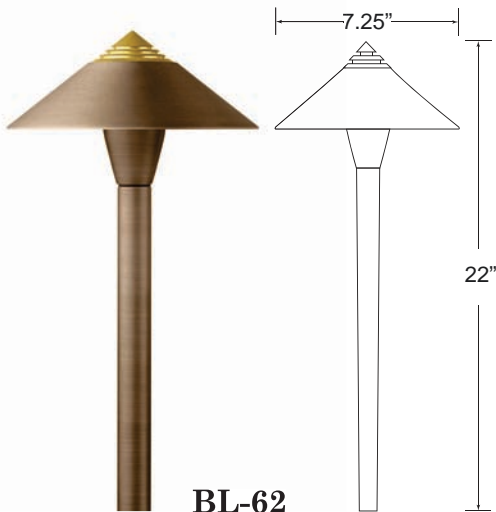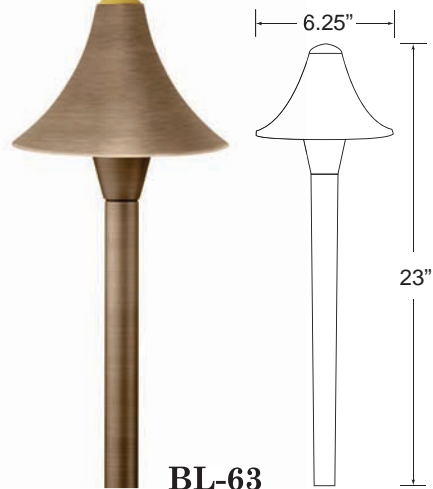**BL-60****BL-61****BL-62****BL-63**


Application:	Illuminating Pathways, Bed Areas and Driveways			
Construction:	Solid Brass Shade with Heavy Brass Post			
Finish:	Antiqued Brass			
Wire Lead:	25 Feet of 18-2 Wire			
Stake:	X-801 Heavy Duty Ground Stake			
Lamp:	LED:	3 Watt Warm White LED Bi-Pin		
	Halogen:	20 Watt T4 (G6.35) Bi-Pin		
Lens:	Clear and Frosted Glass Dome			
Height:	BL-60:	21"	Light Spread:	8-10'
	BL-61/BL-62:	22"	Light Spread:	8-10'
	BL-63:	23"	Light Spread:	6-8'
Warranty:	Lifetime			

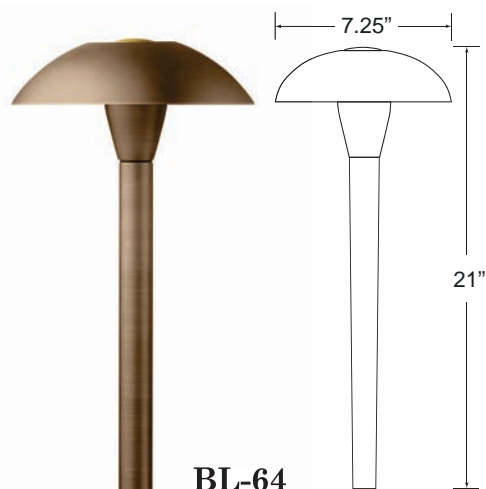


BL-64






BL-65

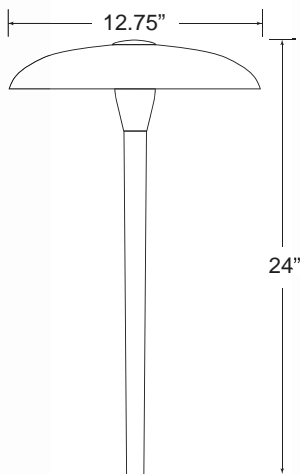



BL-71

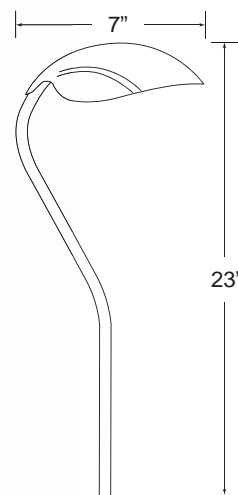

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Solid Cast Brass Shade with Heavy Brass Post		
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 18-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	BL-64/BL-65:	LED:	3 Watt Warm White LED Bi-Pin
		Halogen:	20 Watt T4 (G6.35) Bi-Pin
	BL-71:	LED:	3 Watt Warm White BA-15s
		Halogen:	20 Watt BA-15s
Lens:	Clear and Frosted Glass Dome (No Lens with BL-71)		
Height:	BL-64:	21"	Light Spread: 8-10'
	BL-65:	24"	Light Spread: 12-16'
	BL-71:	23"	Light Spread: 6-8'
Warranty:	Lifetime		

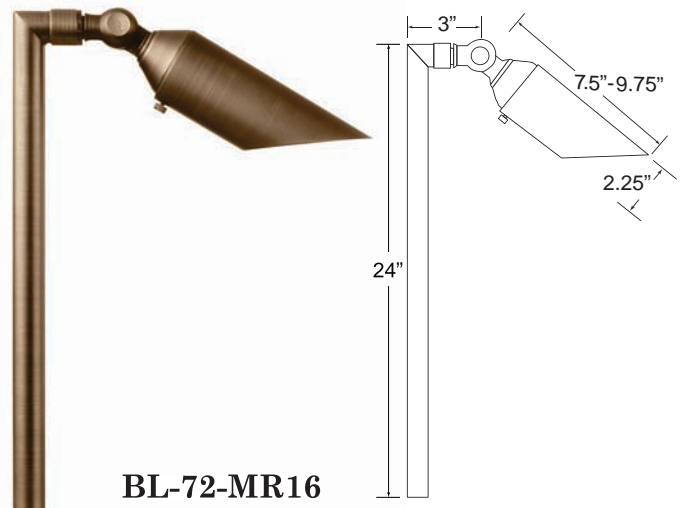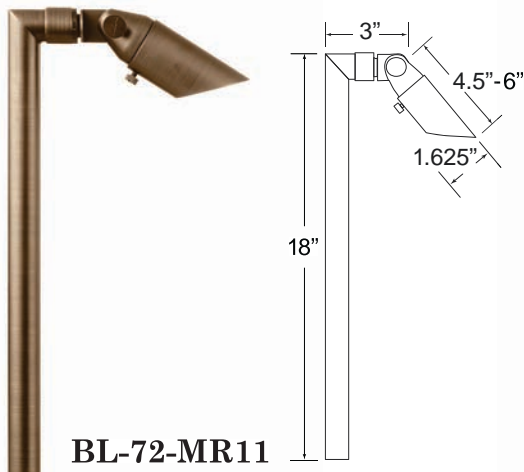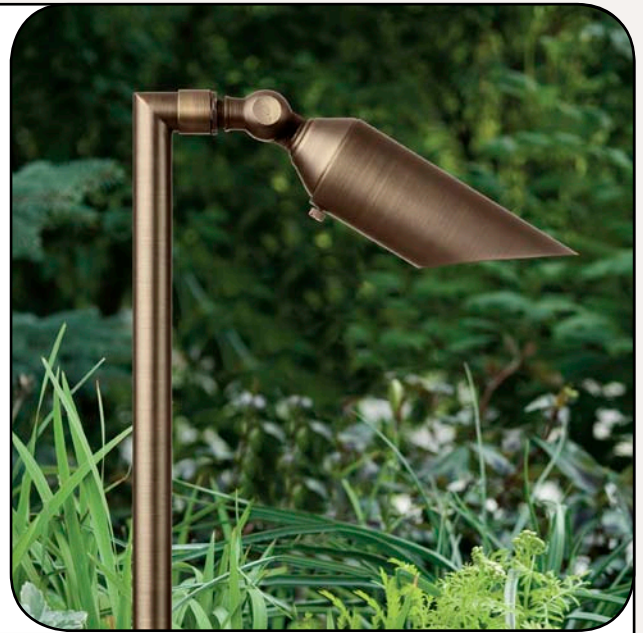

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Solid Brass Bullet Light with Heavy Brass Elbowed Post		
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 16-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	BL-72-MR11:	LED:	3 Watt LED
		Halogen:	20 Watt MR11
	BL-72-MR16:	LED:	3 or 6 Watt LED
		Halogen:	35 Watt MR16
Lens:	Clear Flat Glass		
Height:	BL-72-MR11:	18"	
	BL-72-MR16:	24"	
Warranty:	Lifetime		

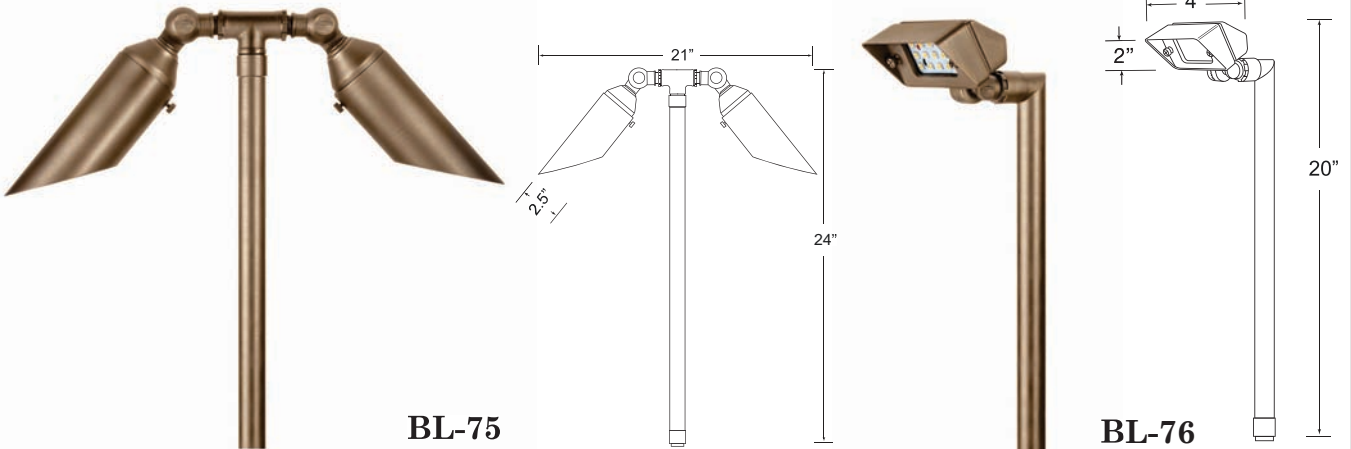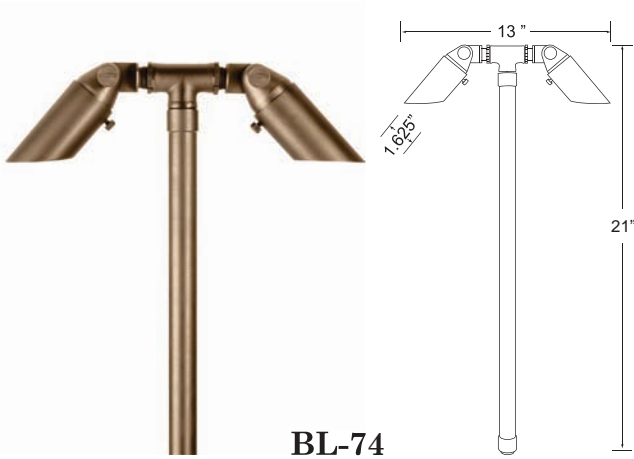

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Solid Brass with Heavy Brass Post		
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 16-2 Wire		
Stake:	X-801 Heavy Duty Ground Stake		
Lamp:	BL-74:	LED:	(2) 3 Watt LED
		Halogen:	(2) 20 Watt MR11
	BL-75:	LED:	(2) 3, 6 or 9 Watt LED
		Halogen:	(2) 35 Watt MR16
	BL-76:	LED:	3 Watt LED Panel
		Halogen:	20 Watt T3 (G4) Bi Pin
Lens:	Clear Flat Glass		
Height:	BL-74:	21"	
	BL-75:	24"	
	BL-76:	20"	
Warranty:	Lifetime		



HL-02-SP



HL-02-B-SP



HL-09-F-SP



HL-09-H-SP



HL-09-F



HL-09-H



HL-05



HL-06



HL-11



HL-12





HL-14







HL-60

Application:	Illuminating Decks, Porches, Outdoor Kitchens, Sun Rooms, Patios and Hanging Plants
Construction:	Heavy Duty Spun Brass and Cast Brass
Finish:	Antiqued Brass
Lamp:	LED: 2, 3 or 4 Watt Warm White LED Bi-Pin Halogen: 20 Watt T4 (G6.35) Bi-Pin
Lens:	Frosted Glass Dome
Warranty:	Lifetime

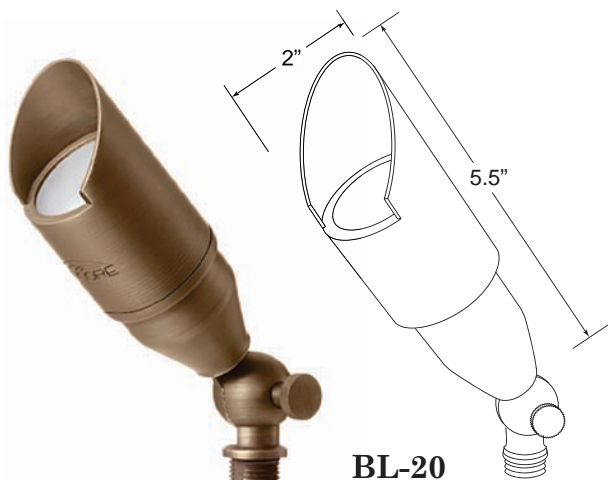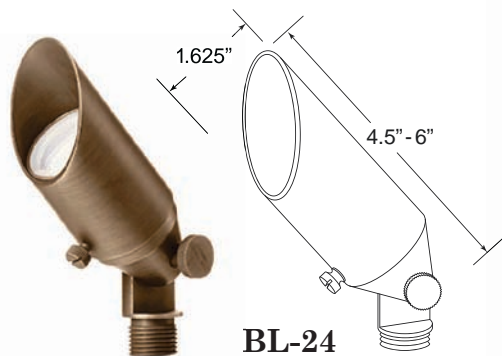**BL-20****BL-23-LED****BL-24****BL-25**

Application:	Up or Down Lighting of Trees and Homes		
Construction:	BL-20:	Solid Cast Brass	
	BL-23 / BL-24 / BL-25:	Solid Cast Brass with Telescoping 360° Rotatable Shroud	
Finish:	Antiqued Brass		
Wire Lead:	BL-20 / BL-25:	25 Feet of 16-2 Wire	
	BL-23 / BL-24:	25 Feet of 18-2 Wire	
Stake:	X-800 Heavy Duty Ground Stake		
Lamp:	BL-20:	3 or 6 Watt Warm White LED or 35 Watt Halogen MR16	
	BL-23:	3 Watt Warm White LED	
	BL-24:	3 Watt Warm White LED or 20 Watt Halogen MR11	
	BL-25:	3, 6 or 9 Watt Warm White LED or 35 Watt Halogen MR16	
Lens:	Clear Flat Glass		
Optional Lens:	Frosted, Linear, Moonlight Blue		
Warranty:	Lifetime		

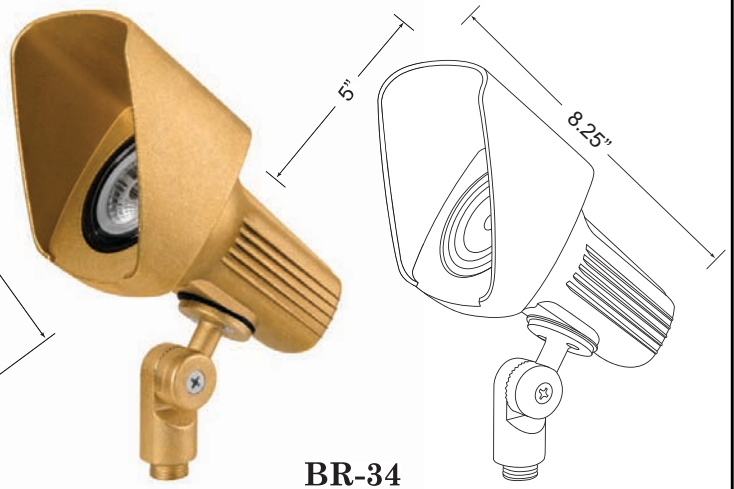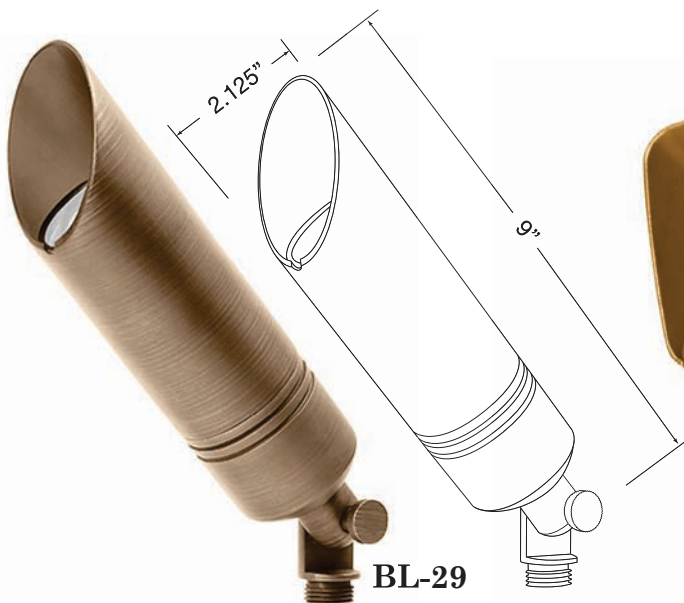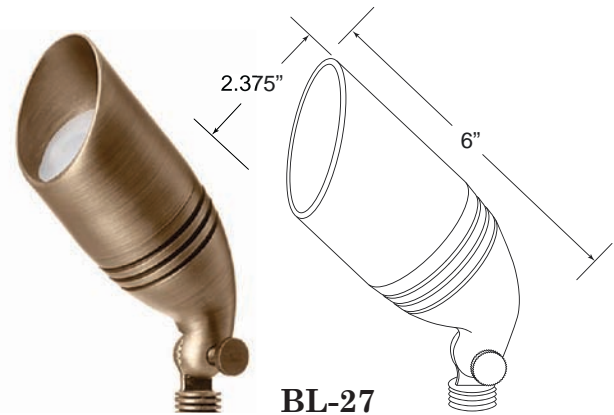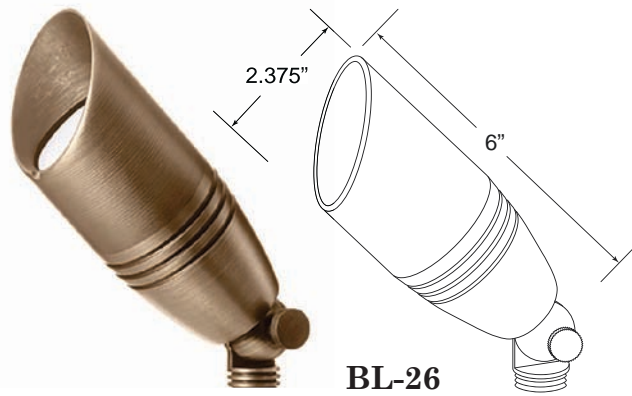


Application:	Up or Down Lighting of Trees and Homes
Construction:	Solid Cast Brass
Finish:	BL-26 / BL-27 / BL-29: Antiqued Brass BR-34: Natural Brass
Wire Lead:	25 Feet of 16-2 Wire
Stake:	X-800 Heavy Duty Ground Stake
Lamp:	BL-26 / BL-27: 3 or 6 Watt Warm White LED 35 Watt Halogen MR16 BL-29: 3, 6 or 9 Watt Warm White LED 35 Watt Halogen MR16 BL-34: 3, 6 or 9 Watt Warm White LED 35 Watt Halogen MR16
Lens:	Convex Glass
Optional Lens:	Frosted, Linear, Moonlight Blue
Warranty:	Lifetime



BL-30




BL-30-LED

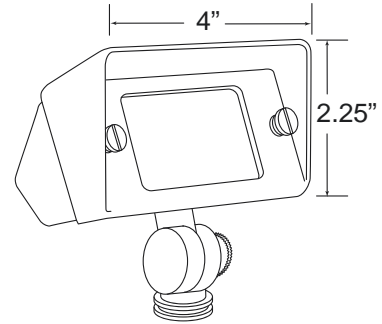


BL-31



BL-31-LED

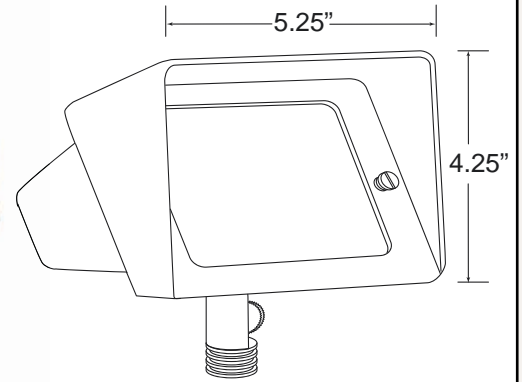


Application:	Up and Down Lighting of Walls, Signs, Homes and Water Features
Construction:	Solid Cast Brass
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Stake:	BL-30: X-800 Ground Stake
	BL-31: X-801 Heavy Duty Ground Stake
Lamp:	BL-30: 20 Watt T3 (G4) Halogen
	BL-30-LED: 3 Watt Warm White LED Panel
	BL-31: 35 Watt T4 (G6.35) Halogen
	BL-31-LED: 6 Watt Warm White LED Panel
Lens:	Clear, Frosted, Linear
Warranty:	Lifetime

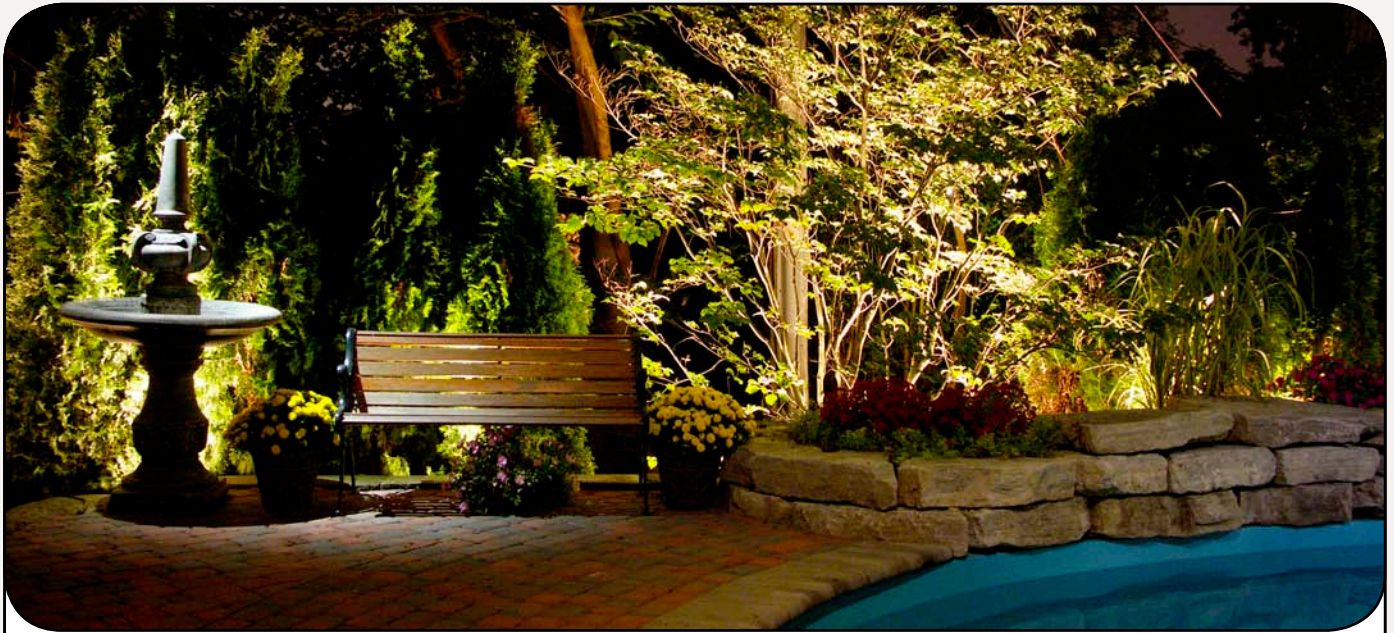



BL-32



BL-32-LED

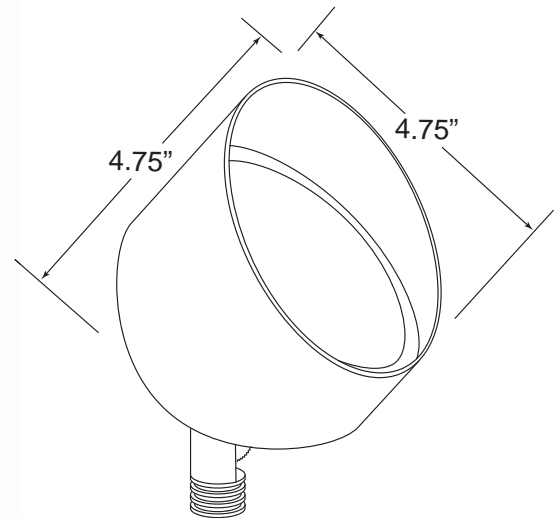

Application:	Up Lighting of Trees, Homes and Signs
Construction:	Solid Cast Brass
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Stake:	X-801 Heavy Duty Ground Stake
Lamp:	BL-32: 35 Watt Halogen Par 36
	BL-32-LED: 6, 10, 13 or 17 Watt LED
Lens:	Clear Flat Glass
Warranty:	Lifetime

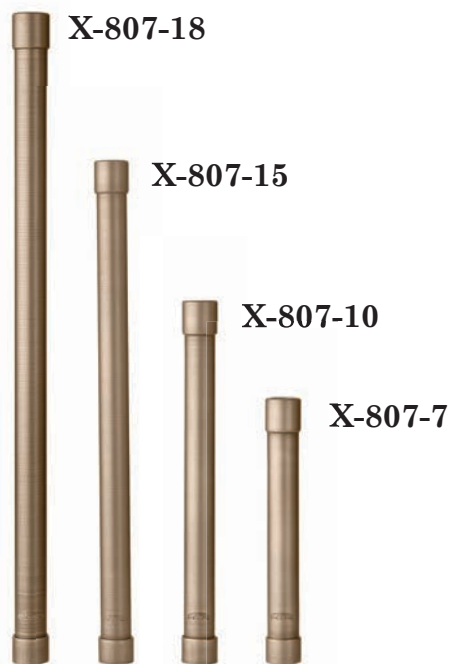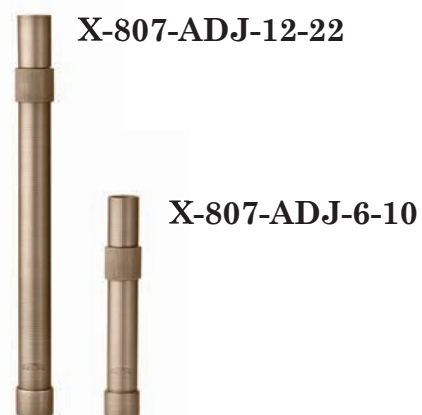Riser Extensions**Adjustable Riser Extensions****Elbowed Post****Perfect Post Assembly**

Stakes



X-800



X-801



X-802

Voltage Balancer



X-900

Wall Mount



X-813-AB

Tree Mount



X-815

Gutter Mount



X-818



X-100-BRASS RING



X-300-Brass Cover-BK



X-300-Brass Cover-LB



X-811



X-812



X-820



X-821




X-825




X-826




SD-46



SD-47




SD-01-BR




Application:	Illuminating Decks, Steps, Posts, Walls and Docks	
Construction:	Solid Brass	
Finish:	SD-46 / SD-47:	Antiqued Brass
	SD-01-BR:	Natural Brass or Powder Coated to your choice of stock colors
Wire Lead:	25 Feet of 16-2 Wire	
Lamp:	LED:	3 Watt LED Bi-Pin
	Halogen:	20 Watt T3 (G4) Bi-Pin
Lens:	SD-46 / SD-47:	Frosted or Clear Glass
Warranty:	Lifetime	




SD-403

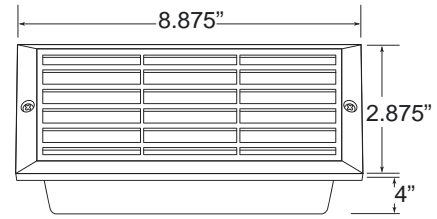


SD-404

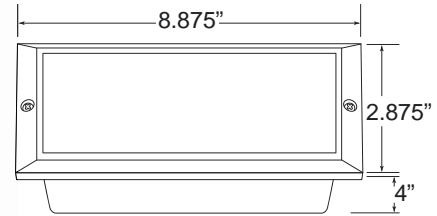


SD-405

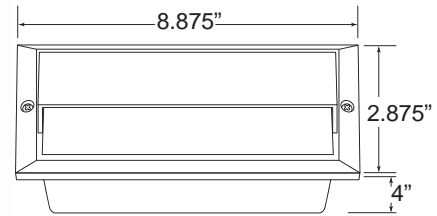


Application:	Illuminating Decks, Steps, Posts, Walls and Docks
Construction:	Solid Brass
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Lamp:	LED: 3 Watt LED Bi-Pin Halogen: 20 Watt T3 (G4) Bi-Pin
Lens:	Frosted or Clear Glass
Warranty:	Lifetime

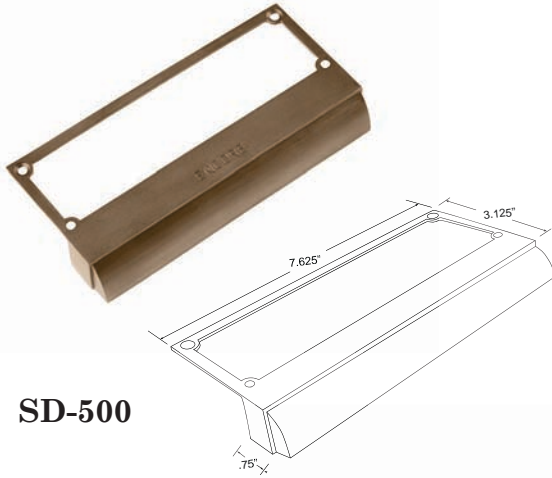

SD-500

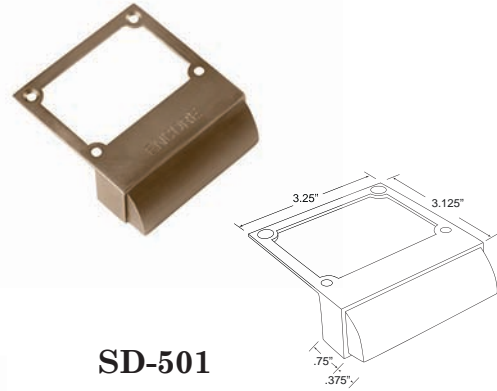


SD-501

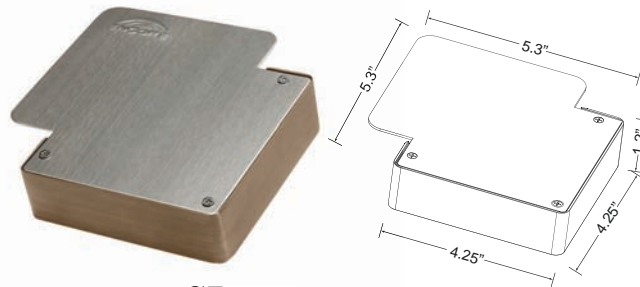


SD-505


Application:	Illuminating Retaining Walls, Seat Walls, Steps, Decks and Railings	
Construction:	Solid Cast Brass	
Finish:	Antiqued Brass	
Wire Lead:	25 Feet of 18-2 Wire	
Lamp:	SD-500:	(2) 10 Watt Halogen T3 (G4) Bi-Pin
	SD-500-LED:	3 Watt LED Strip
	SD-501:	10 Watt Halogen T3 (G4) Bi-Pin
	SD-501-LED:	2 Watt LED Strip
	SD-505:	(2) 10 Watt Halogen T3 (G4) Bi-Pin
	SD-505-LED:	(2) 3 Watt LED Strip
Lens:	Clear and Frosted Glass	
Warranty:	Lifetime	




WS-01

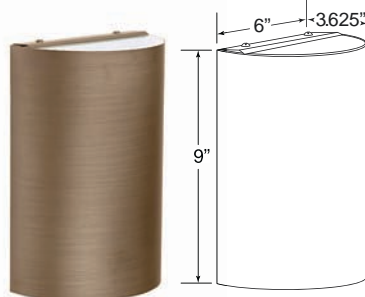


WS-02

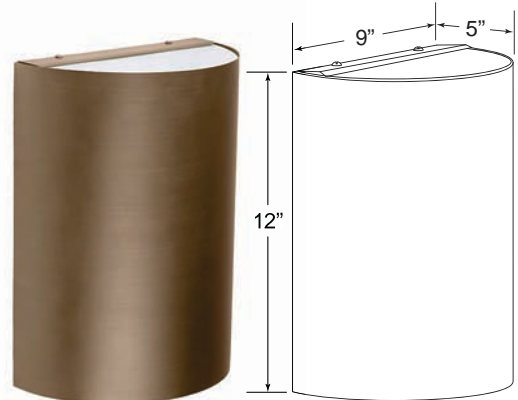

WS-03

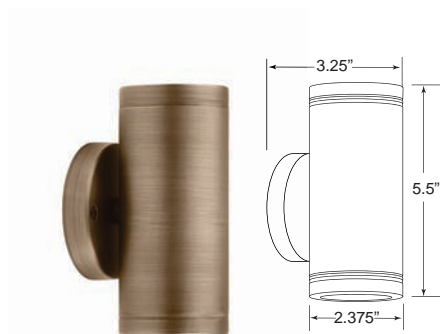



WS-04

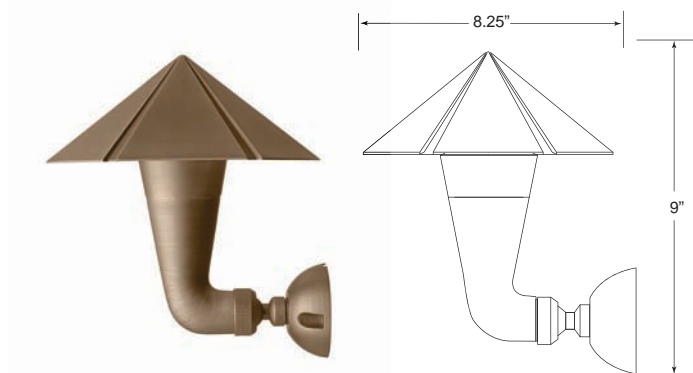

WS-100*

* ANY SHADE CAN BE USED WITH THIS FIXTURE
(SHOWN WITH BL-19 SHADE)


Application:	Illuminating Front Entrance Ways, Porches, Decks, Walls and Garages		
Construction:	Solid Brass		
Finish:	Antiqued Brass		
Lamp:	WS-01:	(2) 20 Watt Halogen T4 (G6.35) Bi-Pin	
	WS-01-LED:	(2) 3 Watt Bi-Pin LED	
	WS-02:	(2) 20 Watt Halogen T4 (G6.35) Bi-Pin	
	WS-02-LED:	(2) 3 Watt Bi-Pin LED	
	WS-03:	(2) Medium Base A-19 (12V or 120V)	
	WS-03-LED:	(2) 6 Watt A-19 LED (12V or 120V)	
	WS-04:	(2) 20 Watt Halogen MR16	
	WS-04-LED:	(2) 3 Watt MR16 LED	
	WS-100:	20 Watt Halogen MR16	
	WS-100-LED:	3 Watt MR16 LED	
Warranty:	Lifetime		

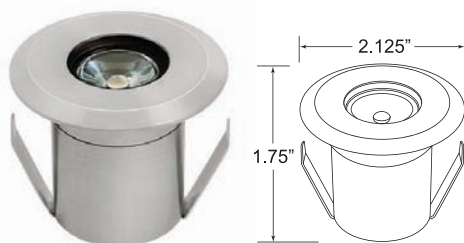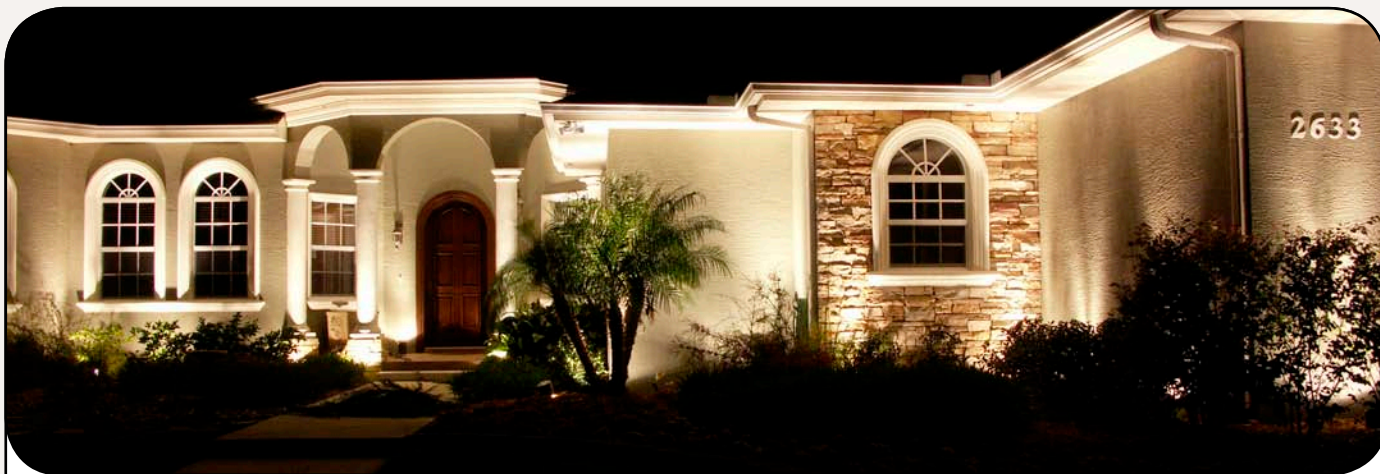

WL-90-LED



WL-91-LED

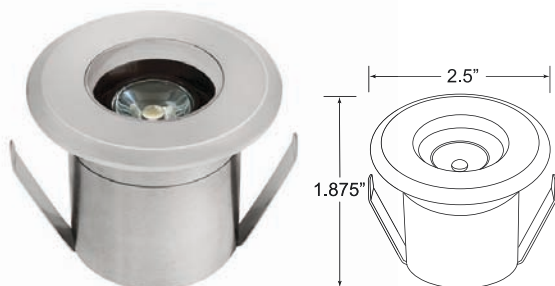

WL-92-LED



WL-93-LED

Application:	Illuminating Walks, Outdoor Kitchens, Soffit Lighting, Wall Lighting, Up or Down Lighting
Construction:	Stainless Steel
Finish:	Stainless Steel
Wire Lead:	25 Feet of 18-2 Wire
Lamp:	LED: 1 Watt Warm White
Optional Lamp:	LED: 1 Watt - Red, Green, Blue
Lens:	Clear Flat Glass
Warranty:	5 Years



WL-100



WL-101



WL-102



WL-103



WL-104

Application:	Up Lighting of Trees, Walls, Homes, Steps and Walkways
Construction:	Solid Cast Brass with Composite Sleeve
Finish:	Antiqued Brass
Wire Lead:	25 Feet of 16-2 Wire
Lamp:	LED: 3 or 6 Watt Warm White LED Halogen: 20 Watt MR16
Lens:	Clear Glass
Optional Lens:	Frosted Glass
Optional Cover:	X-100-Brass-Ring (as shown in the inset photo)
Warranty:	Lifetime

BRASS

Well Lights & Inground Lights







WL-112



WL-113

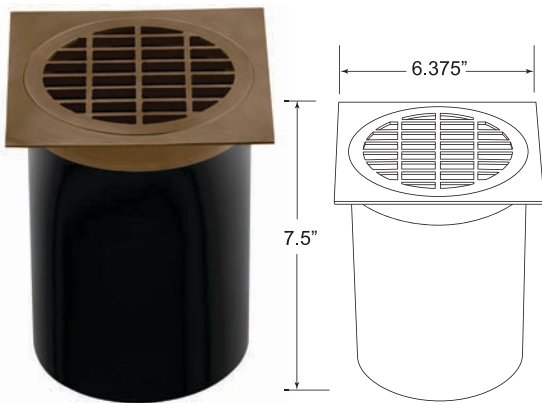


WL-115

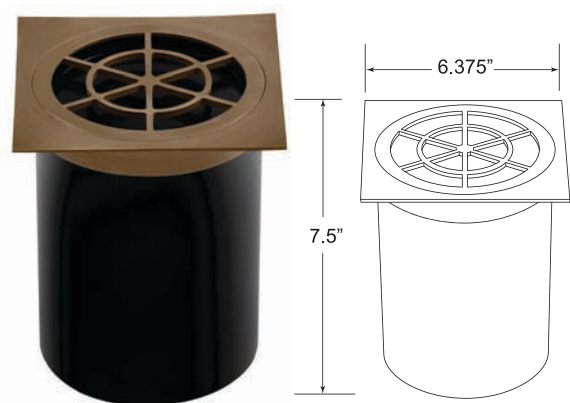


WL-116


Application:	Up Lighting of Trees, Walls, Columns, Pillars and Homes		
Construction:	Solid Cast Brass Cover with Composite Body		
Finish:	Antiqued Brass		
Wire Lead:	25 Feet of 16-2 Wire		
Lamp:	WL-112 / WL-115 / WL-116:	LED:	6, 10, 13 or 17 Watt LED
		Halogen:	35 Watt Par 36
	WL-113:	LED:	3 or 6 Watt LED
		Halogen:	35 Watt MR16
Warranty:	Lifetime		

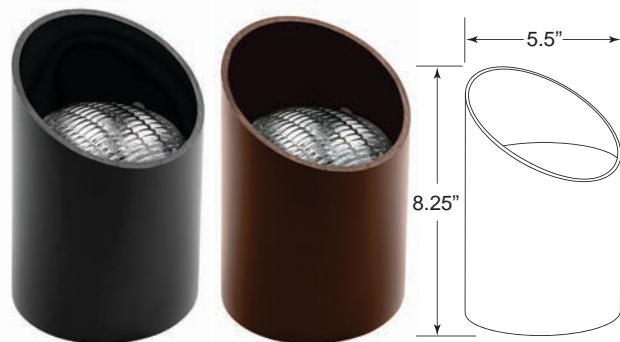


WL-235-BK / WL-235-LB

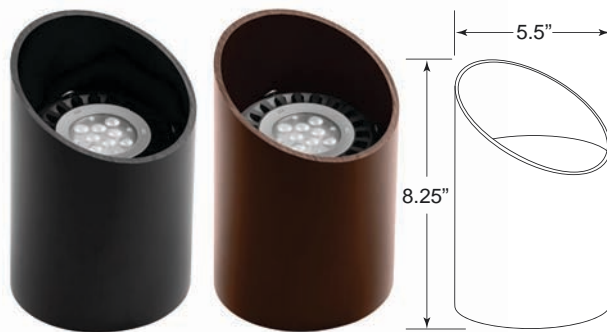

WL-235-BK-LED / WL-235-LB-LED



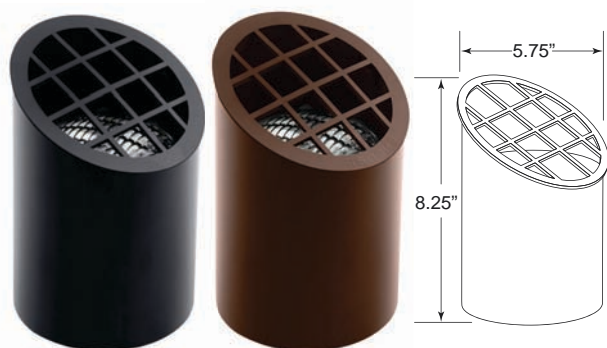


WL-335-BK / WL-335-LB

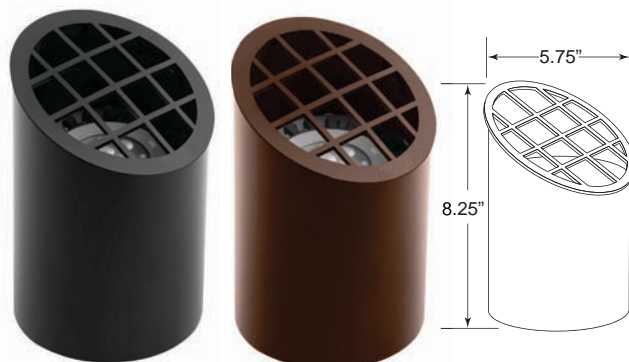


WL-335-BK-LED / WL-335-LB-LED

Application:	Up Lighting
Construction:	ABS Composite with UV Protection
Finish:	Black or Brown
Wire Lead:	25 Feet of 16-2 Wire
Lamp:	LED: 6, 10, 13 or 17 Watt Warm White LED
	Halogen: 35 Watt Par 36
Optional Lens:	WL-335: Clear or Frosted Glass
Warranty:	Lifetime

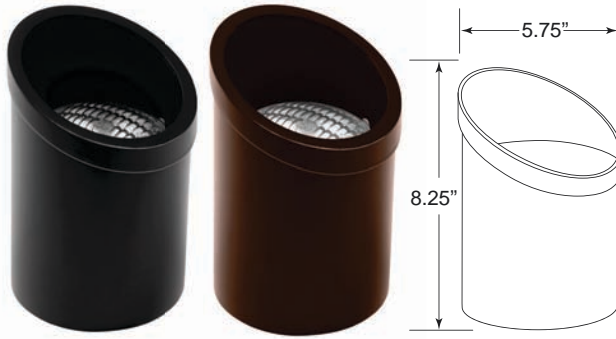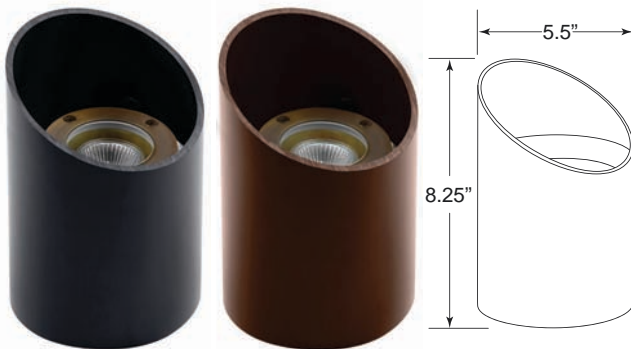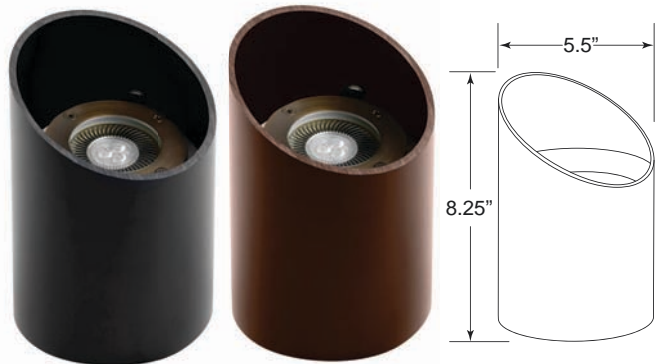**WL-435-BK / WL-435-LB****WL-435-BK-LED / WL435-LB-LED****WL-535-BK / WL-535-LB****WL-535-BK-LED / WL535-LB-LED**

Application:	Up Lighting		
Construction:	ABS Composite with UV Protection		
Finish:	Black or Brown		
Wire Lead:	25 Feet of 16-2 Wire		
Lamp:	WL-435:	LED:	6, 10, 13 or 17 Watt Warm White LED
		Halogen:	35 Watt Par 36
	WL-535:	LED:	3 or 6 Watt Warm White LED
		Halogen:	20 Watt MR16
Lens:	Clear Glass or Frosted Glass		
Warranty:	Lifetime		

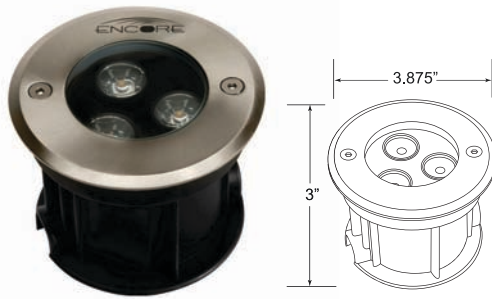

UL-54-LED-3W



UL-54-LED-3W-RGB



UL-54-LED-6W



UL-54-LED-6W-RGB




DMX CONTROLLER




RGB-REMOTE


Application:	Underwater and Inground Lighting
Construction:	Stainless Steel Potted LED Top with Composite Base
Finish:	Stainless Steel
Lamp:	LED: 3 Watt or 6 Watt Warm White or RGB
Options:	RGB Fixtures can be controlled with the DMX Controller and the RGB Remote for many color options and color changing modes
Wire Lead:	25 Feet of 16-2 Wire
Warranty:	3 Years

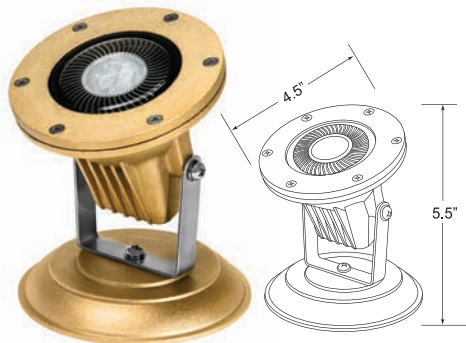

UL-55

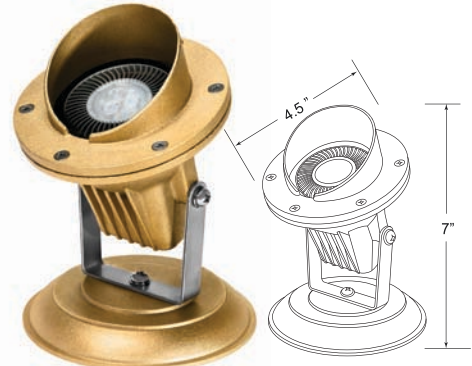

UL-56

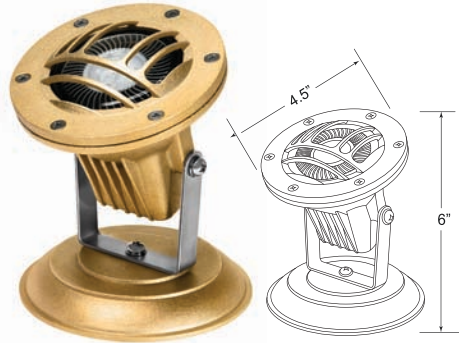

UL-57







UL-58





UL-59


Application:	Underwater Lighting	
Construction:	Brass	
Finish:	Natural Brass	
Wire Lead:	25 Feet of 16-2 Wire	
Lamp:	LED:	3 or 6 Watt Warm White LED
	Halogen:	35 Watt MR16
Lens:	UL-55, UL-56, UL-57, UL-58:	Clear Glass
	UL-59:	Frosted Glass
Warranty:	3 Years	

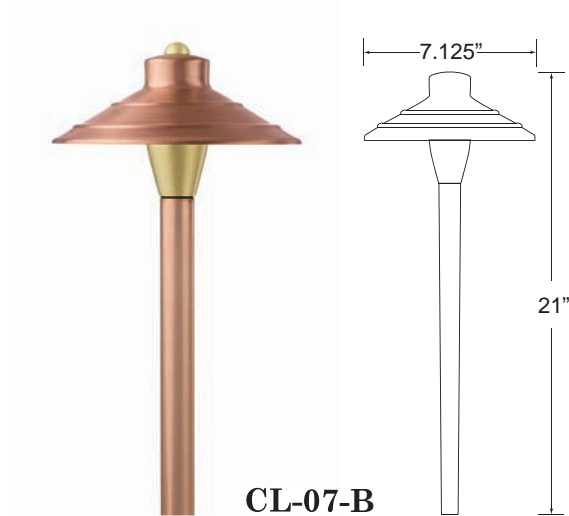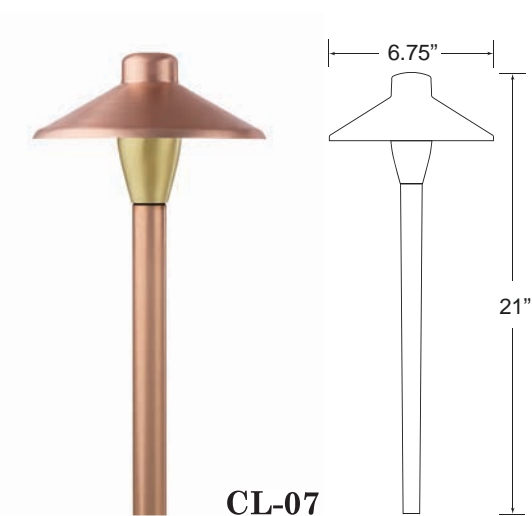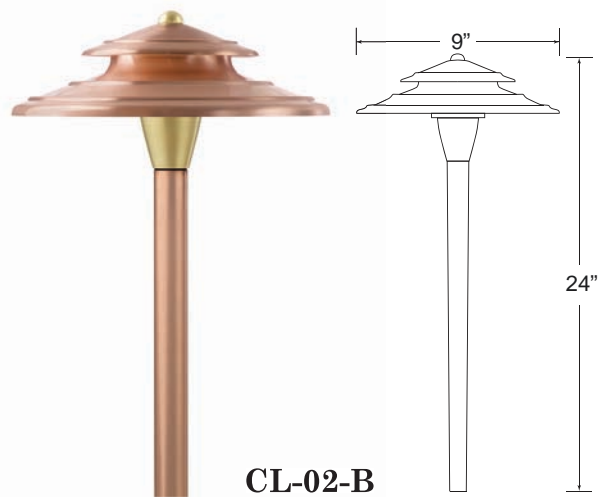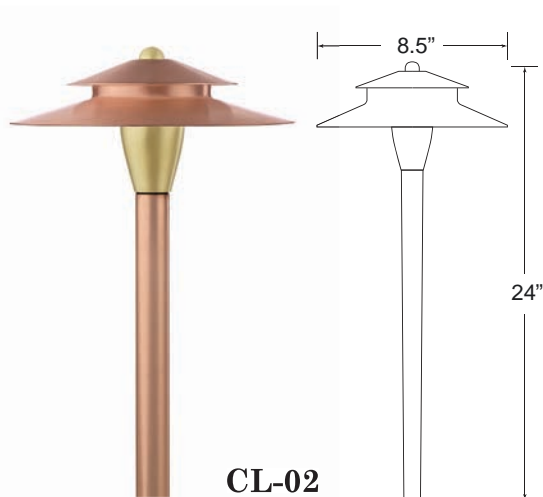


Application:	Illuminating Pathways, Bed Areas and Driveways
Construction:	Copper Shade with Solid Copper Post
Finish:	Copper
Wire Lead:	25 Feet of 18-2 Wire
Stake:	X-801 Heavy Duty Ground Stake
Lamp:	LED: 3 Watt Warm White LED Bi-Pin Halogen: 20 Watt T4 (G6.35) Bi-Pin
Lens:	Clear and Frosted Glass Dome
Height:	CL-02 / CL-02-B: 24" CL-05 / CL-07 / CL-07-B: 21"
Light Spread:	CL-02 / CL-02-B: 10-12' CL-05 / CL-07 / CL-07-B: 8-10'
Warranty:	Lifetime

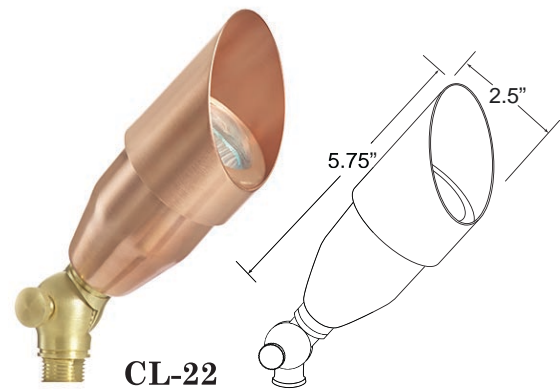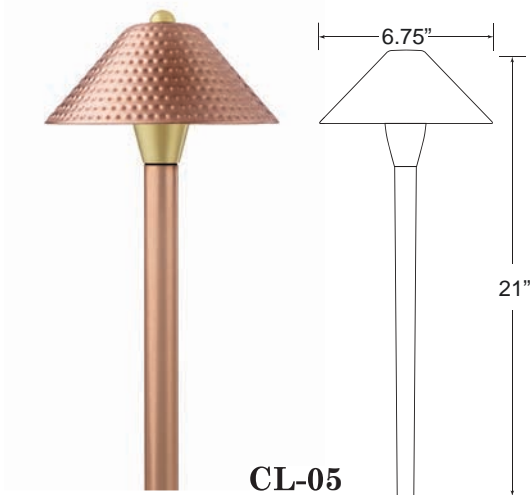


Application:	CL-05:	Illuminating Pathways, Bed Areas and Driveways
	CL-22:	Up Lighting
Construction:	Heavy Copper and Brass	
Finish:	Copper	
Wire Lead:	25 Feet of 16-2 Wire	
Stake:	X-800 Heavy Duty Ground Stake	
Lamp:	LED:	3 or 6 Watt Warm White LED
	Halogen:	35 Watt MR16
Lens:	Clear Convex Glass	
Warranty:	Lifetime	

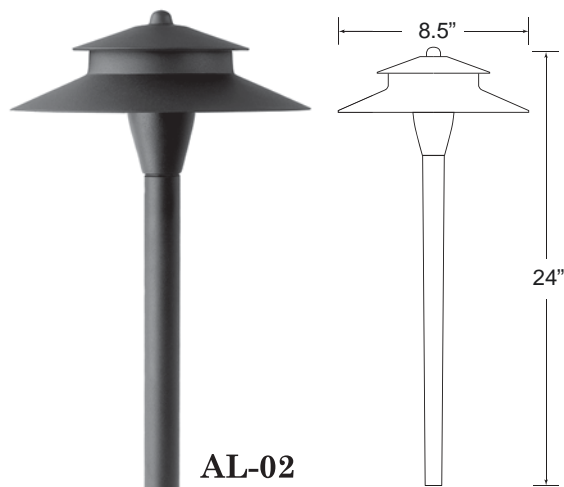

AL-02


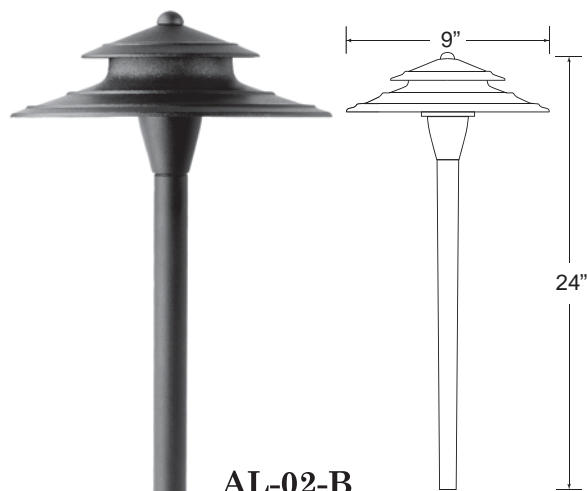


AL-02-B

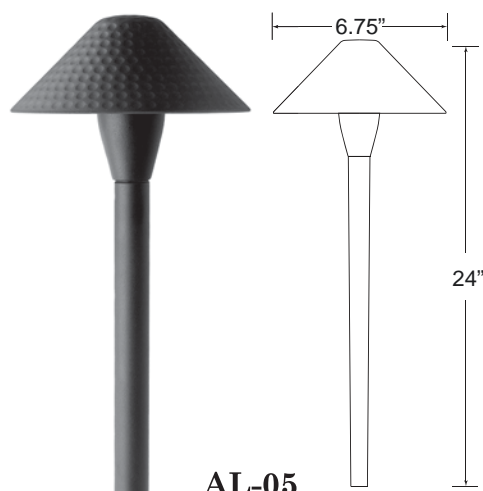

AL-05

Application:	Illuminating Pathways, Bed Areas and Driveways	
Construction:	Die Cast Aluminum Shade and Post	
Finish:	Textured Black	
Wire Lead:	25 Feet of 16-2 Wire	
Stake:	X-801 Ground Stake	
Lamp:	LED:	3 Watt Warm White LED Bi-Pin
	Halogen:	20 Watt T3 (G4) Bi-Pin
Lens:	Clear and Frosted Glass Dome	
Height:	24"	
Light Spread:	AL-02 / AL-02-B:	10-12'
	AL-05:	8-10'
Warranty:	3 Year	

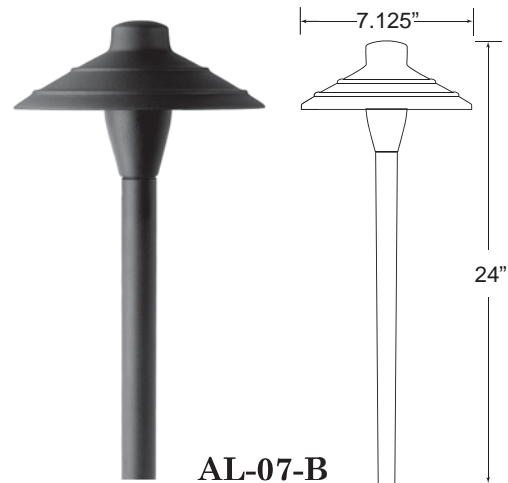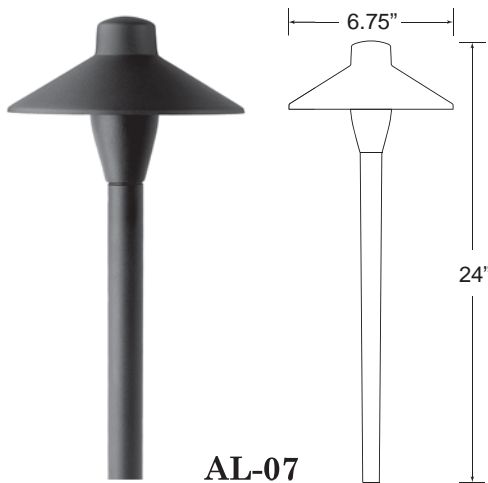


Application:	Illuminating Pathways, Bed Areas and Driveways
Construction:	Die Cast Aluminum Shade and Post
Finish:	Textured Black
Wire Lead:	25 Feet of 16-2 Wire
Stake:	X-801 Ground Stake
Lamp:	LED: 3 Watt Warm White LED Bi-Pin Halogen: 20 Watt T3 (G4) Bi-Pin
Lens:	Clear and Frosted Glass Dome
Height:	24"
Light Spread:	10'-12'
Warranty:	3 Year




AL-09-F




AL-09-H

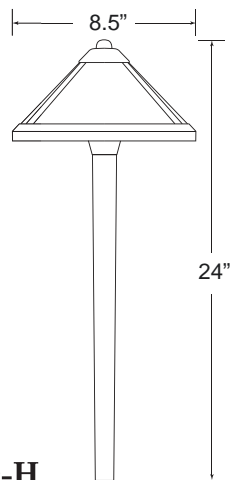


AL-10

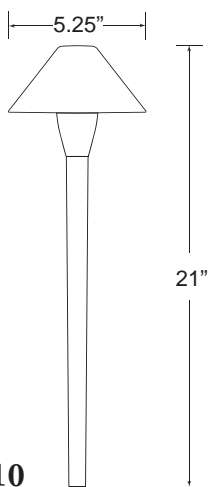


AL-11

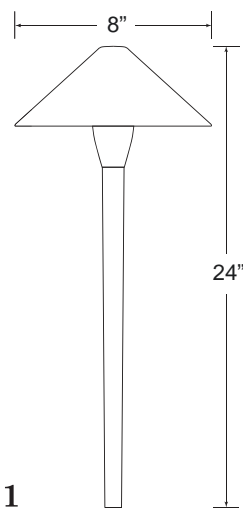


Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Die Cast Aluminum Shade and Post		
	AL-09-F / AL-09-H:	Brass Frame with Glass Shade	
Finish:	Textured Black		
Wire Lead:	25 Feet of 16-2 Wire		
Stake:	X-801 Ground Stake		
Lamp:	LED:	3 Watt Warm White LED Bi-Pin	
	Halogen:	20 Watt T3 (G4) Bi-Pin	
Lens:	Clear and Frosted Glass Dome		
Height:	AL-09 / AL-11:	24"	
	AL-10:	21"	
Light Spread:	AL-09 / AL-11:	8-10'	
	AL-10:	6-8'	
Warranty:	3 Year		

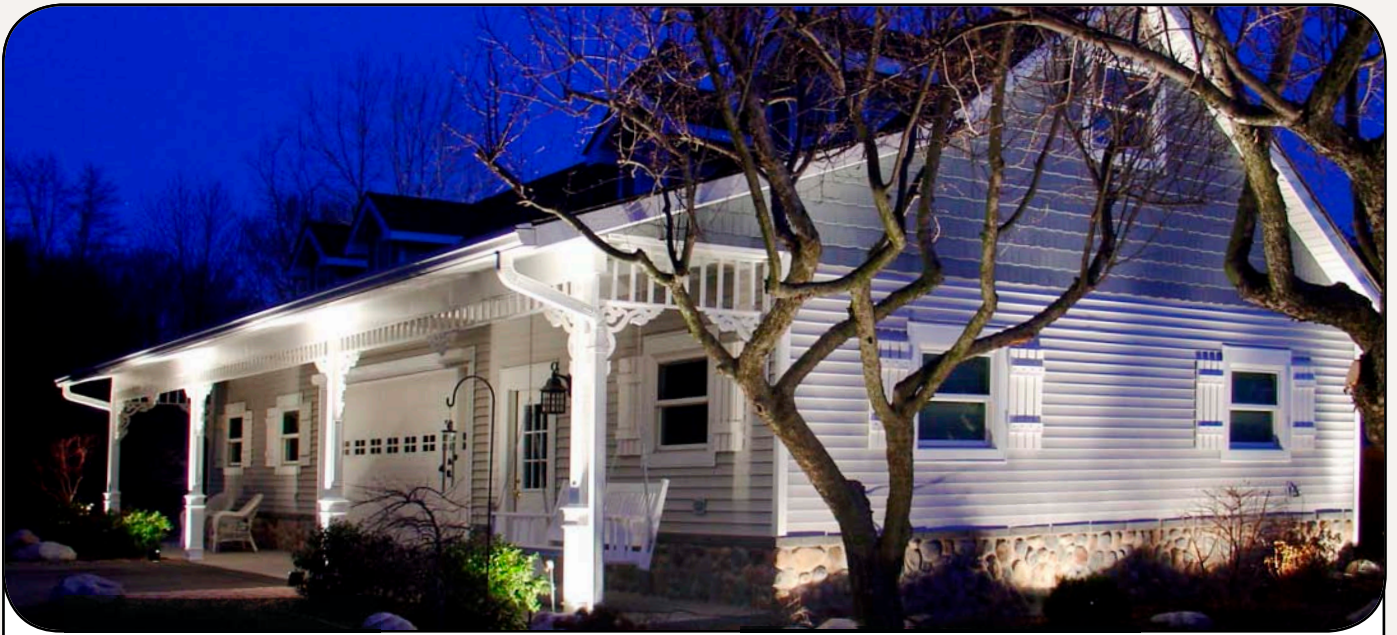


AL-13

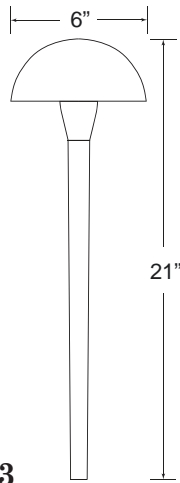

AL-14

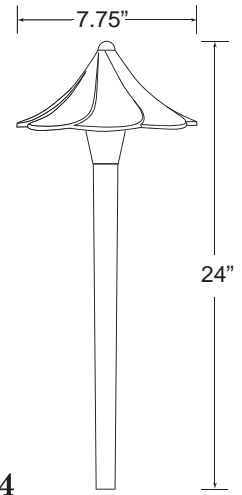

Application:	Illuminating Pathways, Bed Areas and Driveways		
Construction:	Die Cast Aluminum Shade and Post		
Finish:	Textured Black		
Wire Lead:	25 Feet of 16-2 Wire		
Stake:	X-801 Ground Stake		
Lamp:	LED:	3 Watt Warm White LED Bi-Pin	
	Halogen:	20 Watt T3 (G4) Bi-Pin	
Lens:	Clear and Frosted Glass Dome		
Height:	AL-13:	21”	
	AL-14:	24”	
Light Spread:	AL-13:	6-8’	
	AL-14:	8-10’	
Warranty:	3 Year		

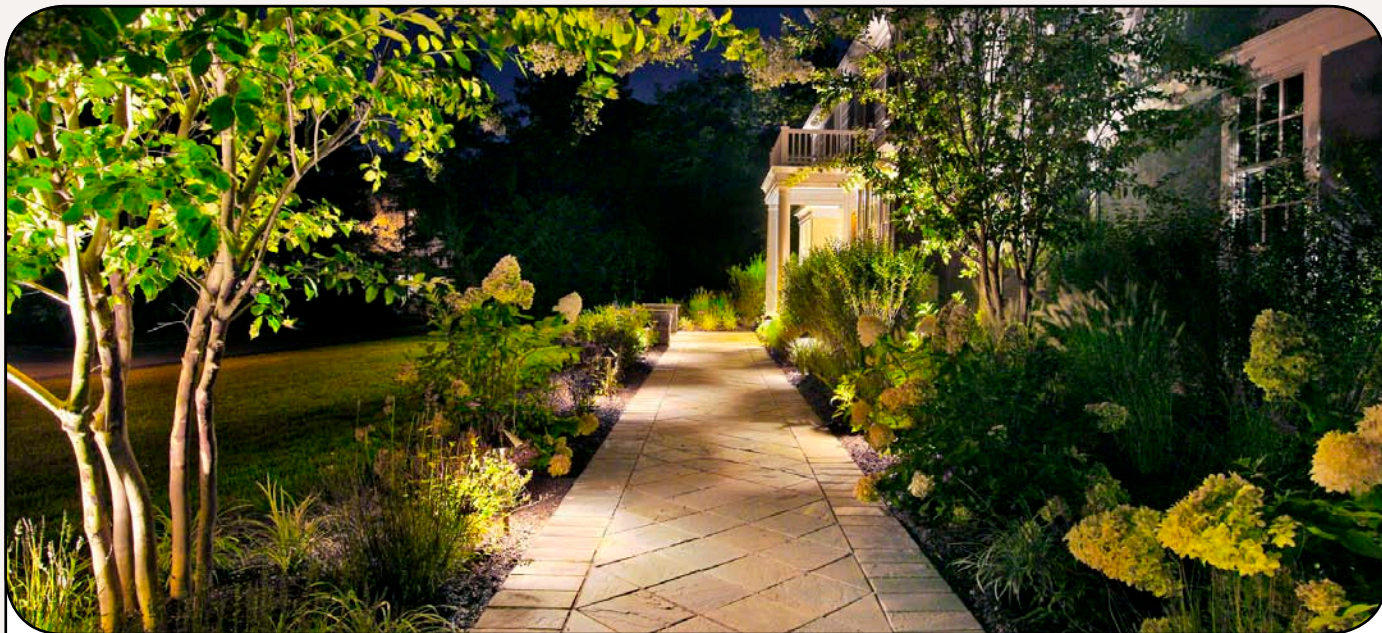

AL-26




AL-31

Application:	Up or Down Lighting		
Construction:	Die Cast Aluminum		
Finish:	Textured Black		
Wire Lead:	25 Feet of 16-2 Wire		
Stake:	X-800 Ground Stake		
Lamp:	AL-26:	LED:	3 or 6 Watt Warm White LED Bi-Pin
		Halogen:	20 Watt MR16
	AL-31:	LED:	3 or 6 Watt Warm White LED Panel
		Halogen:	20 Watt T3 (G4) Bi-Pin
Lens:	Clear Glass		
Warranty:	3 Year		



ALUMINUM

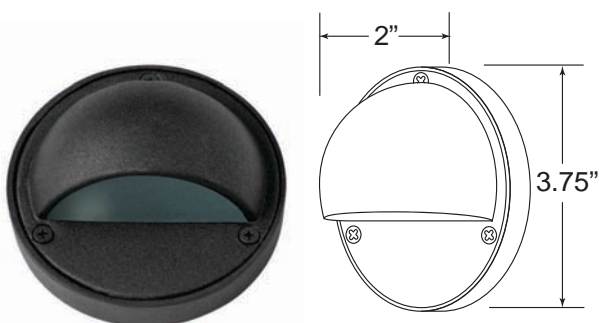

AL-46



AL-47

Application:	Illuminating Decks, Steps, Posts, Walls and Docks
Construction:	Die Cast Aluminum
Finish:	Textured Black
Wire Lead:	25 Feet of 18-2 Wire
Lamp:	LED: 3 Watt Warm White LED Bi-Pin Halogen: 20 Watt T3 (G4) Bi-Pin
Lens:	Frosted Glass or Clear Glass
Warranty:	3 Year

Path & Area Lighting



Multi-Tap Transformers

Construction: 304 Stainless Steel

Taps: 12-15 Volt Transformers are 12, 13, 14, & 15

Taps: 12-22 Volt Transformers are 12, 13, 14, 15, 16, 17, 18, 20, & 22

Primary Protection: Automatic thermal reset breaker

Secondary Protection: 25 amp, 300 watt magnetic breaker with reset switch

Torodial Core: Epoxy sealed core which is silent and up to 10% more efficient, runs much cooler than laminated cores

Terminal: Extra large 125 amp terminal blocks, holds (8) 12/2 wire

Internal Wiring: Non-corrosive, tin coated marine grade, dedicated current loop to measure primary amperage.

Timer Receptacle: Standard receptacle for plug and play options

Photo Cell Plug: Dedicated plug for easy installation of photo cell

Child Proof Safety: Lockable latched door to prevent access

Model	Volts	Wattage	Max Amps	Dimensions	Weight
TR-75SS-15	12, 13, 14, 15	75 watts	.625 amps	6 ½" L x 3 ¾" W x 4 ¼" D	8 lbs
TR-150SS-15	12, 13, 14, 15	150 watts	1.25 amps	10 ½" L x 5 ¾" W x 4 ½" D	13 lbs
TR-300SS-15	12, 13, 14, 15	300 watts	2.5 amps	16 ¼" L x 6" W x 5 ½" D	24 lbs
TR-600SS-15	12, 13, 14, 15	600 watts	5.0 amps	16 ¼" L x 6" W x 5 ½" D	30 lbs
TR-300SS-22	12, 13, 14, 15, 16, 17, 18, 22	300 watts	2.5 amps	16 ¼" L x 6" W x 5 ½" D	26 lbs
TR-600SS-22	12, 13, 14, 15, 16, 17, 18, 22	600 watts	5.0 amps	16 ¼" L x 6" W x 5 ½" D	32 lbs
TR-900SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	900 watts	7.5 amps	17 ¼" L x 7 ¾" W x 7" D	48 lbs
TR-1200SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	1200 watts	10 amps	17 ¼" L x 7 ¾" W x 7" D	51 lbs



X-TM



X-TM-DM













X-PC




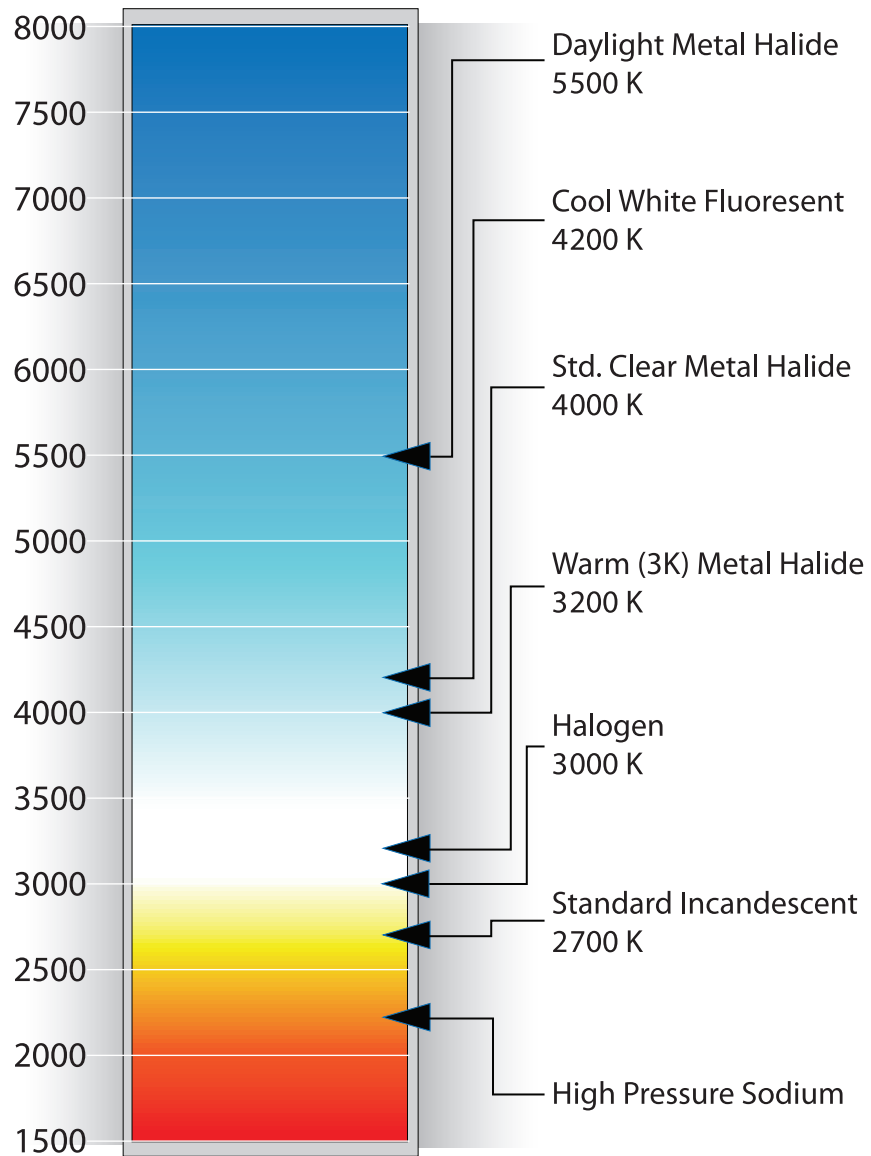



X-PC-25


Kelvin Chart




Lamp Type	Part Number	Watts	Volts	Beam Spread	Base	Lumens/CBCP	Color Temp	Rated Life (Hours)
Halogen T3 	LA-T3-5W	5	12	-	G4 Bi-Pin	60	2800	4000
	LA-T3-10W	10	12	-	G4 Bi-Pin	120	2800	4000
	LA-T3-20W	20	12	-	G4 Bi-Pin	300	2800	4000
Xenon T3 	LA-T3-10W-X	10	12	-	G4 Bi-Pin	120	3700	10,000
	LA-T3-20W-X	20	12	-	G4 Bi-Pin	250	3700	10,000
Halogen T4 	LA-T4-20W	20	12	-	GY6.35 Bi-Pin	300	2800	4000
	LA-T4-35W	35	12	-	GY6.35 Bi-Pin	600	2800	4000
	LA-T4-50W	50	12	-	GY6.35 Bi-Pin	900	2800	4000
Halogen MR-11 	LA-MR11-10W-FTB	10	12	30°	GU4 Bi-Pin	300	2900	5000
Halogen MR-16 	LA-MR16-20W-BAB	20	12	38°	GU5.3 Bi-Pin	460	3000	5000
	LA-MR16-20W-60	20	12	60°	GU5.3 Bi-Pin	450	3000	5000
	LA-MR16-35W-FMW	35	12	38°	GU5.3 Bi-Pin	950	3000	5000
	LA-MR16-35W-60	35	12	60°	GU5.3 Bi-Pin	800	3000	5000
	LA-MR16-50W-60	50	12	60°	GU5.3 Bi-Pin	1050	3000	5000
Halogen Par36 	LA-PAR36-35W-WFL	35	12	32°	Screw Terminal	900	3000	4000
Halogen BA-15 	LA-BA-15S-10W	10	12	-	Single Bayonet	120	2800	4000
	LA-BA-15S-20W	10	12	-	Single Bayonet	300	2800	4000
LED BA-15 	LA-BA-15S-10W	10	12	-	Single Bayonet	120	2800	4000
	LA-BA-15S-20W	10	12	-	Single Bayonet	300	2800	4000
LED A19 	LA-LED-A19-6.5W-2700-12V	6.5	12	-	Medium Base	360	2700	40,000
	LA-LED-A19-6.5W-3000-12V	6.5	12	-	Medium Base	380	3000	40,000
	LA-LED-A19-6.5W-2700-120V	6.5	120	-	Medium Base	380	2700	40,000
	LA-LED-A19-6.5W-3000-120V	6.5	120	-	Medium Base	380	3000	40,000
LED BL-30	LA-LED-BL-30-3W-3000	3	12	-	G4 Bi-Pin	260	3000	40,000
LED BL-31	LA-LED-BL-31-6W-3000	6	12	-	G4 Bi-Pin	470	3000	40,000
LED SD-500	LA-LED-SD-500-3W-3000	3	12	-	Crimp	220	3000	40,000
LED SD-501	LA-LED-SD-501-2W-3000	2	12	-	Crimp	160	3000	40,000
LED SD-505	LA-LED-SD-505-3W-3000	3	12	-	Crimp	240	3000	40,000

<i>Lamp Type</i>	<i>Part Number</i>	<i>Watts</i>	<i>Volts</i>	<i>Beam Spread</i>	<i>Base</i>	<i>Lumens/ CBCP</i>	<i>Color Temp</i>	<i>Rated Life (Hours)</i>
LED T3 	LA-LED-T3-25-1W-3000	1	12	-	G4 Bi-Pin	90	3000	40,000
	LA-LED-T3-13-2W-3000	2	12	-	G4 Bi-Pin	180	3000	40,000
	LA-LED-T3-18-3W-3000	3	12	-	G4 Bi-Pin	240	3000	40,000
	LA-LED-T3-27-4W-3000	4	12	-	G4 Bi-Pin	360	3000	40,000
LED MR8 	LA-LED-MR8-3W-2700	3	12	80°	G4 Bi-Pin	120	2700	40,000
LED MR11 	LA-LED-MR11-3W-3000	3	12	40°	G4 Bi-Pin	180	3000	40,000
LED MR16 	LA-LED-MR16-3W-2800-30	3	12	30°	GU5.3 Bi-Pin	240	2800	40,000
	LA-LED-MR16-3W-2800-45	3	12	45°	GU5.3 Bi-Pin	240	2800	40,000
	LA-LED-MR16-3W-2800-60	3	12	60°	GU5.3 Bi-Pin	240	2800	40,000
	LA-LED-MR16-3W-3000-30	3	12	30°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-3W-3000-45	3	12	45°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-3W-3000-60	3	12	60°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-3W-5500-45	3	12	45°	GU5.3 Bi-Pin	320	5500	40,000
	LA-LED-MR16-6W-2800-30	6	12	30°	GU5.3 Bi-Pin	450	2800	40,000
	LA-LED-MR16-6W-2800-45	6	12	45°	GU5.3 Bi-Pin	450	2800	40,000
	LA-LED-MR16-6W-2800-60	6	12	60°	GU5.3 Bi-Pin	450	2800	40,000
	LA-LED-MR16-6W-3000-30	6	12	30°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-45	6	12	45°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-60	6	12	60°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-5500-45	6	12	45°	GU5.3 Bi-Pin	510	5500	40,000
	LA-LED-MR16-6W-5500-60	6	12	60°	GU5.3 Bi-Pin	510	5500	40,000
	LA-LED-MR16-9W-2800-40	9	12	40°	GU5.3 Bi-Pin	560	2800	40,000
	LA-LED-MR16-9W-2800-60	9	12	60°	GU5.3 Bi-Pin	560	2800	40,000
	LA-LED-MR16-9W-3000-40	9	12	40°	GU5.3 Bi-Pin	580	3000	40,000
	LA-LED-MR16-9W-3000-60	9	12	60°	GU5.3 Bi-Pin	580	3000	40,000
LED PAR 36 	LA-LED-PAR36-6W-2700-40	6	12	40°	Screw Terminal	460	2700	40,000
	LA-LED-PAR36-6W-3000-40	6	12	40°	Screw Terminal	480	3000	40,000
	LA-LED-PAR36-10W-2700-40	10	12	40°	Screw Terminal	600	2700	40,000
	LA-LED-PAR36-10W-3000-40	10	12	40°	Screw Terminal	620	3000	40,000
	LA-LED-PAR36-13W-2700-40	13	12	40°	Screw Terminal	800	2700	40,000
	LA-LED-PAR36-13W-3000-40	13	12	40°	Screw Terminal	820	3000	40,000
	LA-LED-PAR36-17W-2700-40	17	12	40°	Screw Terminal	930	2700	40,000
	LA-LED-PAR36-17W-3000-40	17	12	40°	Screw Terminal	960	3000	40,000


Optional Finishes



Black Texture



Brown Metallic



White Gloss



Bronze Taupe



Dark Copper Satin



Rust



Light Gray




Dark Gray




Dark Bronze Sparkle



Dark Rust



Stainless



Desert Stone



Bronze Blast




Copper Metallic



Chrome




Antique Green



Decorative Bronze



Bronze Metallic




Nickel




Weathered Green

- Custom color matching is available
- Additional RAL colors are available using the standard RAL color system
- Actual finishes may differ slightly than as shown above
- Choosing any color other than the standard finish will result in an up-charge per fixture


The Daisy Chain

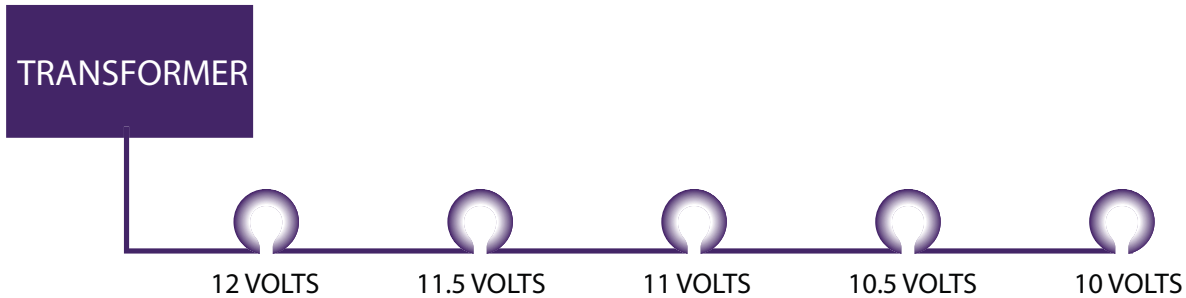


The “T” Method

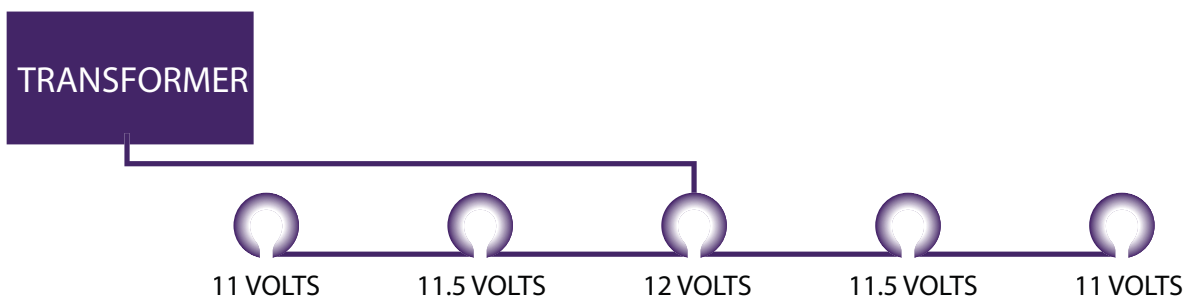

The Loop Method

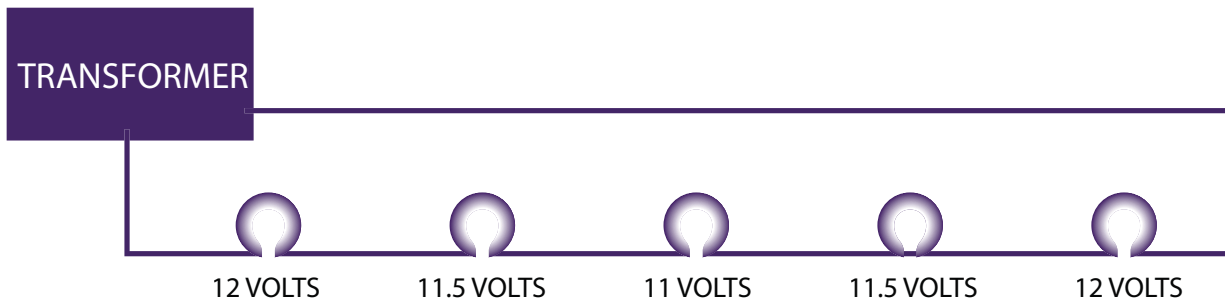

The Hub Method

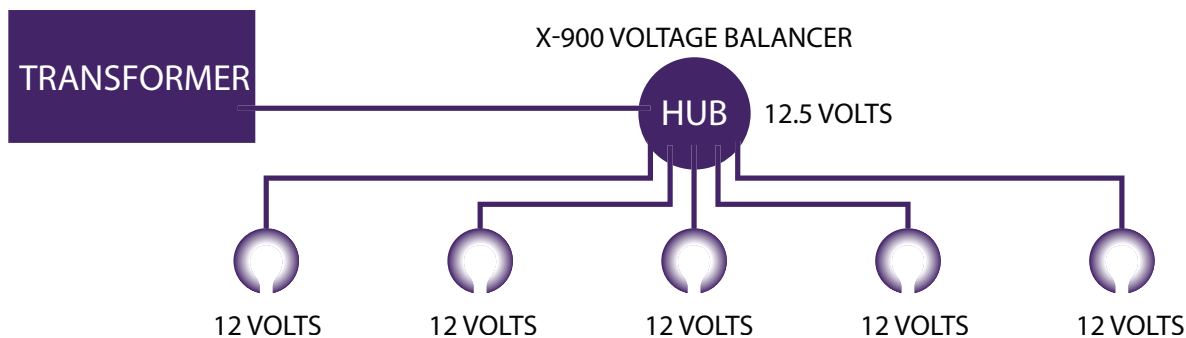

WARRANTY

Encore Landscape Lighting warrants to the owner, each new lighting product against defects in material and workmanship for a period described below. During the warranty period, Encore Landscape Lighting will repair or replace, at our discretion, any part found to be defective. Your remedy is limited solely to the replacement or repair of defective parts.

This warranty does not apply to products, including lamps, not manufactured by Encore Landscape Lighting when used in conjunction with Encore Landscape Lighting products; or where equipment is used, or installation is performed in any manner contrary to Encore Landscape Lighting's specifications or instructions, nor where equipment is altered or modified. Encore Landscape Lighting assumes no responsibility for the improper installation of its products.

Encore Landscape Lighting is not liable for indirect, incidental or consequential damages in connection with the use of equipment, including but not limited to: vegetation loss, the cost of substitute equipment or services required during malfunction, property damage or personal injury resulting from installers actions, whether negligent or otherwise.

All implied warranties, including those of merchantability and fitness of use, are limited to the duration of this express warranty. All transformers, ABS well lights, brass and copper fixtures are covered by this warranty for the life of the original installation. All aluminum Encore Landscape Lighting fixtures are covered by this warranty for a period of three years from the date of installation. The warranty does not extend to color fading by UV rays or exposure to harsh chemicals or harsh environments including salt water environments. This warranty is non-transferable. Underwater fixtures have a warranty of one year. This warranty does not include the replacement of any lamps with the expectation of the LED lamps as listed below.

LED lamps have a warranty of three years from the date of purchase. The LED lamps must be installed at the correct voltage. Any LED lamp that is installed at an excessive voltage will void the warranty. The LED Lamps must be installed in conjunction with an Encore Landscape Lighting transformer or an approved transformer by Encore Landscape Lighting. The transformer must be a magnetic type. The use of Encore Landscape Lighting's LED lamps without a magnetic type of transformer or at voltages higher than the preferred specs will void the warranty.

In order to have a valid warranty, a registration form must be completed and submitted back to Encore Landscape Lighting within 30 days of purchase. The warranty registration form can be found on our website at www.encorelandscapelighting.com. The warranty form must be fully completed.

A product is covered during the warranty period if it is returned to Encore Landscape Lighting, freight prepaid. Our factory will inspect the product to determine if it is defective under the terms of the warranty. All products must have an RGA form (return goods authorization) completed by the customer and sent to Encore Landscape Lighting for approval. Once approved, a RGA number will be issued. No returns will be accepted without the RGA number. Encore Landscape Lighting does not compensate for any labor, diagnosis, repair, replacement, shipping fees or transportation.

