

The Encore Landscape Lighting System™ combined with Encore's superior products will create beauty, safety, and security all in a simple-to-install system. The Encore Landscape Lighting System allows for easy installation of fixtures and transformers while delivering balanced voltage to each fixture, creating a consistent lighting portrait to every project.

The Encore Perfect Post Path System™ offers the flexibility of interchanging the shades on each path light without replacing the entire fixture allowing for cost effective seasonal design changes.

TABLE OF CONTENTS

Brass Products

Path and Area Lighting.....	2-11, 13-15, 20
Bollards.....	16-19, 22-27
Up and Down Lighting	12, 28-31
Tiki Torch	21
Deck and Step Lighting.....	32-34
Hardscape and Under The Cap Lighting	35
Inground and Soffit Lighting	36-37
Underwater Lighting.....	36, 42-43
Well Lights and Inground Lighting.....	38-41
Hanging Lights.....	44-45
Wall Sconces	46-47
Accessories	48-51

Copper Products

Path and Area Lighting.....	52
Up Lighting	53

Aluminum Products

Path and Area Lighting.....	19, 54-56
Up and Down Lighting	57-58

Support Equipment and Information

Powder Coat Finishes	59
Transformers and Accessories	60-61
Lamp Guide.....	62-66
Kelvin Chart	67
Warranty	68

Note: All products in this catalog are 12 volt unless noted.

DARE TO COMPARE

- Our exceptional quality and innovative product line uses the finest materials available, including solid brass, copper, stainless steel, and a superior grade of cast aluminum.
- Our innovative fixtures are user friendly and can be adjusted without the use of tools.
- Our lifetime warranty and unsurpassed service is second to none.
- Our state of the art factory and shipping department allow for orders to be processed and shipped the same day.

Encore Landscape Lighting Products are the choice by professionals who require reliable products of superior quality that will last a lifetime.



www.EncoreLandscapeLighting.com


Encore Landscape Lighting

2277 Elliott Drive
Troy, MI 48083



Phone: 248-299-1919 • Fax: 248-299-1911
EncoreLandscapeLighting@hotmail.com

© 2020 Encore Landscape Lighting

PATH & AREA LIGHTING

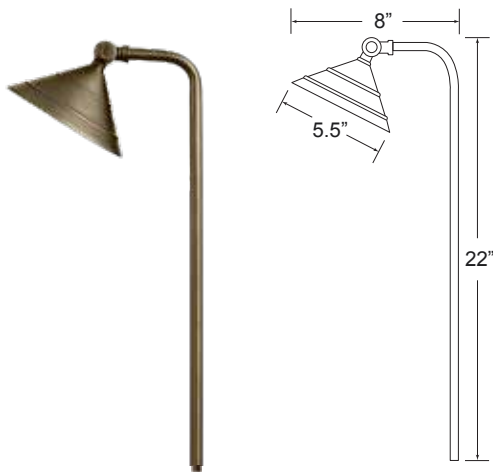**BL-01-B****BL-02 W/ ADJ RISER**

(The adjustable risers are available with all pathway lights with the perfect post system)

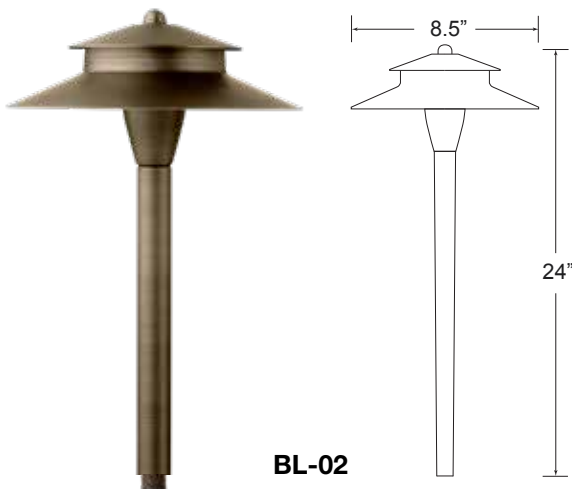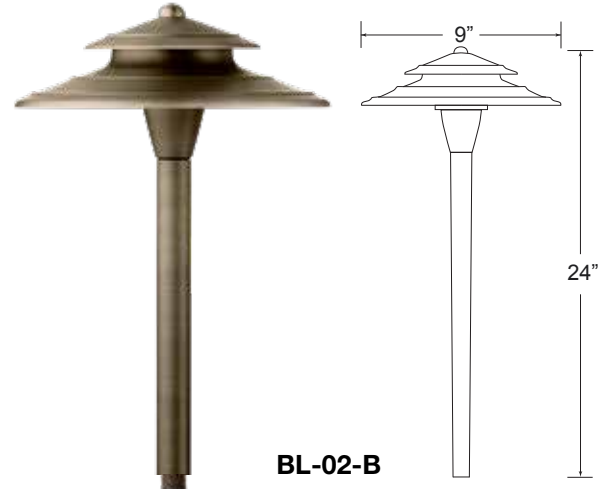**BL-02****BL-02-B**

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	BL-01-B	Spun Brass Articulating Shade with Angled Tubular Brass Post	
	BL-02 / BL-02-B	Solid Cast Brass Shade with Heavy Brass Post	
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED (BL-02 & BL-02-B)		
LENS	Clear and Frosted Glass Dome		
HEIGHT	BL-01-B	22"	Light Spread: 6-12'
	BL-02 / BL-02-B	24"	Light Spread: 10-12'
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36" (For use with BL-02 & BL-02-B)		





BL-05 W/ ADJ RISER


(The adjustable risers are available with all pathway lights with the perfect post system)




BL-04

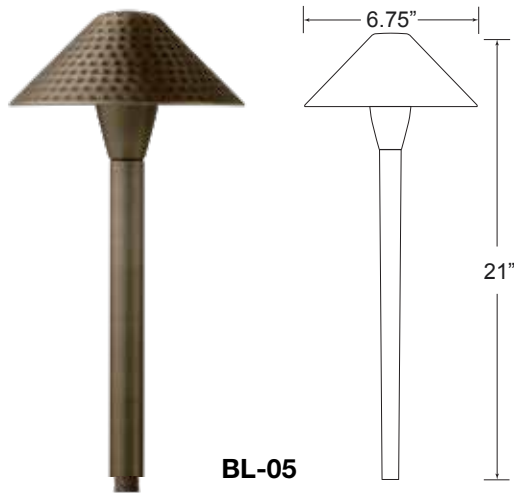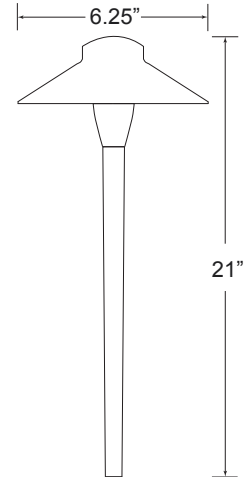

BL-05



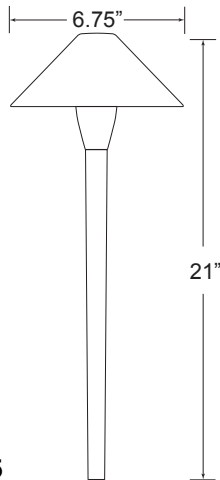


BL-06

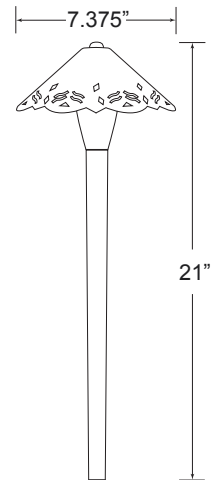

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-801 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome
HEIGHT	21" Light Spread: 8-10'
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36"

PATH & AREA LIGHTING

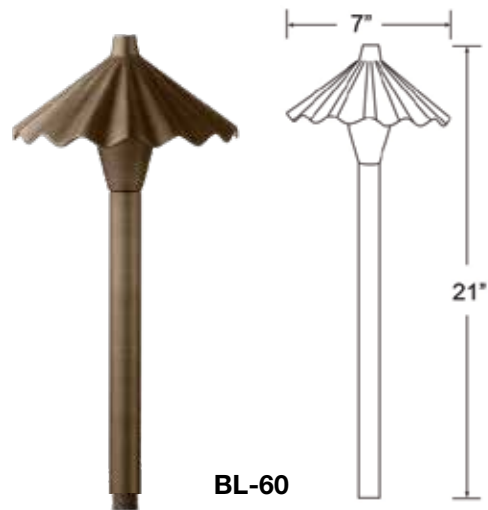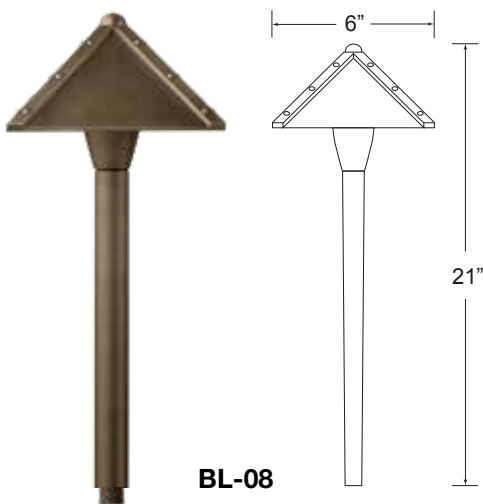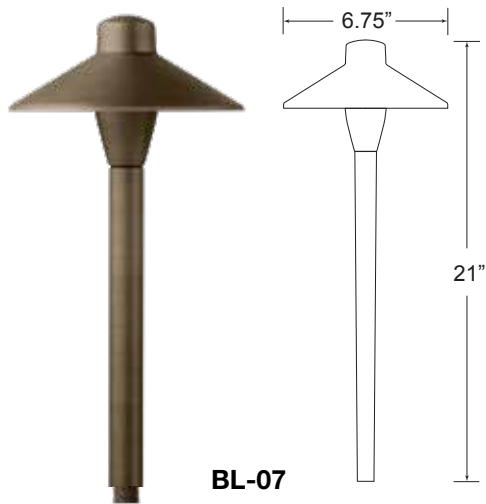

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	BL-07 / BL-07-B	21"	Light Spread: 8-10'
	BL-08	21"	Light Spread: 7-9'
	BL-60	21"	Light Spread: 7-9'
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36"		




BL-09-A




BL-09-F




BL-09-H

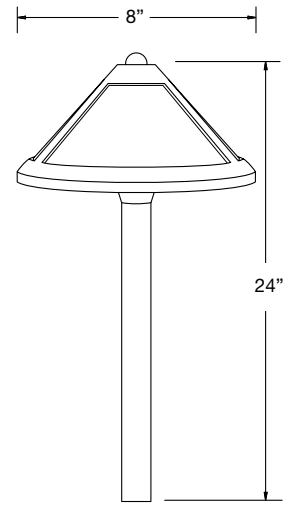

BL-10


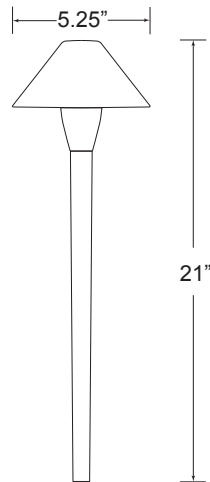


BL-11

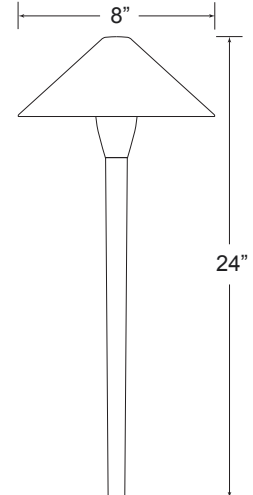

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post		
	BL-09	Glass Shade	
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	BL-09-A / BL-09-F / BL-09-H	24"	Light Spread: 9-11'
	BL-10	21"	Light Spread: 6-8'
	BL-11	21"	Light Spread: 8-10'
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36"		

PATH & AREA LIGHTING

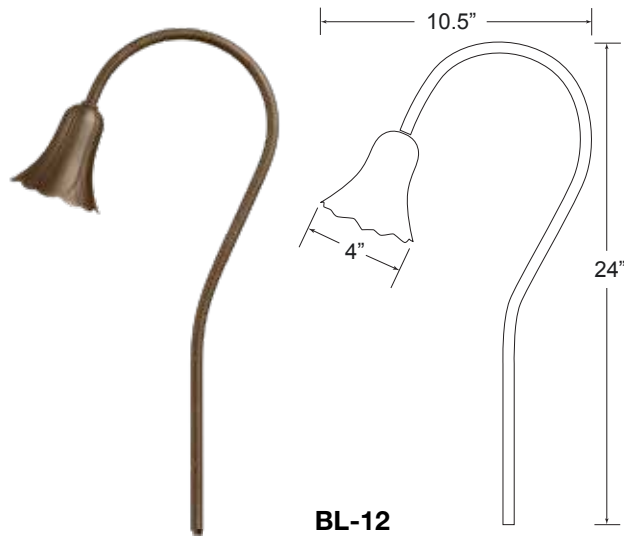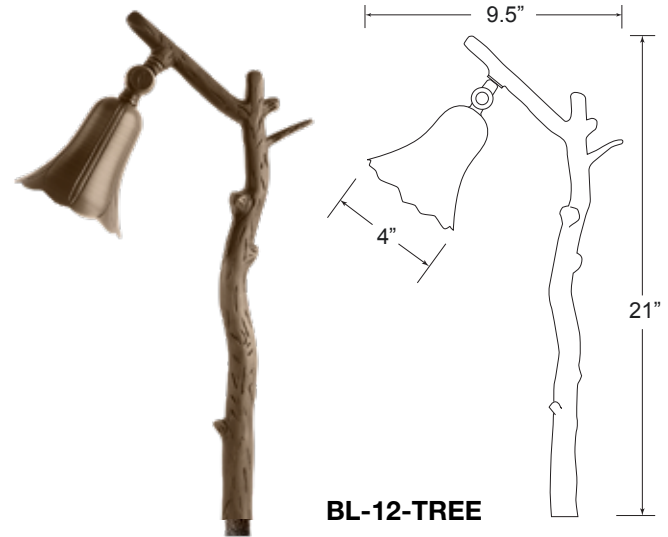**BL-12****BL-12-TREE****BL-13****BL-14**

APPLICATION Illuminating Pathways, Bed Areas and Driveways

CONSTRUCTION Solid Cast Brass Shade with Heavy Brass Post

FINISH Antiqued Brass

WIRE LEAD 25 Feet of 18-2 Wire

STAKE X-801 Heavy Duty Ground Stake

LED LAMP 3 Watt LED G4 Bi-Pin

LED LAMP OPTIONS 1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin

Wi-Fi RGBW LED (BL-13 & BL-14)

LENS Clear and Frosted Glass Dome



HEIGHT **BL-12** 24" **Light Spread:** 4-6'

BL-12-TREE 21" **Light Spread:** 4-10'

BL-13 21" **Light Spread:** 7-9'



BL-14 24" **Light Spread:** 8-10'

OTHER OPTIONS Adjustable Telescoping Post: 6-10", 12-22", 18-36"
(For use with BL-13 & BL-14)

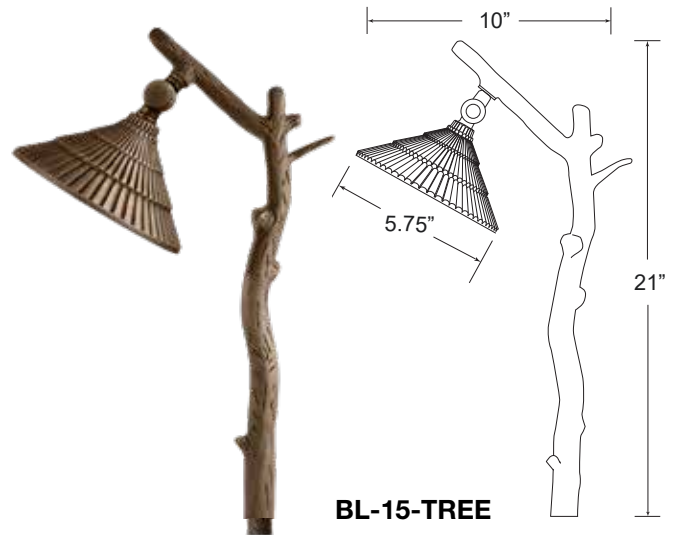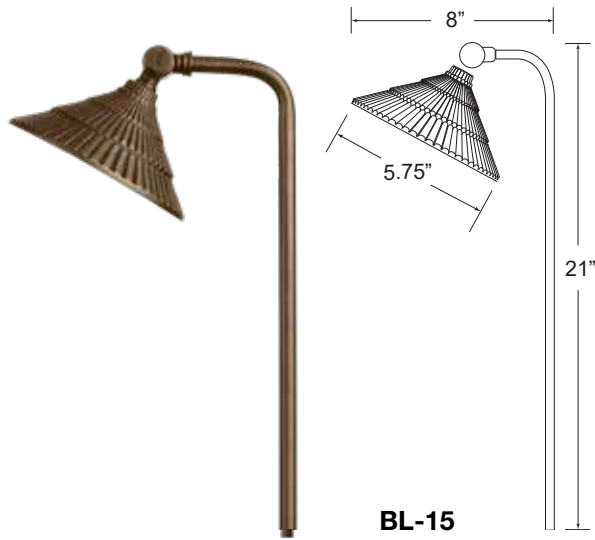


APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin		
	Wi-Fi RGBW LED (BL-17 & BL-63)		
LENS	Clear and Frosted Glass Dome		
HEIGHT	BL-15	24"	Light Spread: 7-9'
	BL-15-TREE	21"	Light Spread: 4-10'
	BL-17	21"	Light Spread: 8-10'
	BL-63	23"	Light Spread: 6-8'
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36" (For use with BL-17 & BL-63)		

PATH & AREA LIGHTING

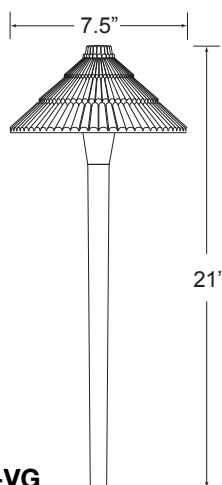
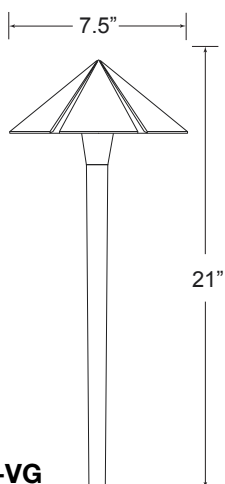
**BL-18****BL-18-VG****BL-19****BL-19-VG**

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post
FINISH	Antiqued Brass / Aged Verde
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-801 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome
HEIGHT	21" Light Spread: 8-10'
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36"

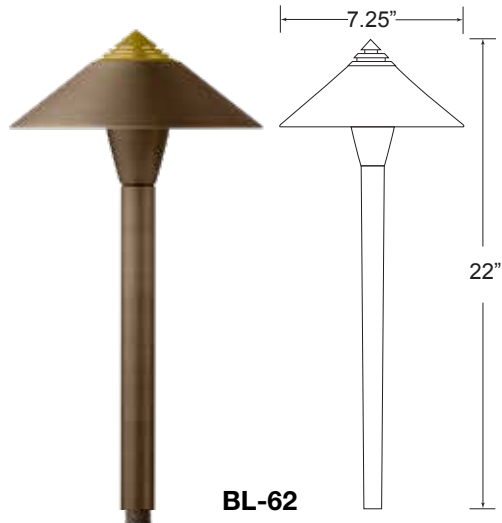

APPLICATION	Illuminating Pathways, Bed Areas and Driveways	
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	3 Watt LED G4 Bi-Pin	
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED	
LENS	Clear and Frosted Glass Dome	
HEIGHT	BL-61 22"	Light Spread: 7-9'
	BL-62 22"	Light Spread: 8-10'
	BL-64 21"	Light Spread: 8-10'
	BL-65 24"	Light Spread: 12-15'
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36"	


PATH & AREA LIGHTING

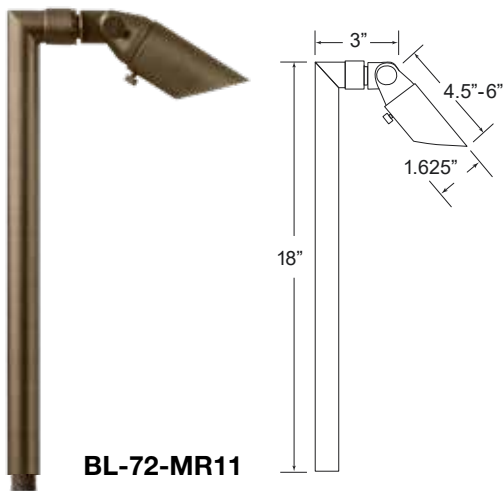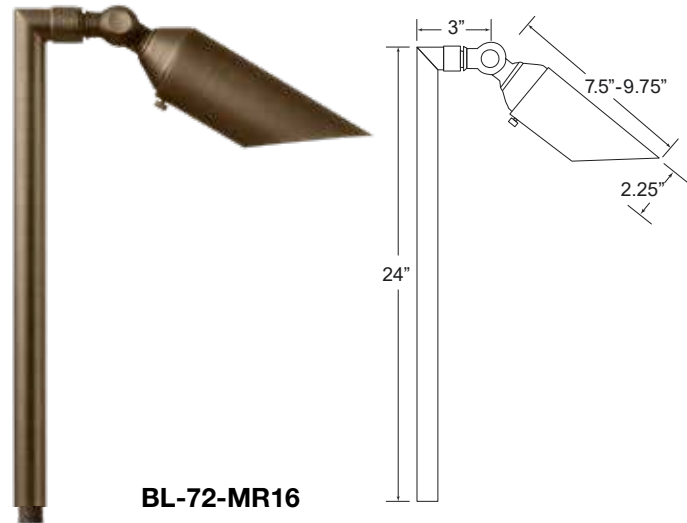**BL-71****BL-72-MR8****BL-72-MR11****BL-72-MR16**


APPLICATION	Illuminating Pathways, Bed Areas and Driveways.	
CONSTRUCTION	Solid Cast Brass Bullet Light with Brass Elbowed Post	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	BL-71	3 Watt G4 LED Bi-Pin
	BL-72-MR8	3 Watt MR8 LED Bi-Pin
	BL-72-MR11	3 Watt MR11 LED Bi-Pin
	BL-72-MR16	4, 6, 9 Watt MR16 LED Bi-Pin
LED LAMP OPTIONS	Bluetooth RGBW LED (BL-72-MR16)	
LENS	Clear Flat Glass (BL-72's)	
OPTIONAL LENS	Frosted Flat Glass	
HEIGHT	BL-71	23"
	BL-72-MR8	18"
	BL-72-MR11	18"
	BL-72-MR16	24"




BL-73

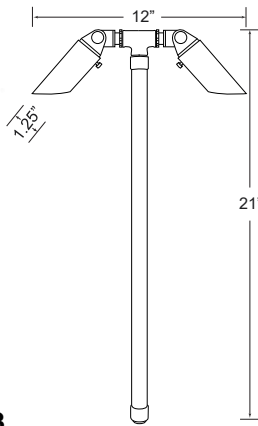


BL-74

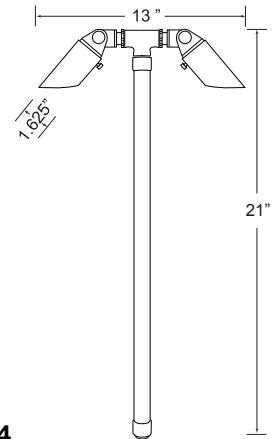

BL-75



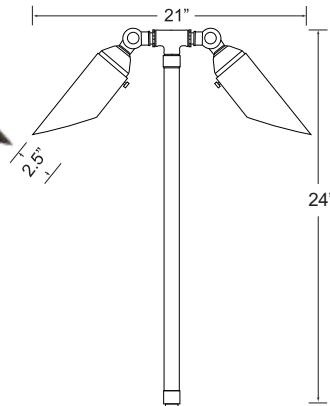


BL-76

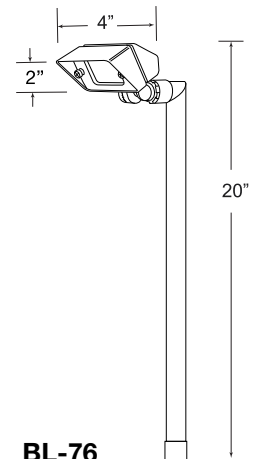


APPLICATION	Illuminating Pathways, Bed Areas and Driveways	
CONSTRUCTION	Solid Cast Brass Bullet Light with Brass Tee/Elbowed Post	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	BL-73	(2) 3 Watt MR8 LED Bi-Pin
	BL-74	(2) 3 Watt MR11 LED Bi-Pin
	BL-75	(2) 4, 6, 9 Watt MR16 LED Bi-Pin
	BL-76	3 Watt LED Panel
LED LAMP OPTIONS	Bluetooth RGBW LED (BL-75)	
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	
HEIGHT	BL-73 / BL-74	21"
	BL-75	24"
	BL-76	20"


DOWN LIGHTING

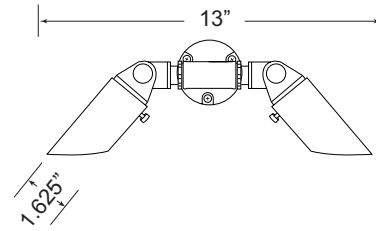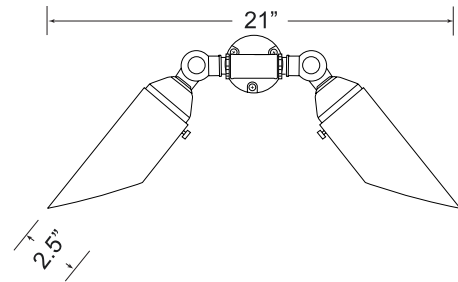**BL-77-MR8****BL-77-MR11****BL-77-MR16**


APPLICATION	Down Lighting from Walls or in Trees	
CONSTRUCTION	Solid Cast Brass Bullet Light with Brass Tee and Brass Round Mount	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	BL-77-MR8	3 Watt MR8 LED Bi-Pin
	BL-77-MR11	3 Watt MR11 LED Bi-Pin
	BL-77-MR16	4, 6, 9 Watt MR16 LED Bi-Pin
LED LAMP OPTIONS	Bluetooth RGBW LED (BL-77-MR16)	
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	

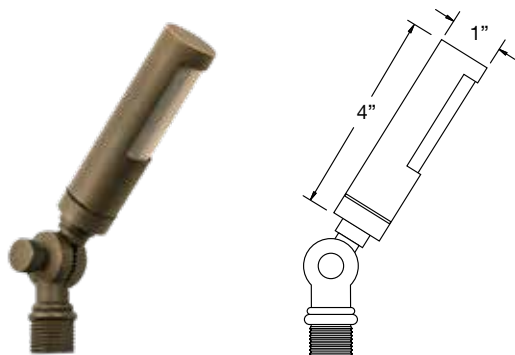

BL-78

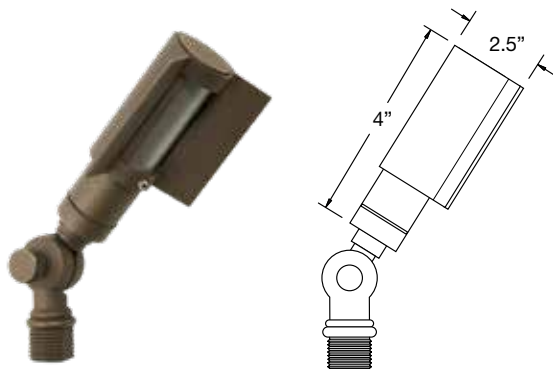

BL-78 with Shroud

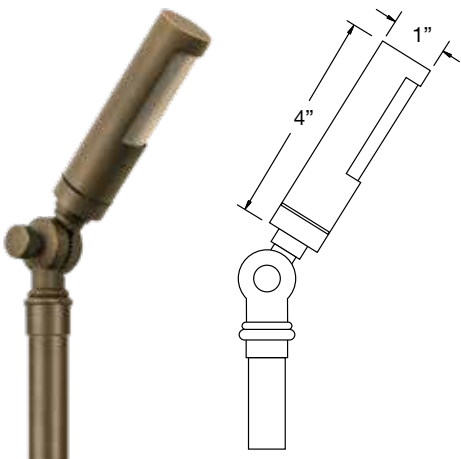


BL-78 with Riser

APPLICATION	Illuminating Pathways and Bed Areas
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-800 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt LED G4 Bi-Pin
LENS	Frosted Glass


PATH & AREA LIGHTING




APPLICATION	Illuminating Pathways, Bed Areas and Driveways	
CONSTRUCTION	MDS-01 / MDS-02	Stainless Steel
	MDB-03 / MDB-04	Solid Cast Brass
FINISH	MDS-01 / MDS-02	Black Textured Powder Coat
	MDB-03 / MDB-04	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	MDS-01 / MDS-02	3 Watt Integrated LED
	MDB-03 / MDB-04	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	MDB-03 / MDB-04	1 Watt, 2 Watt, LED G4 Bi-Pin
LENS	Frosted Glass	
HEIGHT	MDS-01	16"
	MDS-02	22"
	MDB-03	21"
	MDB-04	22"
		Light Spread: 5-7'
		Light Spread: 6-8'
		Light Spread: 6-8'
		Light Spread: 6-8'

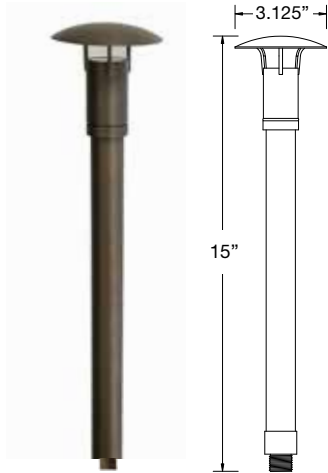

MDB-05

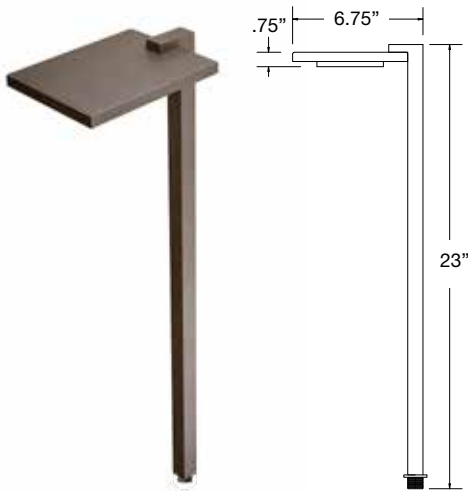

MDB-06

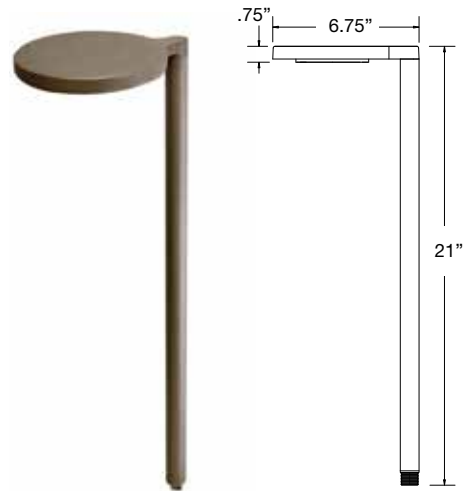

MDB-07

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	4 Watt Integrated LED		
LENS	Frosted Glass		
HEIGHT	MDB-05	15"	Light Spread: 4-6'
	MDB-06	23"	Light Spread: 8-10'
	MDB-07	21"	Light Spread: 8-10'

PATH & AREA LIGHTING / BOLLARDS



APPLICATION Illuminating Pathways, Bed Areas and Driveways

CONSTRUCTION Solid Cast Brass

FINISH Antiqued Brass

WIRE LEAD 25 Feet of 18-2 Wire

MOUNTING Brass Mounting Plate with X-801 Heavy Duty Ground Stake


LED LAMP 4 Watt LED MR16

LED LAMP OPTIONS 1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin
3 Watt MR8 or MR11 LED
6 Watt MR16 LED, 9 Watt MR16
Bluetooth RGBW LED
Wi-Fi RGBW LED


LENS Clear Glass

HEIGHT **BOL-01** 14" **Light Spread:** 8-10'
BOL-02 / BOL-20 26" **Light Spread:** 10-12'


SPECIAL FEATURE Surface Mount or Stake Mount

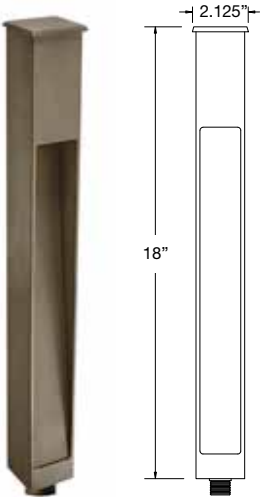


BOL-03

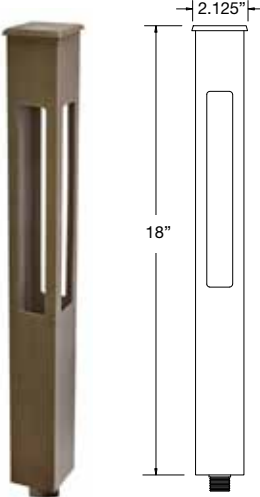

BOL-04

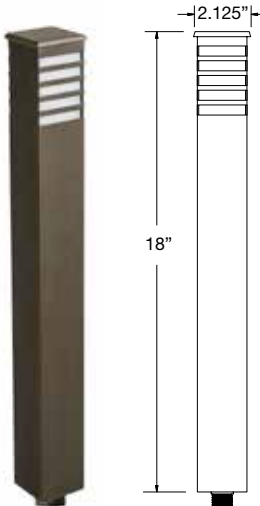


BOL-13

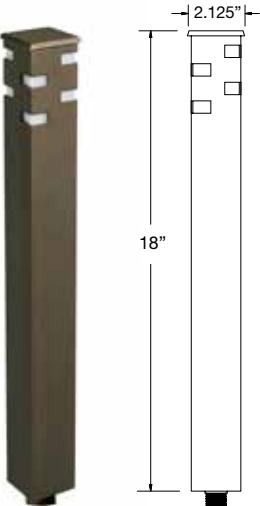


BOL-14

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	BOL-03 / BOL-04		4 Watt Integrated LED
	BOL-13 / BOL-14		4 Watt LED G4 Bi-Pin
HEIGHT	BOL-03	18"	Light Spread: 4-6'
	BOL-04	18"	Light Spread: 6-8'
	BOL-13	18"	Light Spread: 4-6'
	BOL-14	18"	Light Spread: 4-6'


PATH & AREA LIGHTING / BOLLARDS

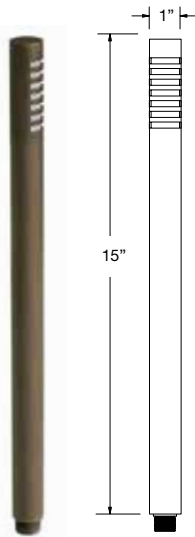


BOL-09

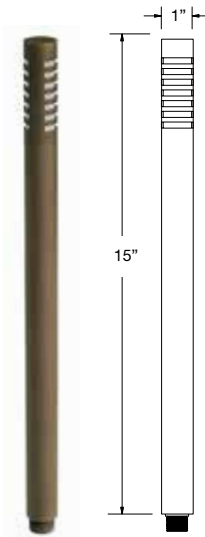


BOL-10

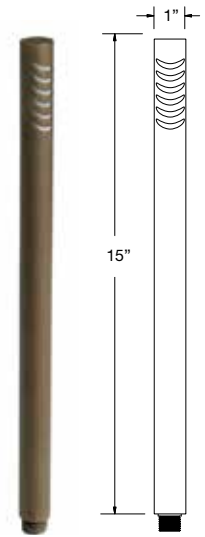

BOL-11

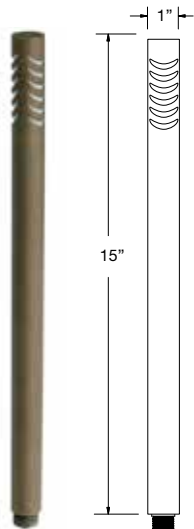


BOL-12

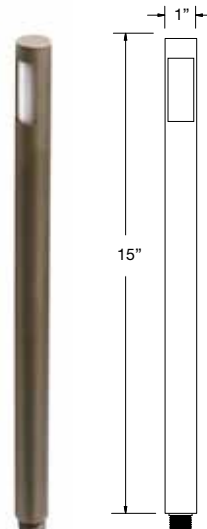

BOL-15



APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-800 Heavy Duty Ground Stake		
LED LAMP	3 Watt G4 LED Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt G4 LED Bi-Pin		
HEIGHT	BOL-09	15"	Light Spread: 4-6'
	BOL-10	15"	Light Spread: 6-8'
	BOL-11	15"	Light Spread: 4-6'
	BOL-12	15"	Light Spread: 6-8'
	BOL-15	15"	Light Spread: 6-8'

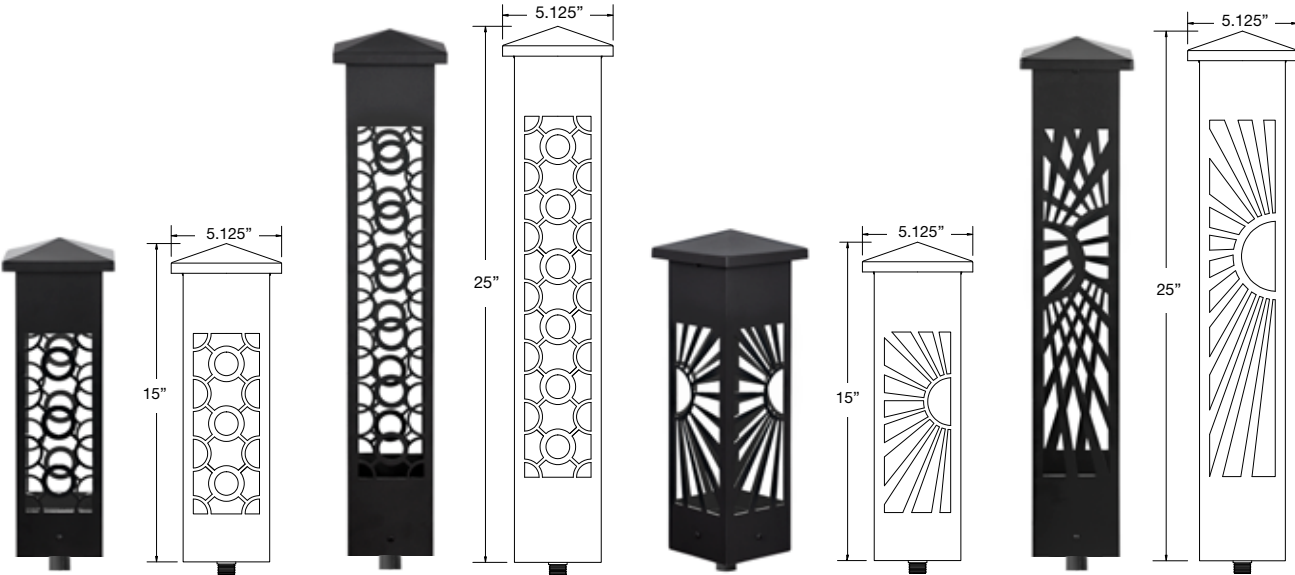


BOL-05 BOL-06 BOL-07 BOL-08

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Aluminum		
FINISH	Black Powder Coat		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	4 Watt LED MR16		
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED		
HEIGHT	BOL-05	15"	Light Spread: 8-10'
	BOL-06	25"	Light Spread: 10-12'
	BOL-07	15"	Light Spread: 8-10'
	BOL-08	25"	Light Spread: 10-12'

PATH & AREA LIGHTING

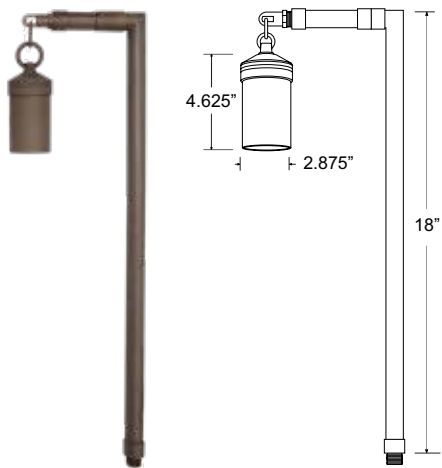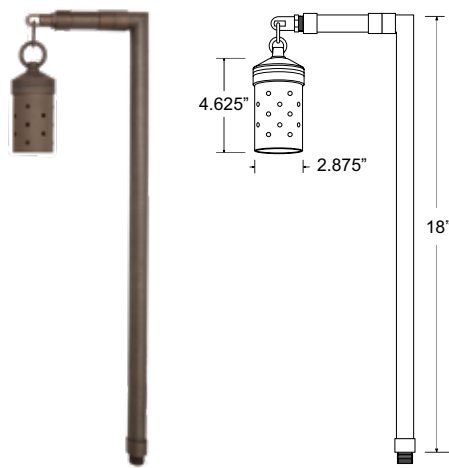**BL-201-HL****BL-202-HL****BL-203-HL**

APPLICATION	Illuminating Pathways, Bed Areas and Driveways	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	BL-201-HL	A19 Medium Base LED Lamp 2 Watt, 4 Watt or 6 Watt
	BL-202-HL	MR16 LED 4 Watt or 6 Watt G4 LED 4 Watt Bi-Pin Wi-Fi RGBW LED
	BL-203-HL	G4 LED 4 Watt Bi-Pin Wi-Fi RGBW LED

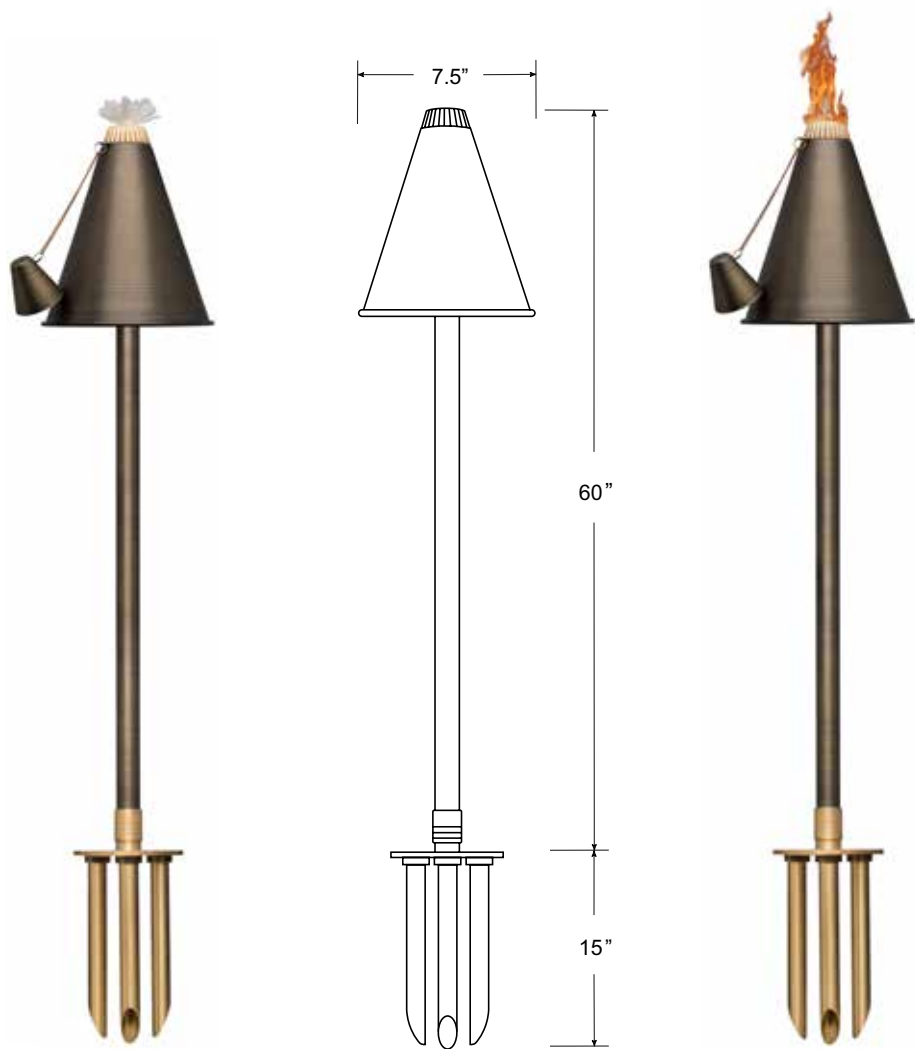

TIKI TORCH

APPLICATION	Illuminate Pathways, Bed Areas, Driveways, Deck Areas, Entertainment Areas
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post Two in One - Oil Filled Reservoir for Flame Effect and LED Light Source
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-805 Super Heavy Duty Three Prong Brass Ground Stake
LED LAMP	4 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome
HEIGHT	60" Light Spread: 12-15'

PATH & AREA LIGHTING / BOLLARDS

**BOL-102****BOL-102-B****BOL-105**

Fixture Height	15"	15"	15"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

**BOL-202****BOL-202-B****BOL-205**

Fixture Height	26"	26"	26"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted



BOL-106



BOL-107



BOL-107-B

Fixture Height	15"	15"	15"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included



BOL-206



BOL-207



BOL-207-B

Fixture Height	26"	26"	26"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted

PATH & AREA LIGHTING / BOLLARDS

**BOL-108****BOL-109-F****BOL-109-H**

Fixture Height	15"	15"	15"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

**BOL-208****BOL-209-F****BOL-209-H**

Fixture Height	26"	26"	26"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted



BOL-111



BOL-113



BOL-114

Fixture Height	15"	15"	15"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included



BOL-211



BOL-213



BOL-214

Fixture Height	26"	26"	26"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted

PATH & AREA LIGHTING / BOLLARDS

**BOL-117****BOL-118****BOL-119**

Fixture Height	15"	15"	15"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

**BOL-217****BOL-218****BOL-219**

Fixture Height	26"	26"	26"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted



BOL-162



BOL-164



BOL-165

Fixture Height	15"	15"	15"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included



BOL-262



BOL-264







BOL-265




Fixture Height	26"	26"	26"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted

UP & DOWN LIGHTING

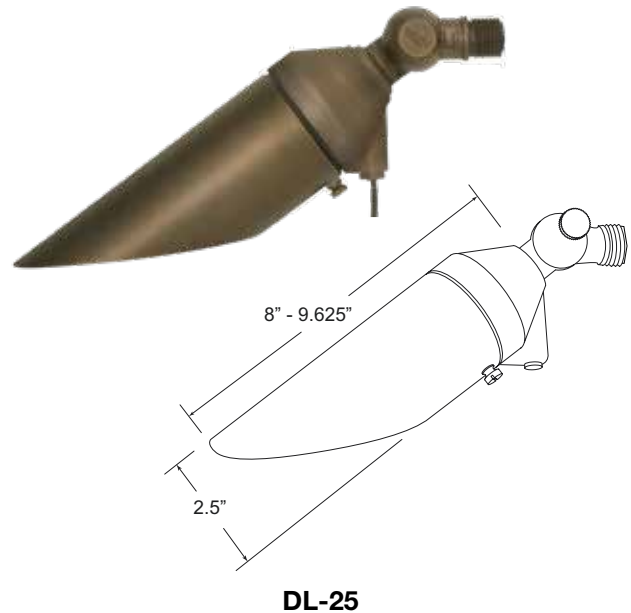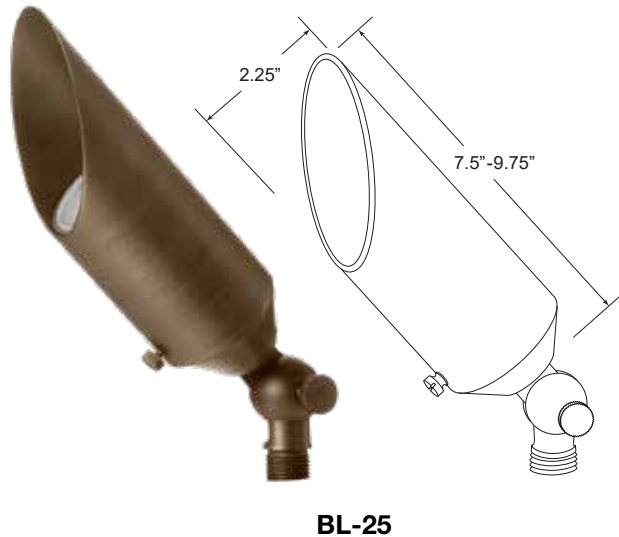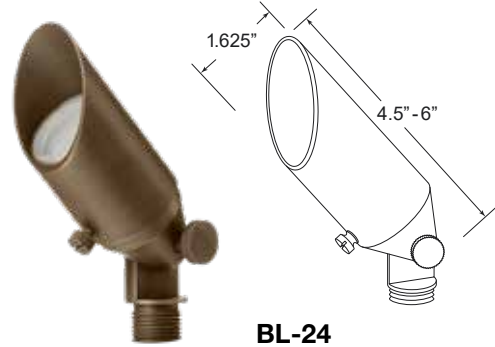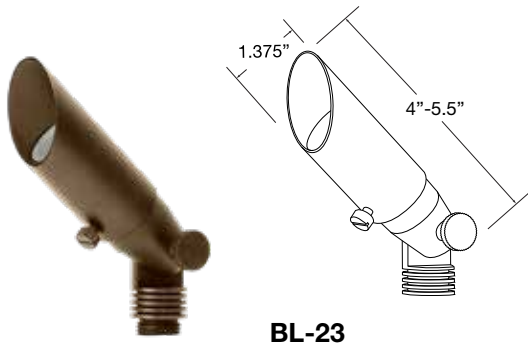

APPLICATION	Up or Down Lighting of Trees, Homes and Structures	
CONSTRUCTION	Solid Cast Brass with Telescoping, 360 Degree Rotatable Shroud	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
	DL-25	50 Feet of 18-2 Wire
STAKE	X-800 Heavy Duty Ground Stake (BL-23, BL-24, BL-25)	
LED LAMP	BL-23	3 Watt LED MR8
	BL-24	3 Watt LED MR11
	BL-25 / DL-25	4 Watt, 6 Watt, or 9 Watt LED MR16
LED LAMP OPTIONS	BL-25 / DL-25	Bluetooth RGBW LED
LENS	Clear Glass	
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue	

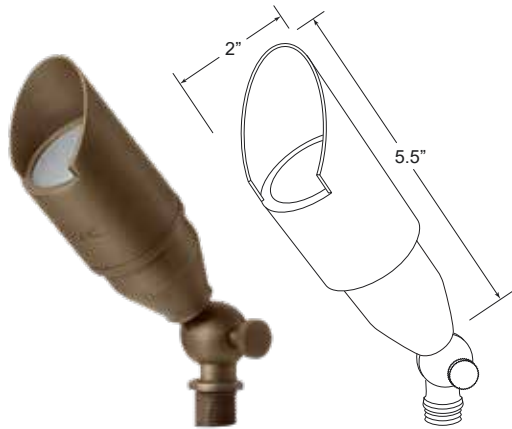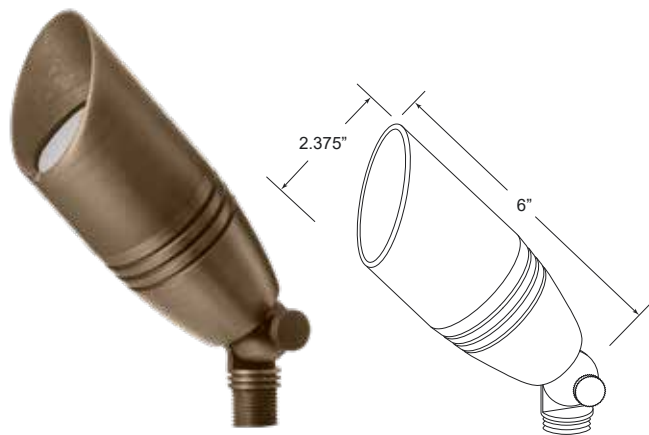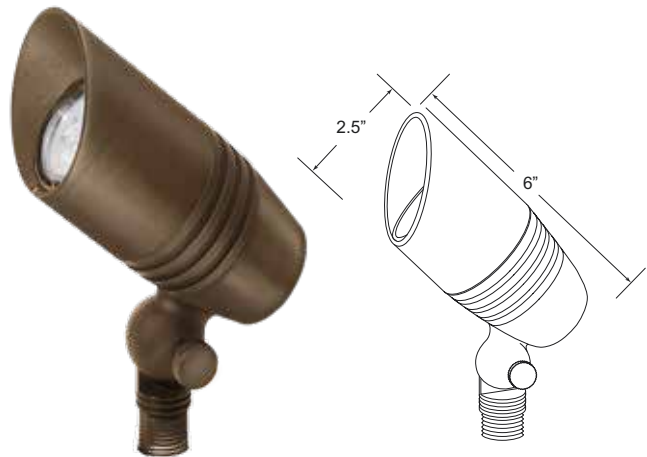**BL-20****BL-26****BL-28**

APPLICATION Up or Down Lighting of Trees, Homes and Structures

CONSTRUCTION Solid Cast Brass

FINISH Antiqued Brass

WIRE LEAD 25 Feet of 18-2 Wire

STAKE X-800 Heavy Duty Ground Stake




LED LAMP **BL-20** 4 Watt or 6 Watt LED MR16
BL-26 / BL-28 4 Watt, 6 Watt, or 9 Watt LED MR16

LED LAMP OPTIONS **BL-26 / BL-28** Bluetooth RGBW LED
 Wi-Fi RGBW LED

LENS Clear Glass

OPTIONAL LENS Frosted, Linear, Honeycomb, Moonlight Blue


UP & DOWN LIGHTING

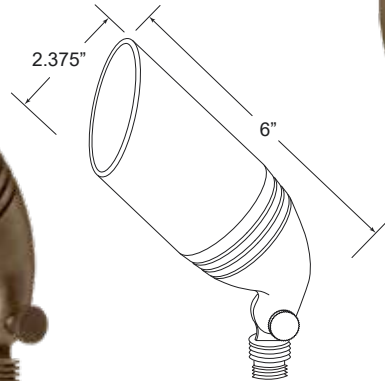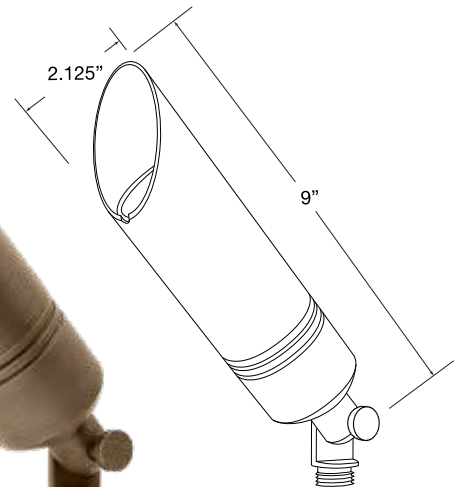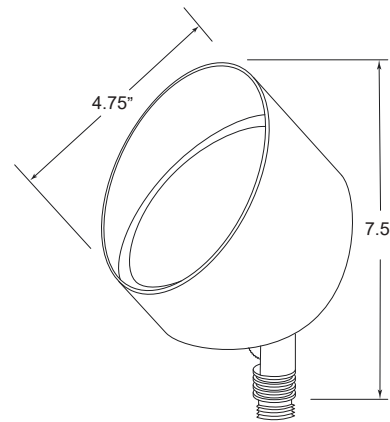**BL-27****BL-29****BL-32**


APPLICATION	Up or Down Lighting of Trees, Homes and Structures	
CONSTRUCTION	Solid Cast Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	BL-27 / BL-29	X-800 Heavy Duty Ground Stake
	BL-32	X-801 Heavy Duty Ground Stake
LED LAMP	BL-27	4 Watt or 6 Watt LED MR16
	BL-29	4 Watt, 6 Watt, or 9 Watt LED MR16
	BL-32	10 Watt LED PAR36
LED LAMP OPTIONS	BL-32	6 Watt, 13 Watt, 17 Watt LED PAR36
	BL-29 / BL-32	Bluetooth RGBW LED
LENS	Clear Glass	
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue	

UP & DOWN WALL WASHER / FLOOD LIGHTING

BRASS






BL-30

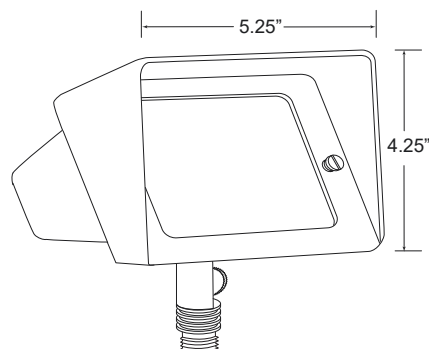


BL-31

APPLICATION	Up or Down Lighting of Walls, Signs, Buildings, Homes, Water Features and Structures	
CONSTRUCTION	Solid Cast Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	BL-30	X-800 Heavy Duty Ground Stake
	BL-31	X-801 Heavy Duty Ground Stake
LED LAMP	BL-30	3 Watt LED Panel
	BL-31	6 Watt LED Panel
LED LAMP OPTIONS	BL-31	4 Watt or 6 Watt LED MR16
	BL-30	3 Watt or 4 Watt G4 LED
	BL-31	20 Watt Super Bright LED Panel
	BL-31	Wi-Fi RGBW LED
LENS	Clear, Frosted and Linear Glass	


DECK / STEP LIGHTING

**SD-01-BR****SD-02****SD-40**


APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks	
CONSTRUCTION	Solid Brass	
FINISH	SD-01-BR	Natural Brass or Powder Coated
	SD-02	Antiqued Brass
	SD-40	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	SD-01-BR	3 Watt LED G4 Bi-Pin
	SD-02	3 Watt LED Wedge Base
	SD-40	Integrated Adjustable CCT (Kelvin) Adjustable from 2200k to 5000k with Dimming Options
LED LAMP OPTIONS	SD-01-BR	1 Watt or 2 Watt G4 Bi-Pin
	SD-02	1 Watt or 2 Watt Wedge Base

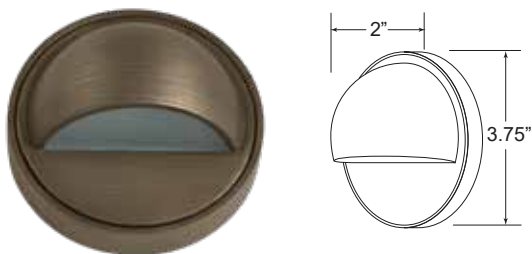

SD-46

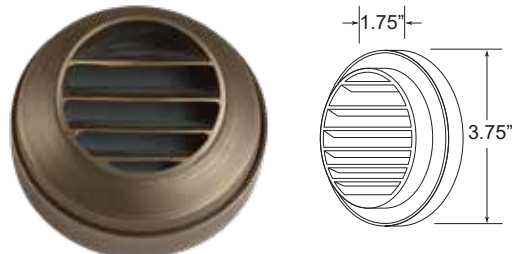







SD-47

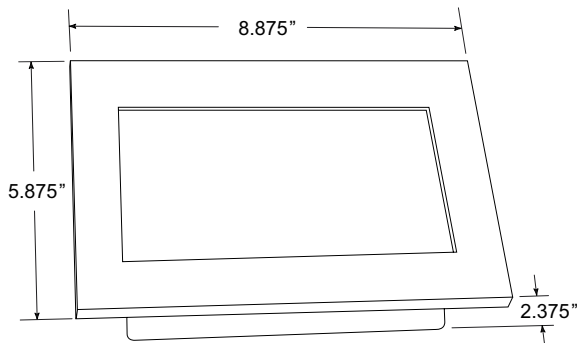

SD-60 BRICK PAVER

APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks, Brick Pavers	
CONSTRUCTION	Solid Brass	
FINISH	SD-46 / SD-47	Antiqued Brass
	SD-60	Antiqued Brass Cover, Stainless Steel Body
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	SD-46 / SD-47	2 Watt LED T3 (G4)
	SD-60	3 Watt LED Panel
LENS	Frosted Glass	
SPECIAL FEATURE	SD-60 The rectangle trim cover can be powder coated to match any color brick	



DECK / STEP LIGHTING

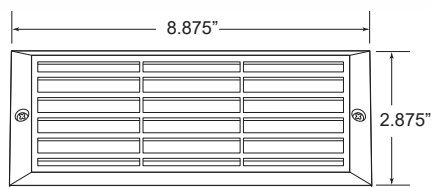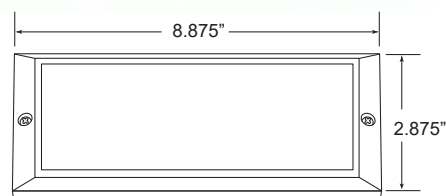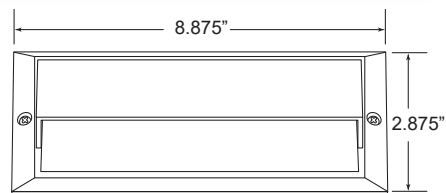**SD-400****SD-403****SD-401****SD-404****SD-402****SD-405**



APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks
CONSTRUCTION	Solid Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	2 Watt LED Panel
LENS	Frosted Lens




SD-506

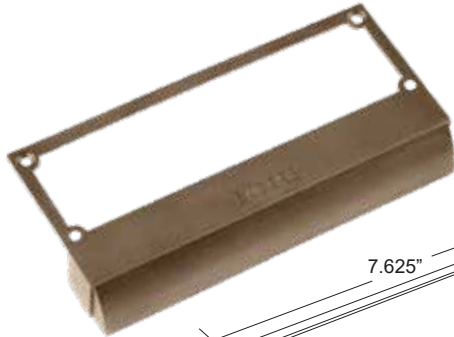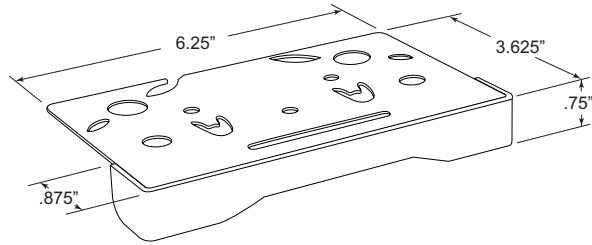


SD-500

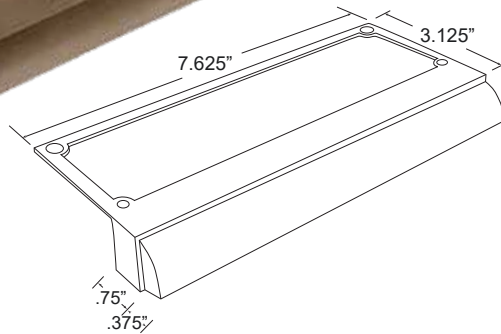

SD-501




SD-505




APPLICATION	Illuminating Retaining Walls, Seat Walls, Steps, Decks, Railings, Outdoor Kitchens	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	SD-500 / SD-505	3 Watt LED Lighting Strip
	SD-501 / SD-506	2 Watt LED Lighting Strip
LENS	Clear and Frosted Glass	
SPECIAL FEATURES	SD-506	Removable Front Plate for Easy Powdercoat Color Match


DECK / PAVER / INGROUND LIGHTING




UL-53



WL-90



WL-92

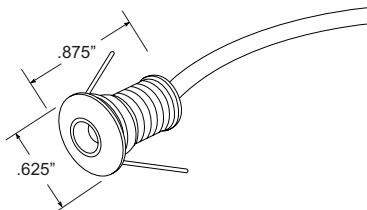

MICRO LIGHT

APPLICATION	Illuminating Walks, Pathways, Outdoor Kitchens, Soffit Lighting, Wall Lighting	
CONSTRUCTION	Stainless Steel	
FINISH	Stainless Steel	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	UL-53	3 Watt Integrated LED (Underwater Rated)
	WL-90	1 Watt Integrated LED
	WL-92	3 Watt Integrated LED
	MICRO LIGHT	1 Watt Integrated LED
OPTIONAL LAMP	Red, Green, Blue LED	
SPECIAL FEATURES	UL-53	Underwater or Inground Applications
LENS	Clear Flat Glass	



WL-91



WL-93



WL-94





WL-95



WL-96







WL-97



APPLICATION	Illuminating Walks, Pathways, Outdoor Kitchens, Soffit Lighting, Wall Lighting
CONSTRUCTION	Stainless Steel with Composite Sleeve
FINISH	Nickel
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	3 Watt Integrated LED
LENS	Clear Flat Glass

UP LIGHTING / INGROUND LIGHTING

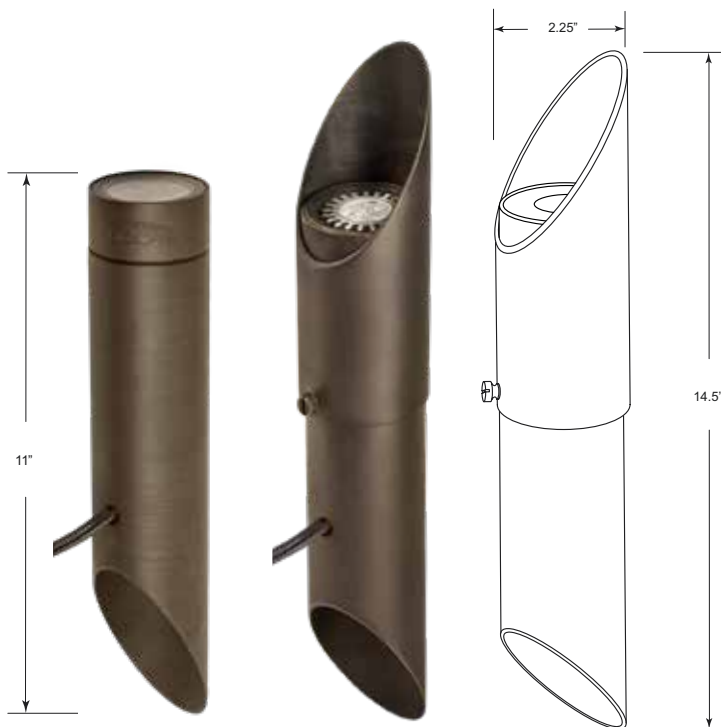**WL-80****WL-25****WL-81****WL-83**

APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars, Steps, Walkways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	WL-80 / 81 / 83 MR8 LED WL-25 6W MR16 LED
LENS	Clear Flat Glass
OPTIONAL LENS	Frosted Flat Glass
LED LAMP OPTIONS	WL-25 4 Watt, 9 Watt, and Bluetooth RGBW LED WL-80 / 81 / 83 Wi-Fi RGBW LED

INGROUND WELL LIGHTING

BRASS



WL-100




WL-101



WL-102



WL-103

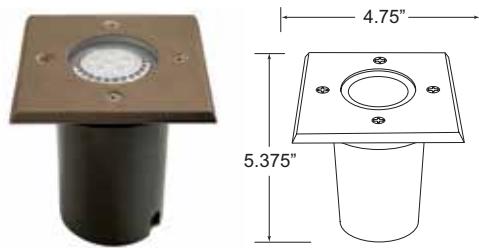

WL-105



WL-104





WL-106



WL-107

APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars, Steps, Walkways
CONSTRUCTION	Solid Cast Brass Cover and Body with Composite Sleeve
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	4, 6, or 9 Watt LED MR16
LED LAMP OPTIONS	Bluetooth RGBW LED Wi-Fi RGBW LED
LENS	Clear Flat Glass
OPTIONAL LENS	Frosted Flat Glass
OPTIONAL COVER	X-100-BRASS RING to be used as a Debris Guard when installed in Mulch or Turf
SPECIAL FEATURES	Brass Body and Cover with Composite Sleeve for Easy Installation in Concrete and Pavers. Each Fixture comes with an X-800 Stake for stable Installation

WELL LIGHTS & INGROUND LIGHTS

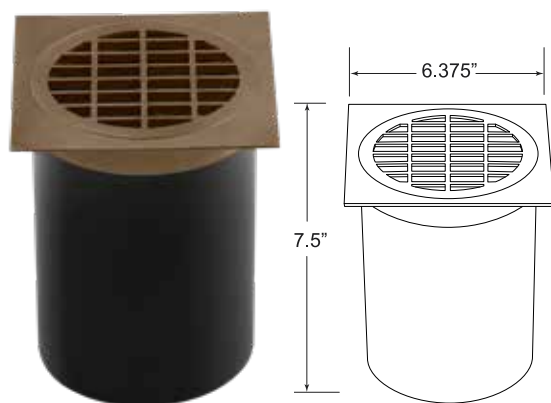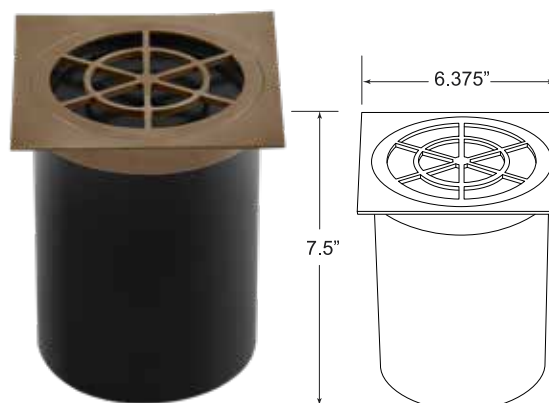**WL-113****WL-115****WL-116**


APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars	
CONSTRUCTION	Solid Cast Brass Cover with Composite Body	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	WL-115 / WL-116	6, 10, 13, or 17 Watt LED PAR36
	WL-113	4 Watt or 6 Watt LED MR16
LED LAMP OPTIONS	WL-115 / WL-116	Bluetooth RGBW LED
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	
SPECIAL FEATURES	Brass Cover with Composite Body and Adjustable Stainless Steel Gimble Ring for Up/ Down and Angled Adjustments	

WELL LIGHTS & INGROUND LIGHTS

BRASS




WL-235-BK / WL-235-LB

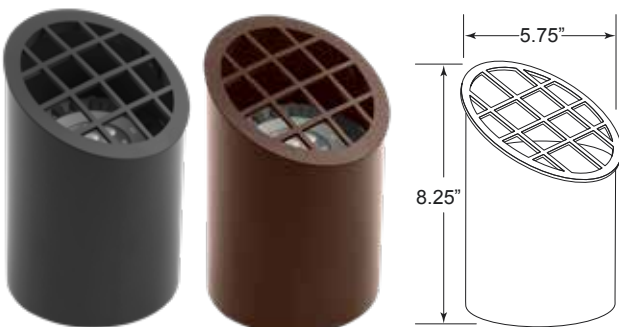

WL-335-BK / WL-335-LB




WL-435-BK / WL-435-LB

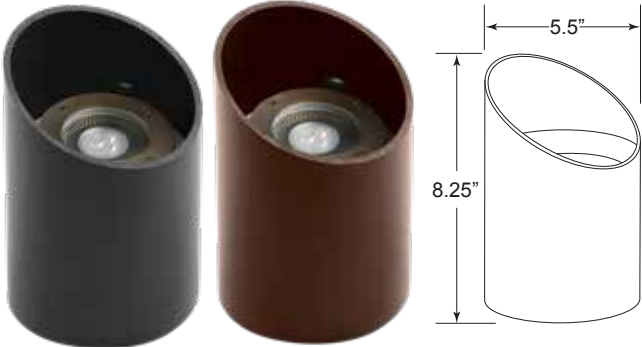


WL-535-BK / WL-535-LB

APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars
CONSTRUCTION	Composite Body with Stainless Steel Adjustable Gimble Ring
	WL-435 Solid Cast Brass Cover with Glass Composite Body with Stainless Steel Adjustable Gimble Ring
FINISH	Black or Brown
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	WL-235 / WL-335 / WL-435 6, 10, 13, or 17 Watt LED PAR36 WL-535 4, 6, or 9 Watt LED MR16
LED LAMP OPTIONS	Bluetooth RGBW LED
OPTIONAL LENS	Clear or Frosted Glass Lens

UNDERWATER LIGHTING

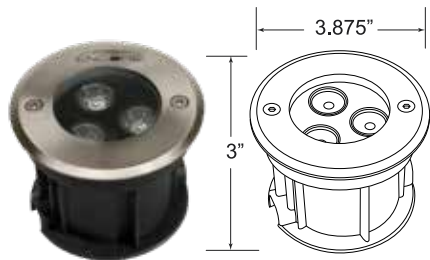

UL-54-3W

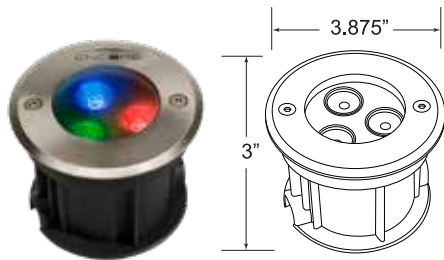

UL-54-3W-RGB



UL-54-6W



UL-54-6W-RGB




UL-54-9W




UL-54-9W-RGB


APPLICATION	Underwater and Inground Up Lighting
CONSTRUCTION	Stainless Steel Fixture with Composite Body Sleeve
FINISH	Stainless Steel
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	Integrated LED 3 Watt, 6 Watt or 9 Watt Warm White or RGB with DMX Controller for Many Color Options and Color Changing Modes
LENS	Clear Flat Glass

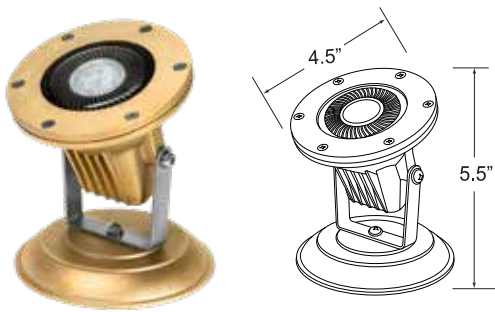


UL-55

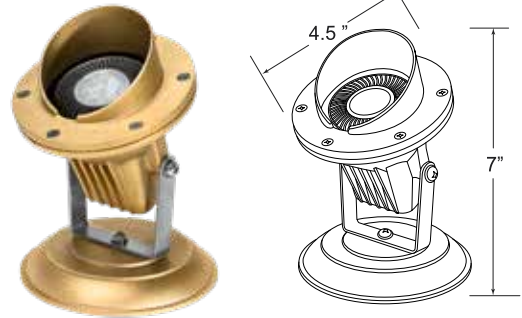


UL-56

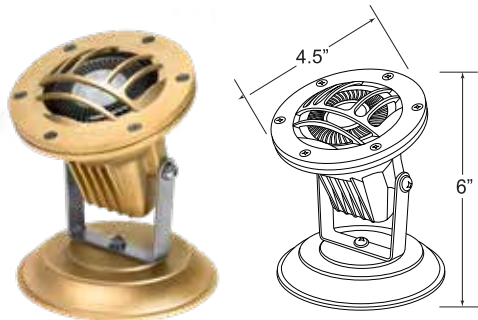

UL-57

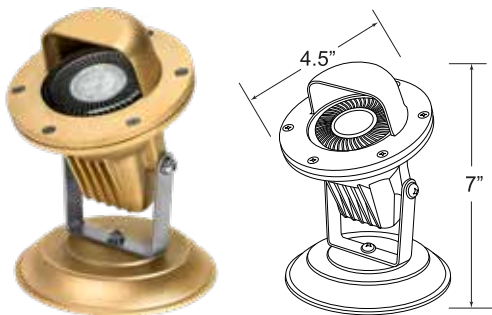

UL-58

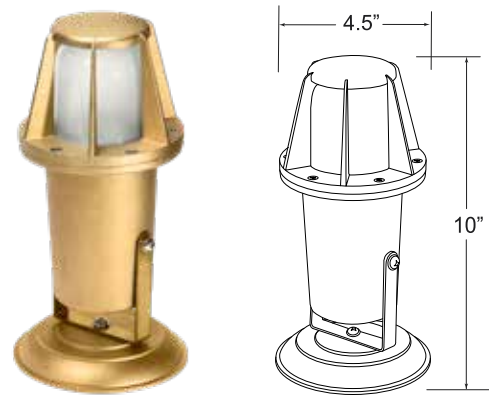


UL-59

APPLICATION	Underwater and Up Lighting
CONSTRUCTION	Solid Cast Brass
FINISH	Natural Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	4 Watt or 6 Watt LED MR16
LENS	Clear Flat Glass


HANGING LIGHTS




HL-200




HL-201



HL-202



HL-203



APPLICATION	Illuminating Decks, Porches, Outdoor Kitchens, Sun Rooms, Gazebos, Patios	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	HL-200 / HL-202 / HL-203	3 Watt LED G4 Bi-Pin
	HL-201	Medium Base A19 12 Volt or 120 Volt LED
LED LAMP OPTIONS	HL-200 / HL-202 / HL-203	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 4 Watt or 6 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
	HL-201	Bluetooth RGBW LED WiFi RGBW LED



HL-02-SP



HL-02-B-SP



HL-01-B-SP



HL-12-SP



HL-15-SP



HL-02-B



HL-06



HL-12






HL-14




HL-60

APPLICATION	Illuminating Decks, Porches, Outdoor Kitchens, Sun Rooms, Gazebos, Patios
CONSTRUCTION	Solid Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome


WALL SCONCES

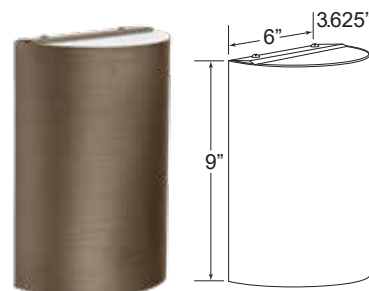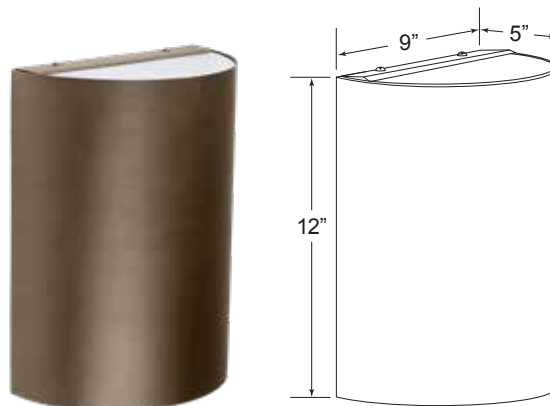**WS-01****WS-02****WS-03**


APPLICATION	Illuminating Front Entrance Ways, Porches, Decks, Walls, Garages	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	WS-01 / WS-02	(2) 3 Watt LED Bi-Pin
	WS-03	(2) Medium Base A-19 LED (12v or 120v)
LED LAMP OPTIONS	WS-01 / WS-02	Wi-Fi RGBW G4 LED
	WS-03	Bluetooth RGBW LED
		Wi-Fi RGBW LED

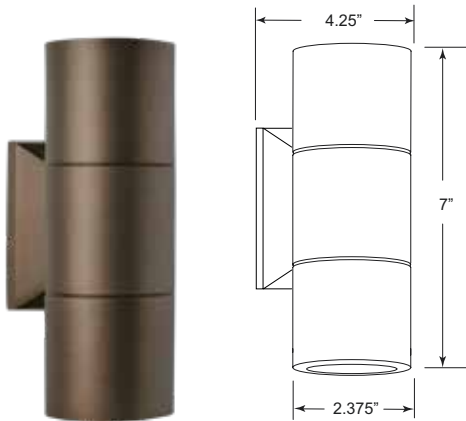


WS-04

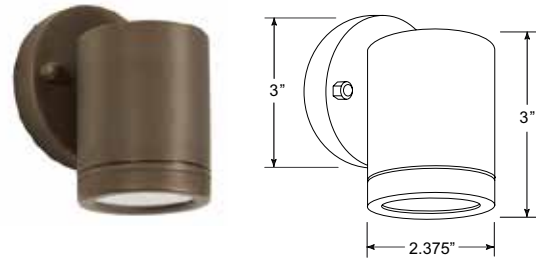

WS-05

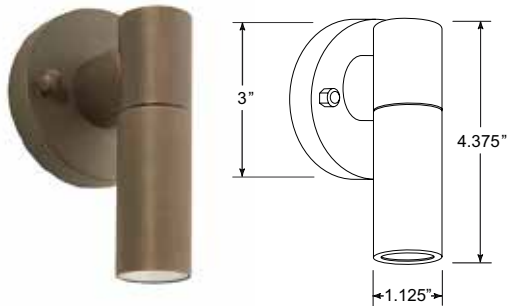

WS-06

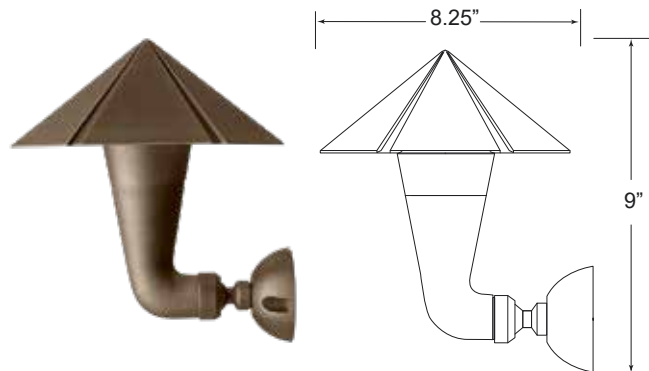


WS-100*

* ANY SHADE CAN BE USED WITH THIS FIXTURE
(SHOWN WITH BL-19 SHADE)


APPLICATION	Illuminating Front Entrance Ways, Porches, Decks, Walls, Garages	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	WS-04	(2) 4 Watt or 6 Watt LED MR16
	WS-05	4 Watt LED MR16
	WS-06	3 Watt LED Integrated
	WS-100	4 Watt LED MR16
LED LAMP OPTIONS	WS-04	Wi-Fi RGBW LED
	WS-05	Wi-Fi RGBW LED
SPECIAL FEATURES	WS-100	Available with Most Shades. Please Specify the Shade when Ordering (The Picture Above is Shown with the BL-19 Shade)

ACCESSORIES

RISER EXTENSIONS

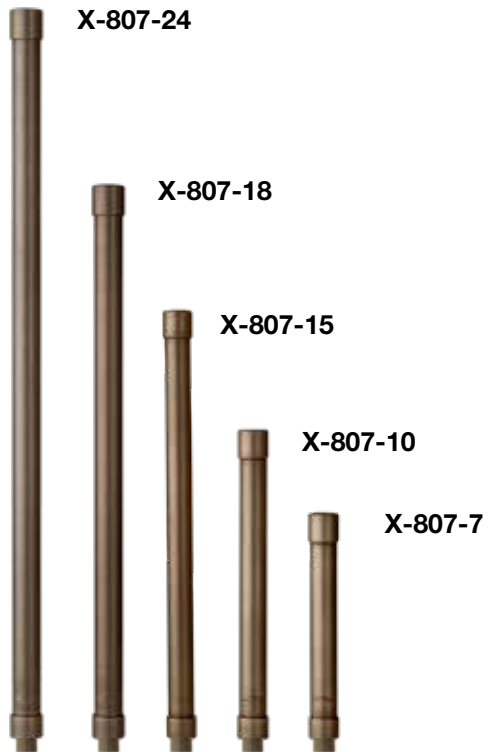

ADJUSTABLE RISER EXTENSIONS

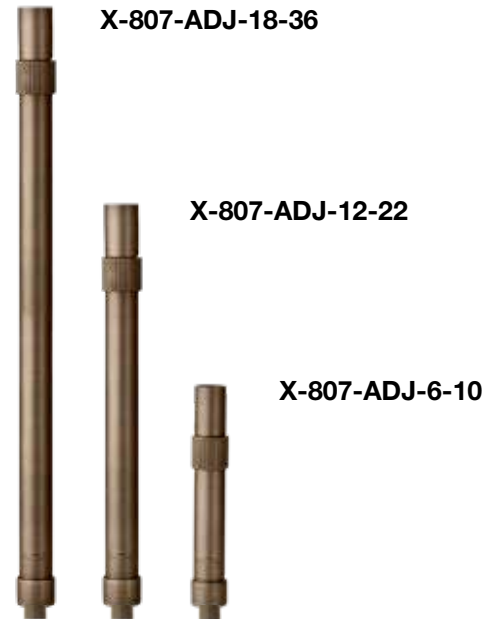


ELBOWED POST



TEE POST



PERFECT POST ASSEMBLY

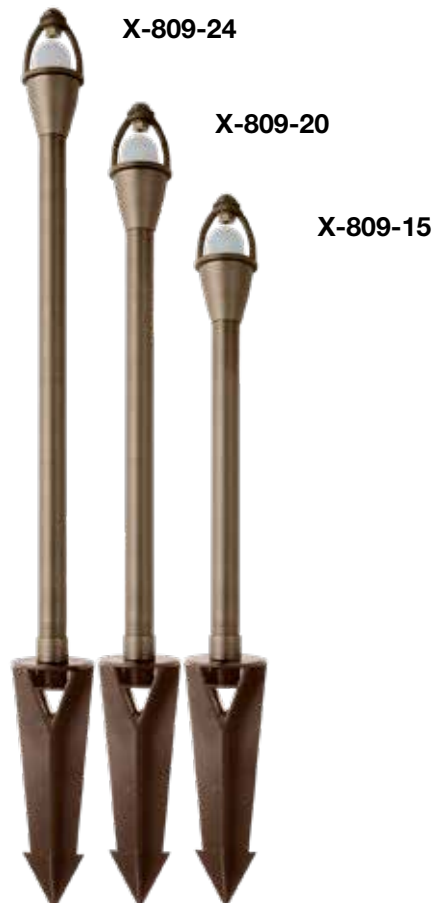

STAKES



X-800



X-801



X-802



X-805



X-806

WALL MOUNT



X-813-AB

TREE MOUNT



X-815

GUTTER MOUNT



X-818

WIRE NUTS



VOLTAGE BALANCER



X-900

ACCESSORIES



X-811



X-820



X-821



X-825



X-826



X-100-BRASS RING



X-300-BRASS COVER-BK



X-300-BRASS COVER-LB



X-300-GRATE-BK



X-300-GRATE-LB



GIMBLE RING



ARCH



CONE



X-BRASS TEE



X-BRASS ELBOW



X-816



**X-BRASS
COUPLER-SMALL**



**X-BRASS
COUPLER**



**X-BRASS
COUPLER-XL**



X-BRASS NIPPLE



**X-BRASS
NIPPLE-LONG**



**X-BRASS
NIPPLE-EXTENDER**



X-SOCKET-G6.35



**X-BRASS
SOCKET POST**







**X-BRASS
KNOB**



**X-BRASS
FINIAL**

PATH & AREA LIGHTING

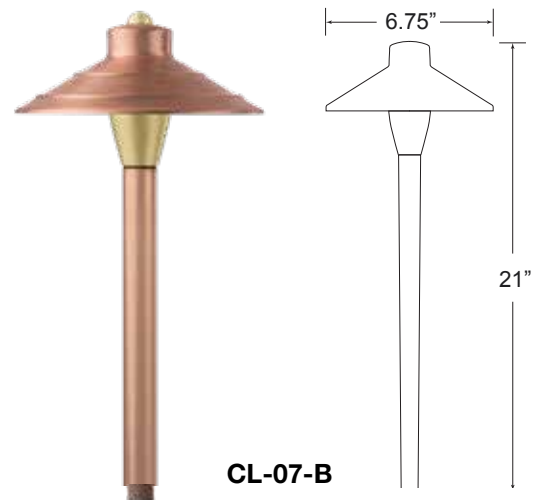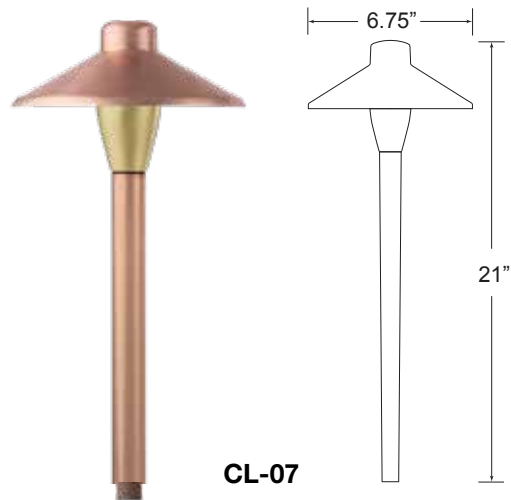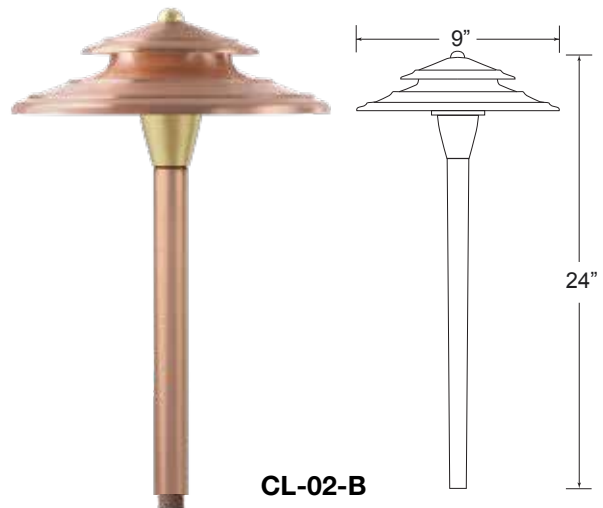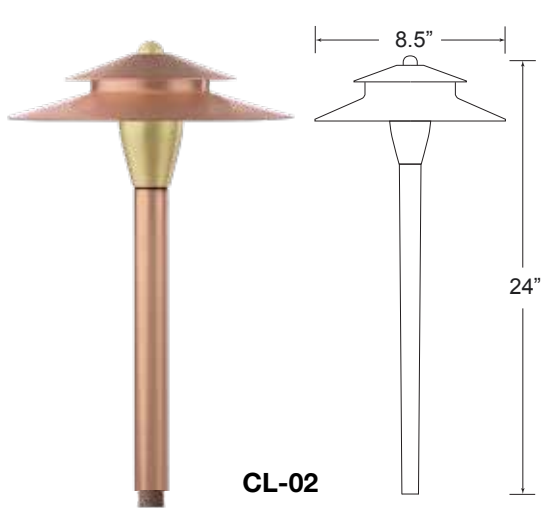

APPLICATION Illuminating Pathways, Bed Areas and Driveways

CONSTRUCTION Copper Shade with Solid Copper Post

FINISH Copper

WIRE LEAD 25 Feet of 18-2 Wire


STAKE X-801 Heavy Duty Ground Stake

LED LAMP 3 Watt LED G4 Bi-Pin

LED LAMP OPTIONS 1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin
Wi-Fi RGBW LED




LENS Clear and Frosted Glass Dome

HEIGHT	CL-02 / CL-02-B	24"	Light Spread: 10-12'
	CL-07 / CL-07-B	21"	Light Spread: 8-10'

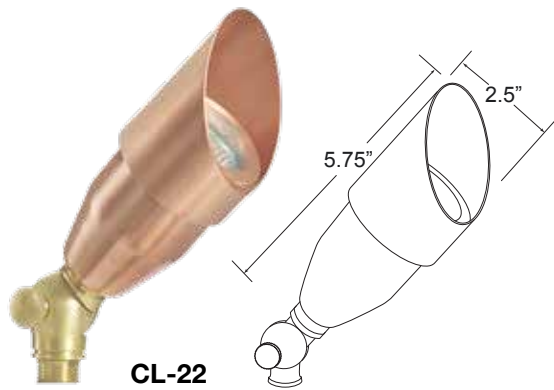

APPLICATION	CL-05	Illuminating Pathways, Bed Areas and Driveways
	CL-22	Up Lighting of Trees, Walls, Homes
CONSTRUCTION	Heavy Copper and Brass	
FINISH	Copper	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	CL-05	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	CL-05	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin
		Wi-Fi RGBW LED
LENS	CL-05	Clear and Frosted Glass Dome
	CL-22	Clear Convex Lens
HEIGHT	CL-05 21"	Light Spread: 8-10'

PATH & AREA LIGHTING

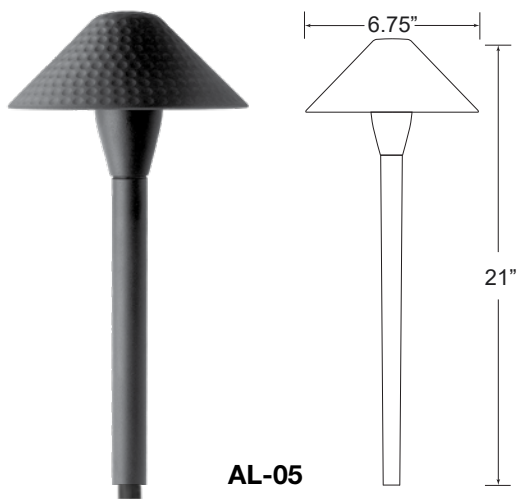
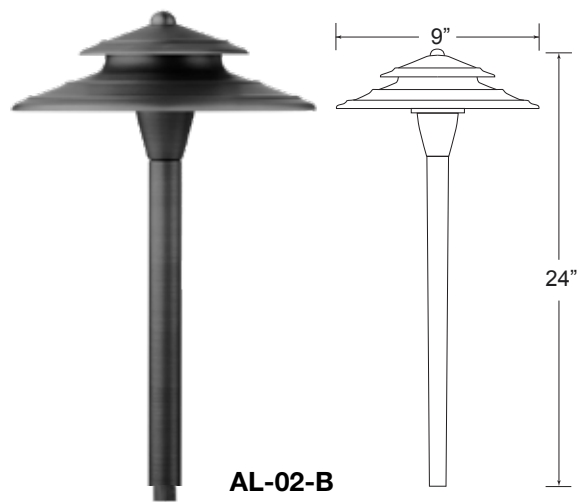
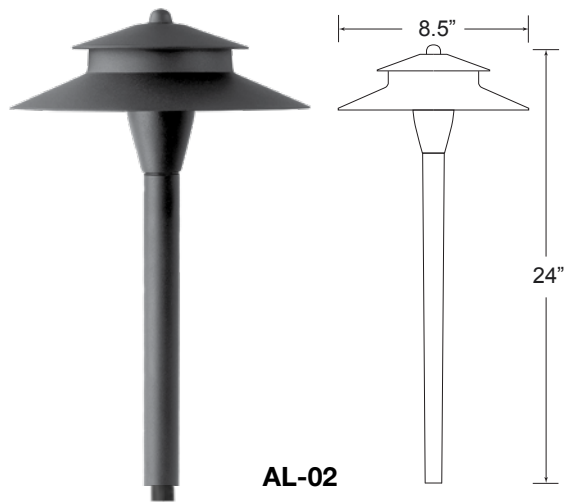


APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Die Cast Aluminum Shade and Post		
FINISH	Textured Back		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	AL-02 / AL-02-B	24"	Light Spread: 10-12'
	AL-05	21"	Light Spread: 8-10'
	AL-06	21"	Light Spread: 8-10'






APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Die Cast Aluminum Shade and Post AL-09 Glass Shade		
FINISH	Textured Back		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	AL-07 / AL-07-B	21"	Light Spread: 8-10'
	AL-09	24"	Light Spread: 10-12'

PATH & AREA LIGHTING

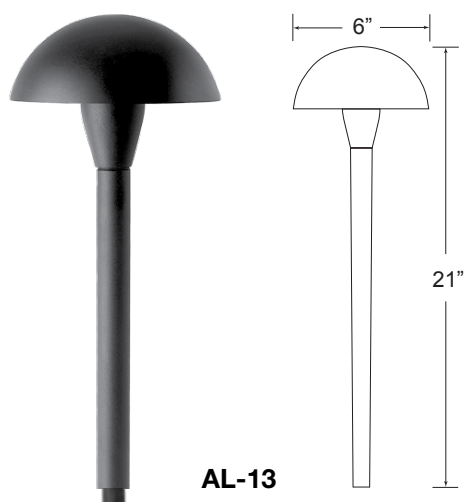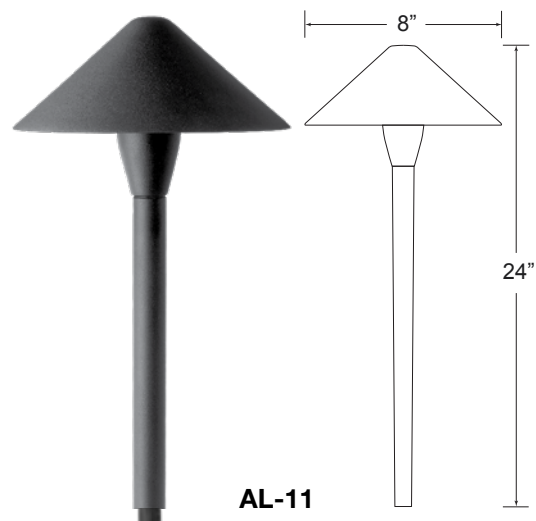
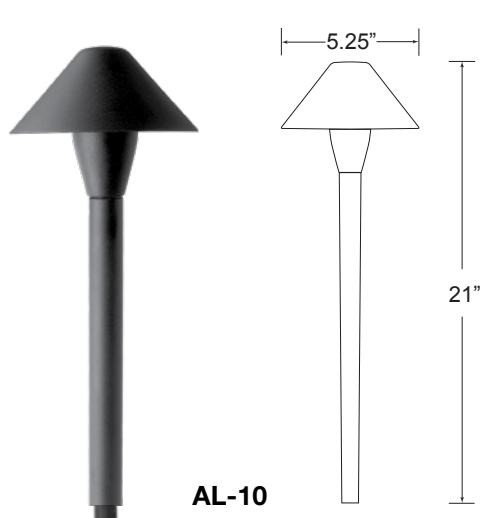


APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Die Cast Aluminum Shade and Post		
FINISH	Textured Back		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	AL-10 / AL-13	21"	Light Spread: 6-8'
	AL-11 / AL-14	24"	Light Spread: 8-10'

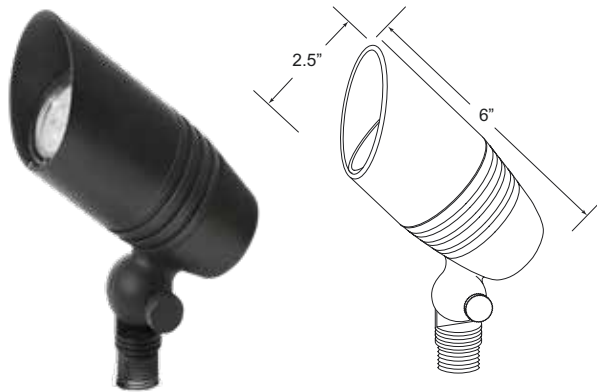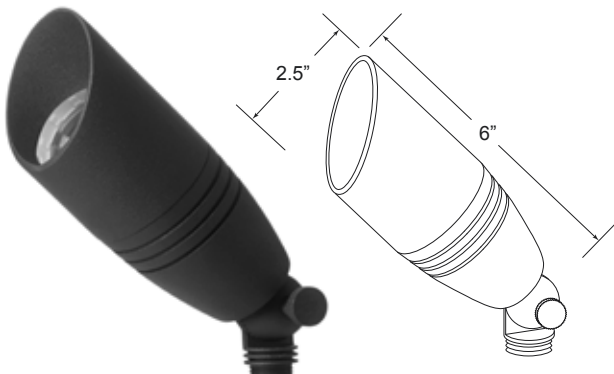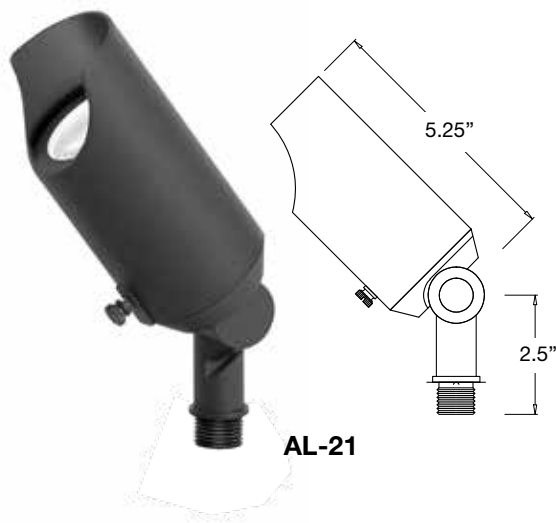


APPLICATION	Up or Down Lighting of Trees, Homes and Structures	
CONSTRUCTION	Die Cast Aluminum	
FINISH	Textured Black	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-800 Heavy Duty Ground Stake	
LED LAMP	AL-21	4 Watt or 6 Watt LED MR16
	AL-26 / AL-28	4 Watt, 6 Watt, or 9 Watt LED MR16
LED LAMP OPTIONS	AL-26 / AL-28	Bluetooth RGBW LED
LENS	Clear Glass	
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue	

UP & DOWN WALL WASHER / FLOOD LIGHTING

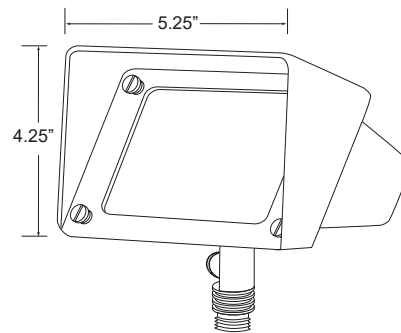**AL-30****AL-31**

APPLICATION	Up or Down Lighting of Walls, Signs, Buildings, Homes, Water Features and Structures	
CONSTRUCTION	Die Cast Aluminum	
FINISH	Textured Black	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	AL-30	X-800 Heavy Duty Ground Stake
	AL-31	X-801 Heavy Duty Ground Stake
LED LAMP	AL-30	3 Watt LED Panel
	AL-31	6 Watt LED Panel
LED LAMP OPTIONS	AL-31	4 Watt or 6 Watt LED MR16
	AL-30	3 Watt or 4 Watt G4 LED
	AL-31	20 Watt Super Bright LED Panel
	AL-31	Wi-Fi RGBW LED
LENS	Clear, Frosted and Linear Glass	


Optional Finishes



Black Texture



Brown Metallic



White Gloss



Bronze Taupe



Dark Copper Satin



Rust



Light Gray



Dark Gray




Dark Bronze Sparkle



Dark Rust



Stainless



Desert Stone



Bronze Blast




Copper Metallic



Chrome



Antique Green



Decorative Bronze



Bronze Metallic



Nickel



Weathered Green

- Custom color matching is available
- Additional RAL colors are available using the standard RAL color system
- Actual finishes may differ slightly than as shown above
- Choosing any color other than the standard finish will result in an up-charge per fixture

TRANSFORMERS



TR-75SS-15



TR-150SS-15



TR-300SS-15



TR-300SS-22



TR-600SS-15



TR-600SS-22

Multi-Tap Transformers (WiFi Compatible)

Construction:	304 Stainless Steel
Taps:	12-15 Volt Transformers are 12, 13, 14, & 15
Taps:	12-22 Volt Transformers are 12, 13, 14, 15, 16, 17, 18, 20, & 22
Primary Protection:	Automatic thermal reset breaker
Secondary Protection:	25 amp, 300 watt magnetic breaker with reset switch
Torodial Core:	Epoxy sealed core which is silent and up to 10% more efficient, runs much cooler than laminated cores
Terminal:	Extra large 125 amp terminal blocks, holds (8) 12/2 wire
Internal Wiring:	Non-corrosive, tin coated marine grade, dedicated current loop to measure primary amperage.
Timer Receptacle:	Standard receptacle for plug and play options
Photo Cell Plug:	Dedicated plug for easy installation of photo cell
Child Proof Safety:	Lockable latched door to prevent access

Model	Volts	Wattage	Max Amps	Dimensions	Weight
TR-75SS-15	12, 15	75 watts	.625 amps	6 ½" L x 3 ¾" W x 4 ¼" D	8 lbs
TR-150SS-15	12, 13, 14, 15	150 watts	1.25 amps	10 ½" L x 5 ¾" W x 4 ½" D	13 lbs
TR-300SS-15	12, 13, 14, 15	300 watts	2.5 amps	16 ¼" L x 6" W x 5 ½" D	24 lbs
TR-600SS-15	12, 13, 14, 15	600 watts	5.0 amps	16 ¼" L x 6" W x 5 ½" D	30 lbs
TR-300SS-22	12, 13, 14, 15, 16, 17, 18, 22	300 watts	2.5 amps	16 ¼" L x 6" W x 5 ½" D	26 lbs
TR-600SS-22	12, 13, 14, 15, 16, 17, 18, 22	600 watts	5.0 amps	16 ¼" L x 6" W x 5 ½" D	32 lbs
TR-900SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	900 watts	7.5 amps	17 ¼" L x 7 ¾" W x 7" D	48 lbs
TR-1200SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	1200 watts	10 amps	17 ¼" L x 7 ¾" W x 7" D	51 lbs

TRANSFORMER ACCESSORIES



X-TM



X-TM-DM



X-PC-25



X-PC



X-TM-ASTRO






X-WIFI SMART PLUG



X-DIMMER

LAMP GUIDE

Lamp Type	Part Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
LED MR8 	LA-LED-MR8-3W-2700	3	12	80°	G4 Bi-Pin	120	2700	40,000
	LA-LED-MR8-3W-3000	3	12	80°	G4 Bi-Pin	120	3000	40,000
LED MR11 	LA-LED-MR11-3W-2700	3	12	40°	G4 Bi-Pin	180	2700	40,000
	LA-LED-MR11-3W-3000	3	12	40°	G4 Bi-Pin	180	3000	40,000
LED MR16 	LA-LED-MR16-4W-2700-15	4	12	15°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-30	4	12	30°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-45	4	12	45°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-60	4	12	60°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-100	4	12	100°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-3000-15	4	12	15°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-30	4	12	30°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-45	4	12	45°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-60	4	12	60°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-100	4	12	100°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-5000-45	4	12	45°	GU5.3 Bi-Pin	320	5000	40,000
	LA-LED-MR16-4W-5000-60	4	12	60°	GU5.3 Bi-Pin	320	5000	40,000
	LA-LED-MR16-5W-2700-100	5	12	100°	GU5.3 Bi-Pin	340	2700	40,000
	LA-LED-MR16-5W-3000-100	5	12	100°	GU5.3 Bi-Pin	360	3000	40,000
	LA-LED-MR16-6W-2700-15	6	12	15°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-2700-30	6	12	30°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-2700-45	6	12	45°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-2700-60	6	12	60°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-3000-15	6	12	15°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-30	6	12	30°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-45	6	12	45°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-60	6	12	60°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-5000-45	6	12	45°	GU5.3 Bi-Pin	510	5000	40,000
	LA-LED-MR16-6W-5000-60	6	12	60°	GU5.3 Bi-Pin	510	5000	40,000
	LA-LED-MR16-9W-2700-30	9	12	30°	GU5.3 Bi-Pin	560	2700	40,000
	LA-LED-MR16-9W-2700-45	9	12	45°	GU5.3 Bi-Pin	560	2700	40,000
	LA-LED-MR16-9W-2700-60	9	12	60°	GU5.3 Bi-Pin	560	2700	40,000
	LA-LED-MR16-9W-3000-30	9	12	30°	GU5.3 Bi-Pin	580	3000	40,000
	LA-LED-MR16-9W-3000-45	9	12	45°	GU5.3 Bi-Pin	580	3000	40,000
	LA-LED-MR16-9W-3000-60	9	12	60°	GU5.3 Bi-Pin	580	3000	40,000
Bluetooth	LA-LED-MR16-10W-RGBW-45	10	12	45°	GU5.3 Bi-Pin	Varies	RGBW	40,000



MR-8-3W



MR-11-3W



MR-16-4W



MR-16-6W




MR-16-9W



PAR-36



MR-16-RGBW-BT

Lamp Type	Part Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
LED PAR 36 	LA-LED-PAR36-6W-2700-40	6	12	40°	Screw Terminal	460	2700	40,000
	LA-LED-PAR36-6W-3000-40	6	12	40°	Screw Terminal	480	3000	40,000
	LA-LED-PAR36-6W-2700-60	6	12	60°	Screw Terminal	460	2700	40,000
	LA-LED-PAR36-6W-3000-60	6	12	60°	Screw Terminal	480	3000	40,000
	LA-LED-PAR36-10W-2700-40	10	12	40°	Screw Terminal	600	2700	40,000
	LA-LED-PAR36-10W-3000-40	10	12	40°	Screw Terminal	620	3000	40,000
	LA-LED-PAR36-10W-2700-60	10	12	60°	Screw Terminal	600	2700	40,000
	LA-LED-PAR36-10W-3000-60	10	12	60°	Screw Terminal	620	3000	40,000
	LA-LED-PAR36-13W-2700-40	13	12	40°	Screw Terminal	800	2700	40,000
	LA-LED-PAR36-13W-3000-40	13	12	40°	Screw Terminal	820	3000	40,000
	LA-LED-PAR36-13W-2700-60	13	12	60°	Screw Terminal	800	2700	40,000
	LA-LED-PAR36-13W-3000-60	13	12	60°	Screw Terminal	820	3000	40,000
	LA-LED-PAR36-17W-2700-40	17	12	40°	Screw Terminal	930	2700	40,000
	LA-LED-PAR36-17W-3000-40	17	12	40°	Screw Terminal	960	3000	40,000
	LA-LED-PAR36-17W-2700-60	17	12	60°	Screw Terminal	930	2700	40,000
	LA-LED-PAR36-17W-3000-60	17	12	60°	Screw Terminal	960	3000	40,000
Bluetooth	LA-LED-PAR36-10W-RGBW-40	10	12	40°	Screw Terminal	Varies	RGBW	40,000

LAMP GUIDE



T3-1W



T3-3W



T3-4W



G4 COB



T4-2W





T4-3W



BA-15-D



BA-15-S

Lamp Type	Part Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
LED T3 	LA-LED-T3-25-1W-3000	1	12	–	G4 Bi-Pin	90	3000	40,000
	LA-LED-T3-13-2W-3000	2	12	–	G4 Bi-Pin	180	3000	40,000
	LA-LED-T3-18-3W-3000	3	12	–	G4 Bi-Pin	240	3000	40,000
	LA-LED-T3-27-4W-3000	4	12	–	G4 Bi-Pin	360	3000	40,000
	LA-LED-T4-48-2W-3000	2	12	–	G4 Bi-Pin	190	3000	40,000
	LA-LED-T4-72-3W-3000	3	12	–	G4 Bi-Pin	250	3000	40,000
	LA-LED-COB-3W-2700	3	12	–	G4 Bi-Pin	240	2700	40,000
	LA-LED-COB-3W-3000	3	12	–	G4 Bi-Pin	260	3000	40,000
LED BA-15 	LA-LED-BA-15S-3W-3000	3	12	–	Single Bayonet	240	3000	40,000
	LA-LED-BA-15D-3W-3000	3	12	–	Double Bayonet	240	3000	40,000



A19



A19 CLEAR



CANDELABRA



LED-BL-30



LED-BL-31



LED-BL-31-20W



LED-SD-500



LED-SD-501



LED-SD-505



LED-SD-506

<i>Lamp Type</i>	<i>Part Number</i>	<i>Watts</i>	<i>Volts</i>	<i>Beam Spread</i>	<i>Base</i>	<i>Lumens/ CBCP</i>	<i>Color Temp</i>	<i>Rated Life (Hours)</i>
LED A-19	LA-LED-CA-2W-2700-12V	2	12	–	Candelabra	210	2700	40,000
	LA-LED-A19-4W-2700-12V	4	12	–	Medium Base	300	2700	40,000
	LA-LED-A19-6.5W-2700-12V	6.5	12	–	Medium Base	360	2700	40,000
	LA-LED-A19-6.5W-3000-12V	6.5	12	–	Medium Base	380	3000	40,000
	LA-LED-A19-6.5W-2700-120V	6.5	120	–	Medium Base	380	2700	40,000
LED BL-30	LA-LED-SD-500-3W-3000	3	12	–	Crimp	220	3000	40,000
	LA-LED-SD-501-2W-3000	2	12	–	Crimp	160	3000	40,000
	LA-LED-SD-505-3W-3000	3	12	–	Crimp	240	3000	40,000
	LA-LED-SD-506-1W-2700	1	12	–	Crimp	160	2700	40,000
	LA-LED-SD-506-1W-3000	1	12	–	Crimp	180	3000	40,000
LED SD-506	LA-LED-SD-506-2W-2700	2	12	–	Crimp	220	2700	40,000
	LA-LED-SD-506-2W-3000	2	12	–	Crimp	240	3000	40,000

LAMP GUIDE



LED-G4-BRASS



LED-G4-WIFI-RGBW



LED-SD-400



LED-SD-403



LED-SD-60




LED-MODULE-PATHLIGHT



X-REPEATER-BT

<i>Lamp Type</i>	<i>Part Number</i>	<i>Watts</i>	<i>Volts</i>	<i>Beam Spread</i>	<i>Base</i>	<i>Lumens/ CBCP</i>	<i>Color Temp</i>	<i>Rated Life (Hours)</i>
LED G4	LA-LED-G4-BRASS	4	12	–	Bi-Pin	360	3000	40,000
LED BL-31	LA-LED-G4-WIFI-RGBW	3	12	–	Bi-Pin	Varies	RGBW	40,000
LED SD-400	LA-LED-SD-400-2W-3000	2	12	–	Crimp	180	3000	40,000
LED SD-403	LA-LED-SD-403-3W-3000	3	12	–	Crimp	220	3000	40,000
LED SD-60	LA-LED-SD-60-3W-3000	3	12	–	Crimp	240	3000	40,000
MODULE	LA-LED-PATHLIGHT-MODULE	4	12	–	Crimp	220	3000	40,000
REPEATER	X-REPEATER-BT	Bluetooth Signal Booster						

KELVIN CHART

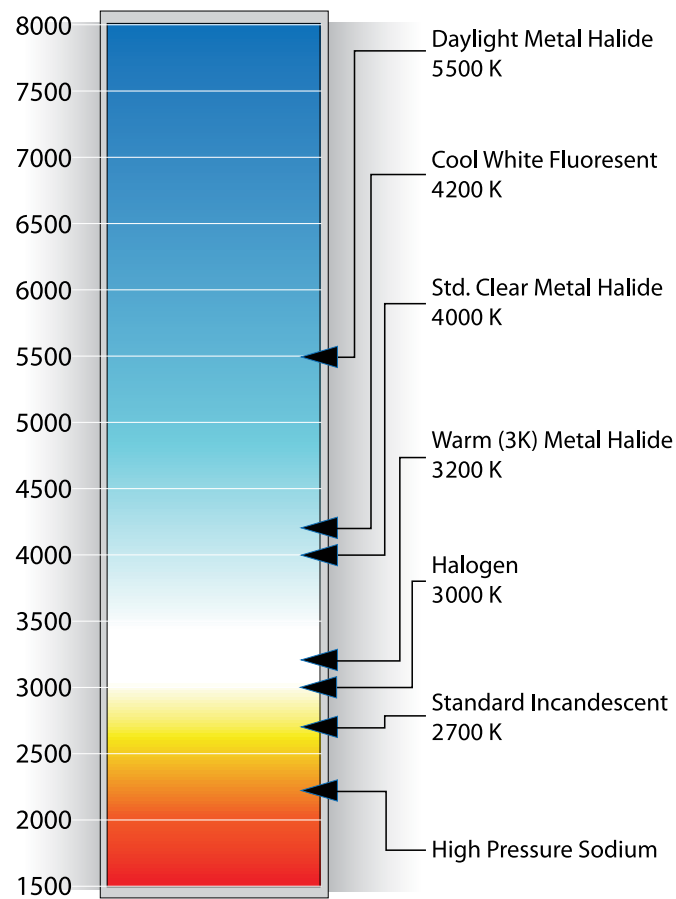



Encore Landscape Lighting warrants to the owner, each new lighting product against defects in material and workmanship for a period described below. During the warranty period, Encore Landscape Lighting will repair or replace, at our discretion, any part found to be defective. Your remedy is limited solely to the replacement or repair of defective parts.

This warranty does not apply to products, including lamps, not manufactured by Encore Landscape Lighting when used in conjunction with Encore Landscape Lighting products; or where equipment is used, or installation is performed in any manner contrary to Encore Landscape Lighting's specifications or instructions, nor where equipment is altered or modified. Encore Landscape Lighting assumes no responsibility for the improper installation of its products.

Encore Landscape Lighting is not liable for indirect, incidental or consequential damages in connection with the use of equipment, including but not limited to: vegetation loss, the cost of substitute equipment or services required during malfunction, property damage or personal injury resulting from installers actions, whether negligent or otherwise.

All implied warranties, including those of merchantability and fitness of use, are limited to the duration of this express warranty. All transformers, ABS well lights, brass and copper fixtures are covered by this warranty for the life of the original installation. All aluminum Encore Landscape Lighting fixtures are covered by this warranty for a period of three years from the date of installation. The warranty does not extend to color fading by UV rays or exposure to harsh chemicals or harsh environments including salt water environments. This warranty is non-transferable. Underwater fixtures have a warranty of one year. This warranty does not include the replacement of any lamps with the expectation of the LED lamps as listed below.

LED lamps have a warranty of three years from the date of purchase. The LED lamps must be installed at the correct voltage. Any LED lamp that is installed at an excessive voltage will void the warranty. The LED Lamps must be installed in conjunction with an Encore Landscape Lighting transformer or an approved transformer by Encore Landscape Lighting. The transformer must be a magnetic type. The use of Encore Landscape Lighting's LED lamps without a magnetic type of transformer or at voltages higher than the preferred specs will void the warranty.

In order to have a valid warranty, a registration form must be completed and submitted back to Encore Landscape Lighting within 30 days of purchase. The warranty registration form can be found on our website at www.encorelandscapelighting.com. The warranty form must be fully completed.

A product is covered during the warranty period if it is returned to Encore Landscape Lighting, freight prepaid. Our factory will inspect the product to determine if it is defective under the terms of the warranty. All products must have an RGA form (return goods authorization) completed by the customer and sent to Encore Landscape Lighting for approval. Once approved, a RGA number will be issued. No returns will be accepted without the RGA number. Encore Landscape Lighting does not compensate for any labor, diagnosis, repair, replacement, shipping fees or transportation.