The Encore Landscape Lighting System™ combined with Encore's superior products will create beauty, safety, and security all in a simple-to-install system. The Encore Landscape Lighting System allows for easy installation of fixtures and transformers while delivering balanced voltage to each fixture, creating a consistent lighting portrait to every project.

The Encore Perfect Post Path System™ offers the flexibility of interchanging the shades on each path light without replacing the entire fixture allowing for cost effective seasonal design changes.

TABLE OF CONTENTS

Brass Products

Path and Area Lighting 2-11, 13-15, 20
Bollards 16-19, 22-27
Up and Down Lighting 12, 28-31
Tiki Torch 21
Deck and Step Lighting 32-34
Hardscape and Under The Cap Lighting 35
Inground and Soffit Lighting 36-37
Underwater Lighting 36, 42-43
Well Lights and Inground Lighting 38-41
Hanging Lights 44-45
Wall Sconces 46-47
Accessories 48-51

Copper Products

Path and Area Lighting 52
Up Lighting 53

Aluminum Products

Path and Area Lighting 19, 54-56
Up and Down Lighting 57-58

Support Equipment and Information

Powder Coat Finishes 59
Transformers and Accessories 60-61
Lamp Guide 62-66
Kelvin Chart 67
Warranty 68

Note: All products in this catalog are 12 volt unless noted.

DARE TO COMPARE

- Our exceptional quality and innovative product line uses the finest materials available, including solid brass, copper, stainless steel, and a superior grade of cast aluminum.
- Our innovative fixtures are user friendly and can be adjusted without the use of tools.
- Our lifetime warranty and unsurpassed service is second to none.
- Our state of the art factory and shipping department allow for orders to be processed and shipped the same day.

Encore Landscape Lighting Products are the choice by professionals who require reliable products of superior quality that will last a lifetime.

ENCORE
Landscape Lighting


www.EncoreLandscapeLighting.com

Encore Landscape Lighting
2277 Elliott Drive
Troy, MI 48083


Phone: 248-299-1919 • Fax: 248-299-1911
EncoreLandscapeLighting@hotmail.com

© 2020 Encore Landscape Lighting

PATH & AREA LIGHTING

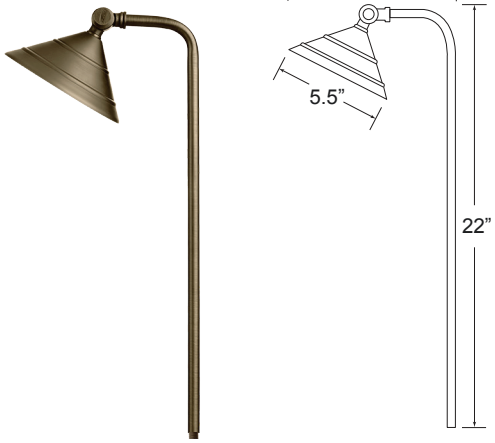


BL-01-B

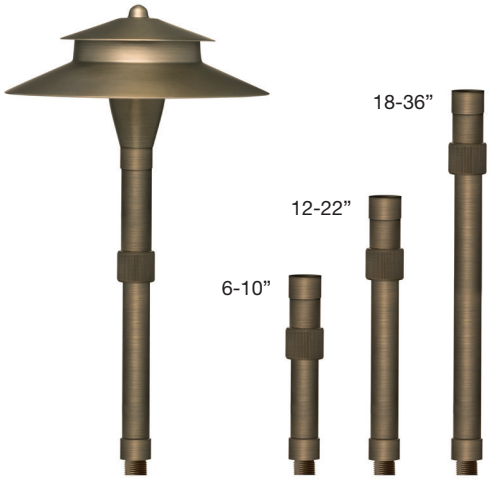


BL-02 W/ ADJ RISER

(The adjustable risers are available with all pathway lights with the perfect post system)

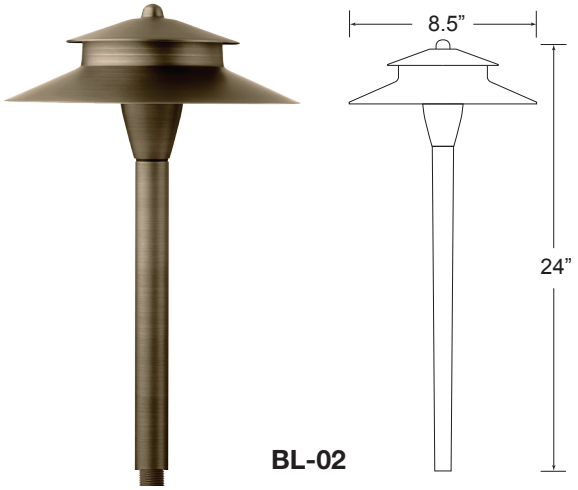


BL-02

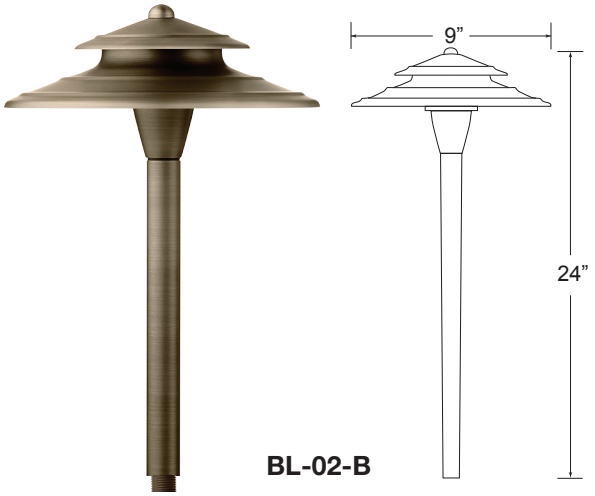


BL-02-B

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	**BL-01-B**	Spun Brass Articulating Shade with Angled Tubular Brass Post	
	BL-02 / BL-02-B	Solid Cast Brass Shade with Heavy Brass Post	
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED (BL-02 & BL-02-B)		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**BL-01-B**	22”	**Light Spread:** 6-12’
	BL-02 / BL-02-B	24”	**Light Spread:** 10-12’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36” (For use with BL-02 & BL-02-B)		

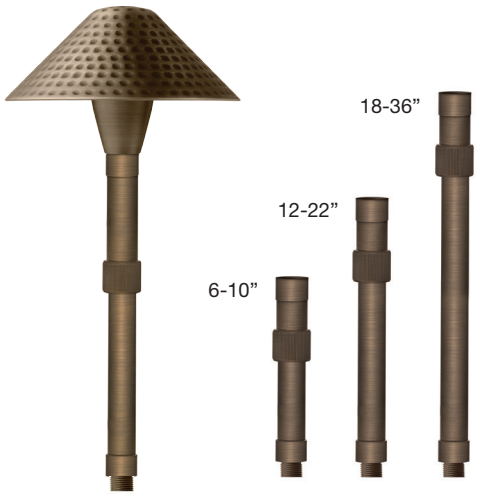


BL-05 W/ ADJ RISER


(The adjustable risers are available with all pathway lights with the perfect post system)

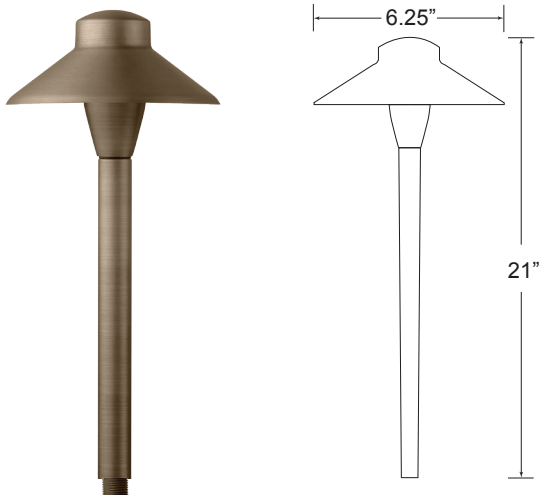

BL-04

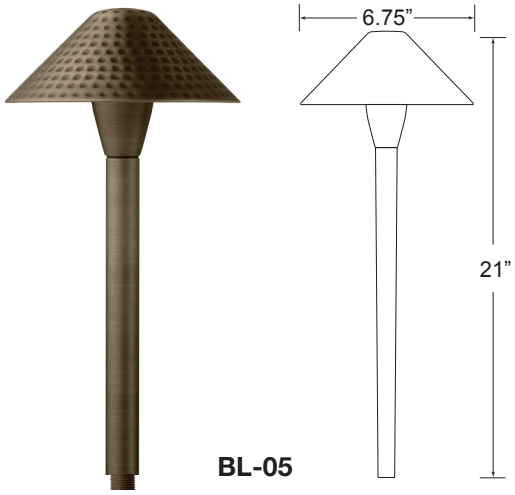

BL-05

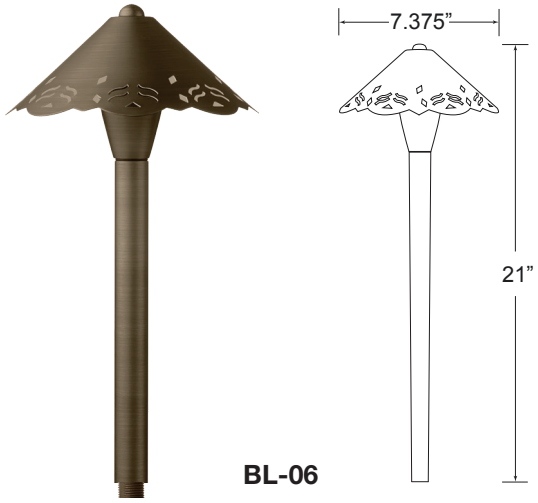


BL-06

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-801 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome
HEIGHT	21” **Light Spread:** 8-10’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36”


PATH & AREA LIGHTING




BL-07

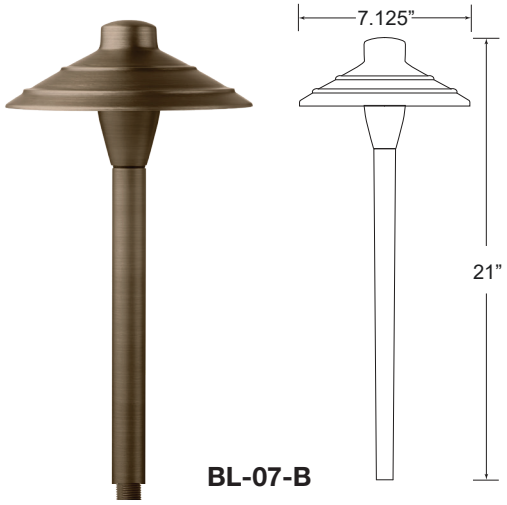

BL-07-B

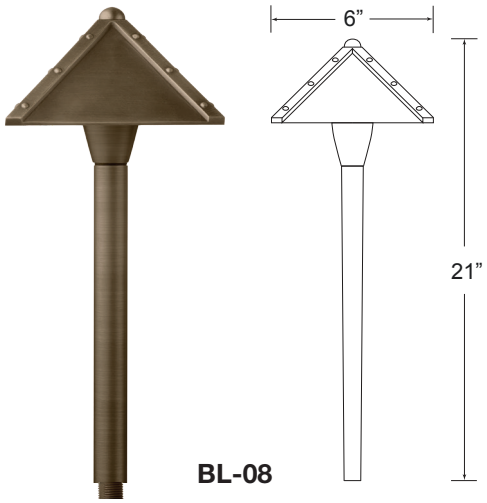

BL-08

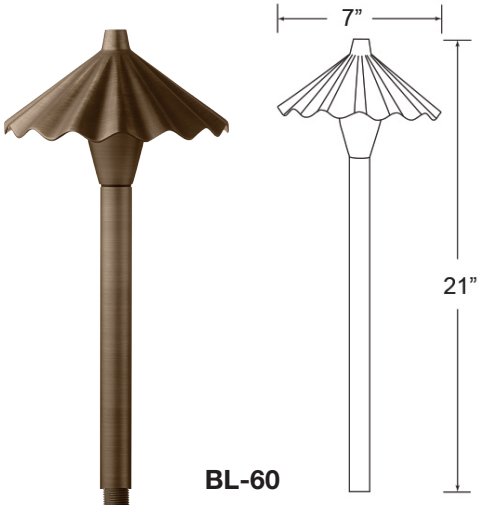

BL-60

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**BL-07 / BL-07-B**	21”	**Light Spread:** 8-10’
	BL-08	21”	**Light Spread:** 7-9’
	BL-60	21”	**Light Spread:** 7-9’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36”		




BL-09-A



BL-09-F




BL-09-H

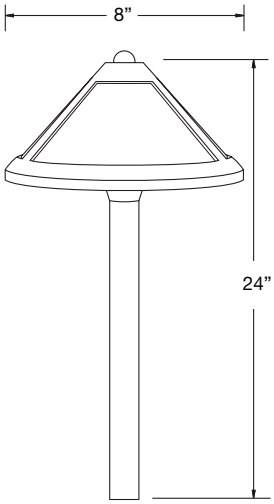




BL-10

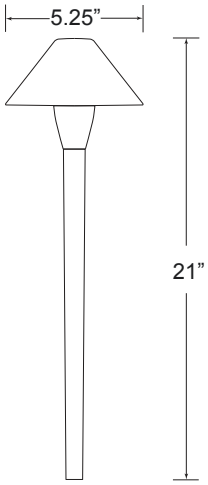




BL-11

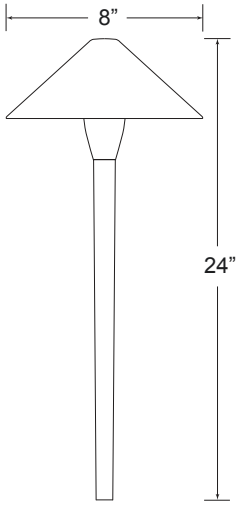


APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post		
	BL-09 Glass Shade		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin		
	Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**BL-09-A / BL-09-F / BL-09-H**	24”	**Light Spread:** 9-11’
	BL-10	21”	**Light Spread:** 6-8’
	BL-11	21”	**Light Spread:** 8-10’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36”		

PATH & AREA LIGHTING

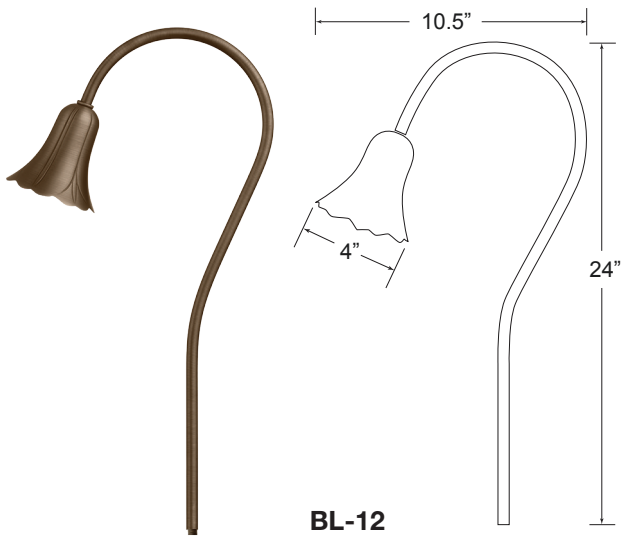


BL-12

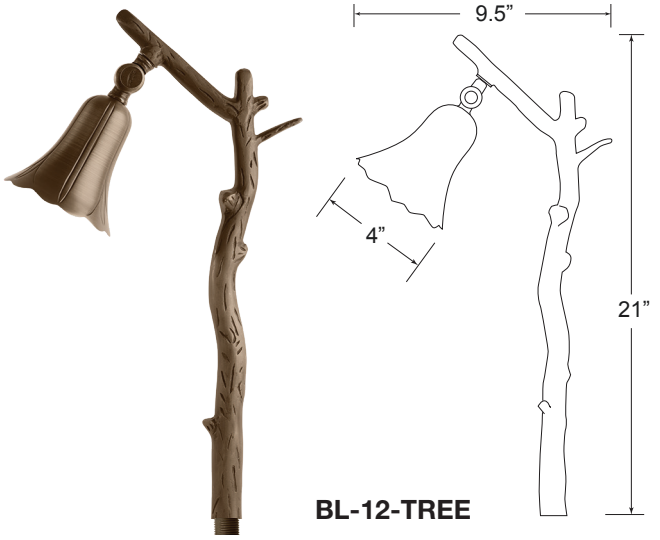

BL-12-TREE




BL-13

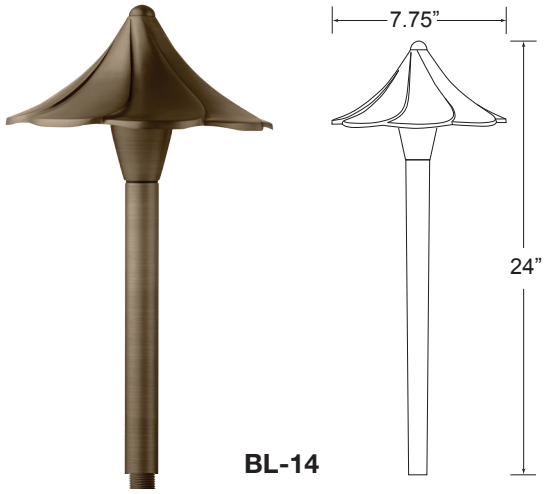


BL-14

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin		
	Wi-Fi RGBW LED (BL-13 & BL-14)		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**BL-12**	24”	**Light Spread:** 4-6’
	BL-12-TREE	21”	**Light Spread:** 4-10’
	BL-13	21”	**Light Spread:** 7-9’
	BL-14	24”	**Light Spread:** 8-10’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36” (For use with BL-13 & BL-14)		

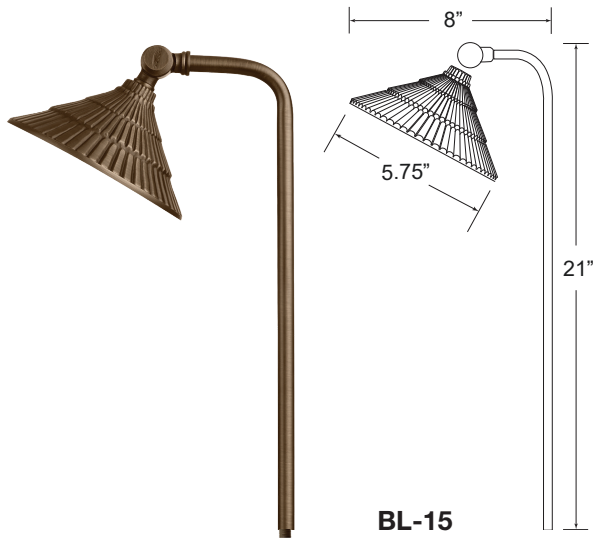


BL-15

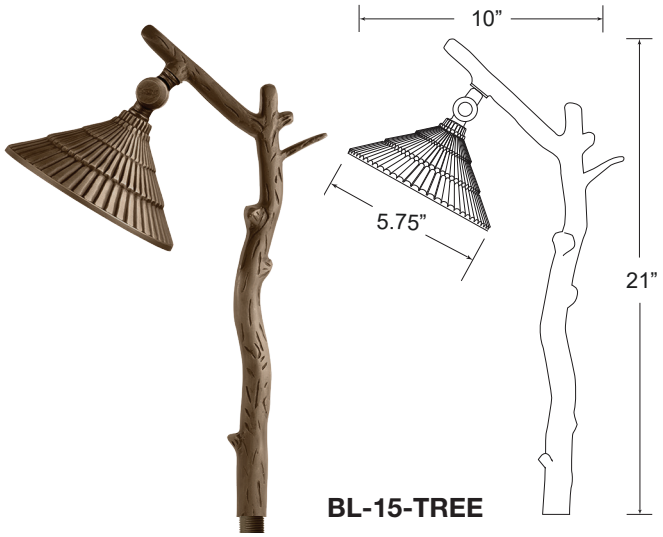

BL-15-TREE



BL-17

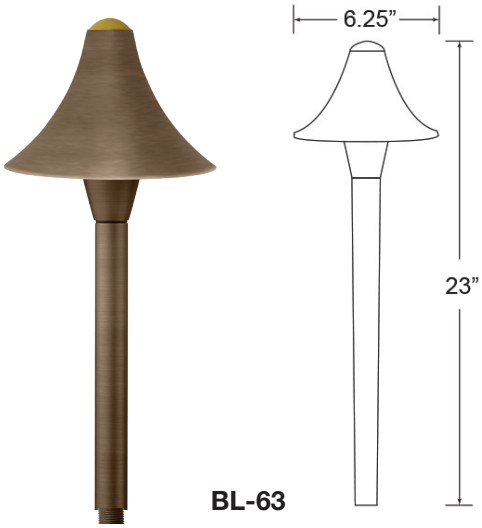

BL-63

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin		
	Wi-Fi RGBW LED (BL-17 & BL-63)		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**BL-15**	24”	**Light Spread:** 7-9’
	BL-15-TREE	21”	**Light Spread:** 4-10’
	BL-17	21”	**Light Spread:** 8-10’
	BL-63	23”	**Light Spread:** 6-8’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36” (For use with BL-17 & BL-63)		


PATH & AREA LIGHTING



BL-18



BL-18-VG

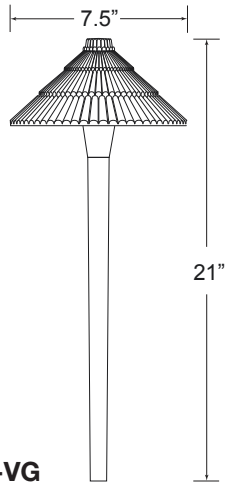






BL-19




BL-19-VG

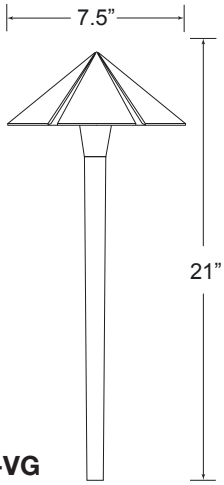




APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post
FINISH	Antiqued Brass / Aged Verde
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-801 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome
HEIGHT	21” **Light Spread:** 8-10’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36”

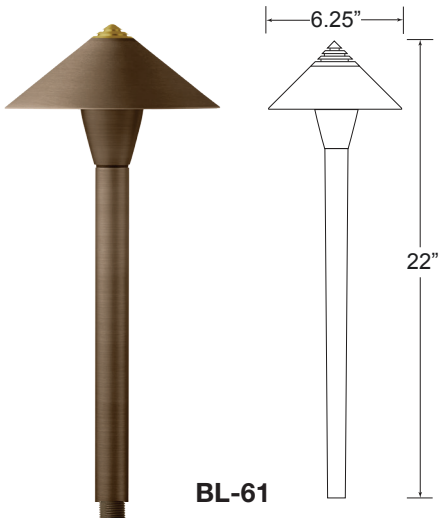


BL-61

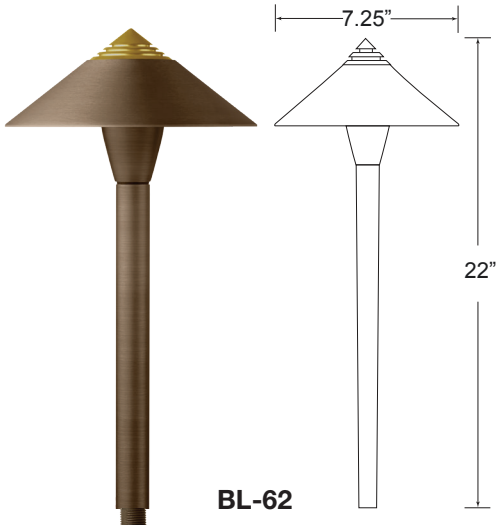

BL-62




BL-64

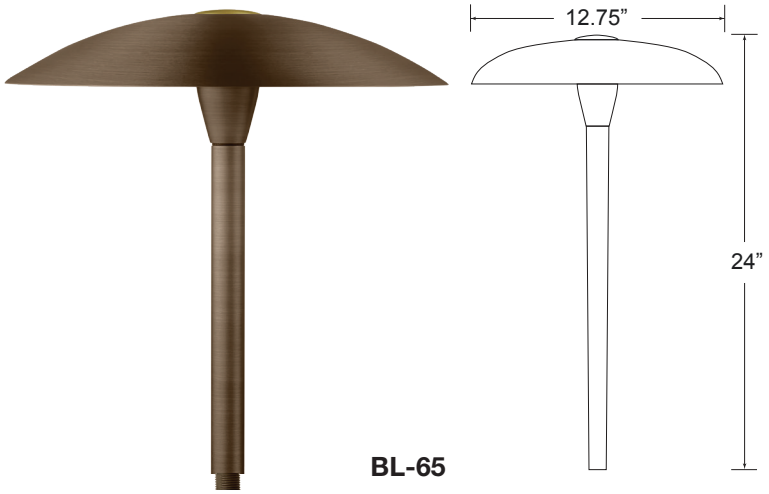


BL-65

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-801 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome
HEIGHT	**BL-61** 22” **Light Spread:** 7-9’ **BL-62** 22” **Light Spread:** 8-10’ **BL-64** 21” **Light Spread:** 8-10’ **BL-65** 24” **Light Spread:** 12-15’
OTHER OPTIONS	Adjustable Telescoping Post: 6-10”, 12-22”, 18-36”


PATH & AREA LIGHTING

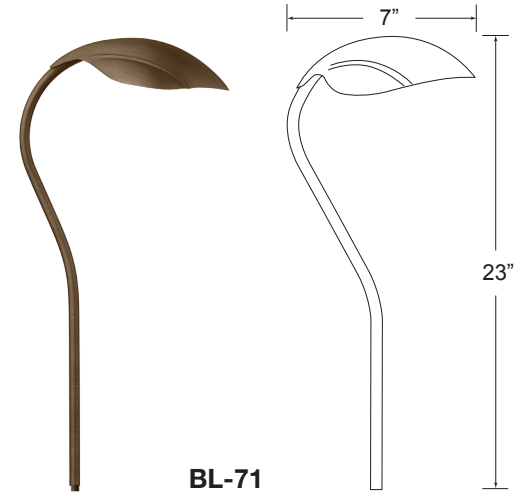


BL-71

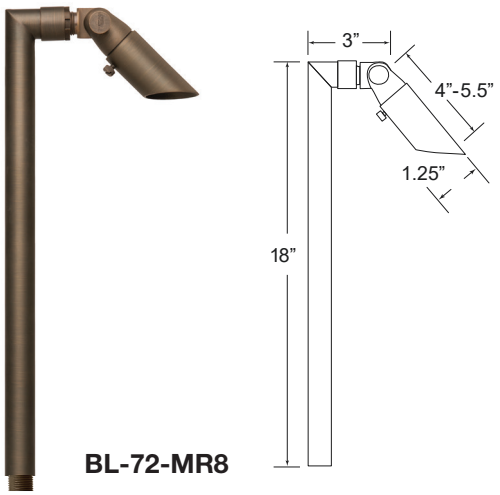

BL-72-MR8

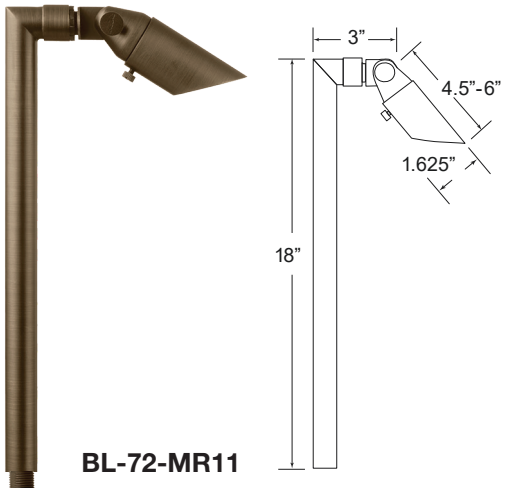


BL-72-MR11

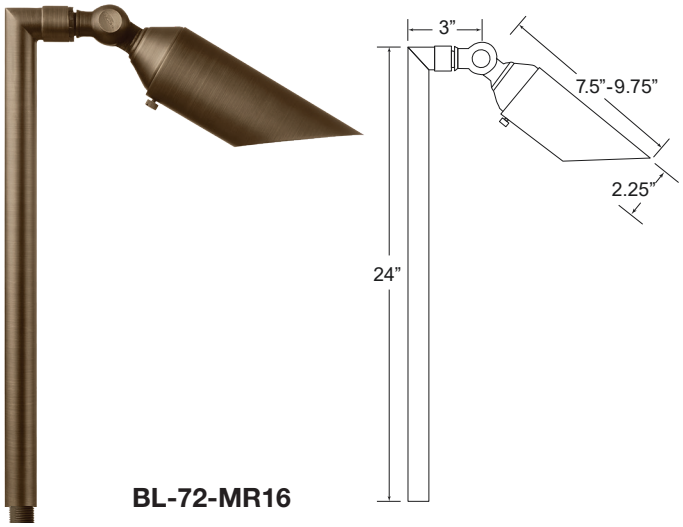


BL-72-MR16


APPLICATION	Illuminating Pathways, Bed Areas and Driveways.	
CONSTRUCTION	Solid Cast Brass Bullet Light with Brass Elbowed Post	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	**BL-71**	3 Watt G4 LED Bi-Pin
	BL-72-MR8	3 Watt MR8 LED Bi-Pin
	BL-72-MR11	3 Watt MR11 LED Bi-Pin
	BL-72-MR16	4, 6, 9 Watt MR16 LED Bi-Pin
LED LAMP OPTIONS	Bluetooth RGBW LED (BL-72-MR16)	
LENS	Clear Flat Glass (BL-72’s)	
OPTIONAL LENS	Frosted Flat Glass	
HEIGHT	**BL-71**	23”
	BL-72-MR8	18”
	BL-72-MR11	18”
	BL-72-MR16	24”

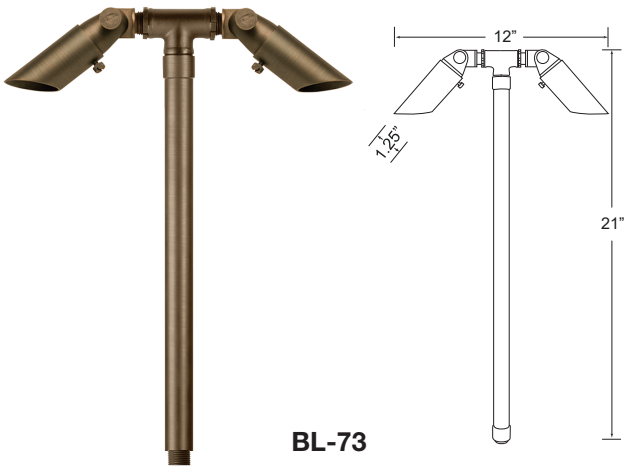


BL-73

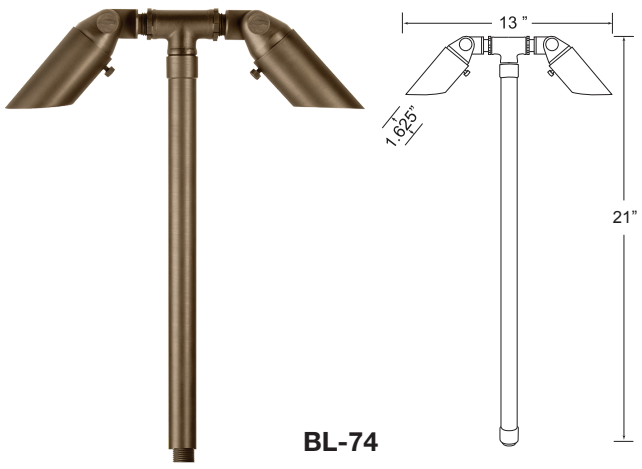

BL-74

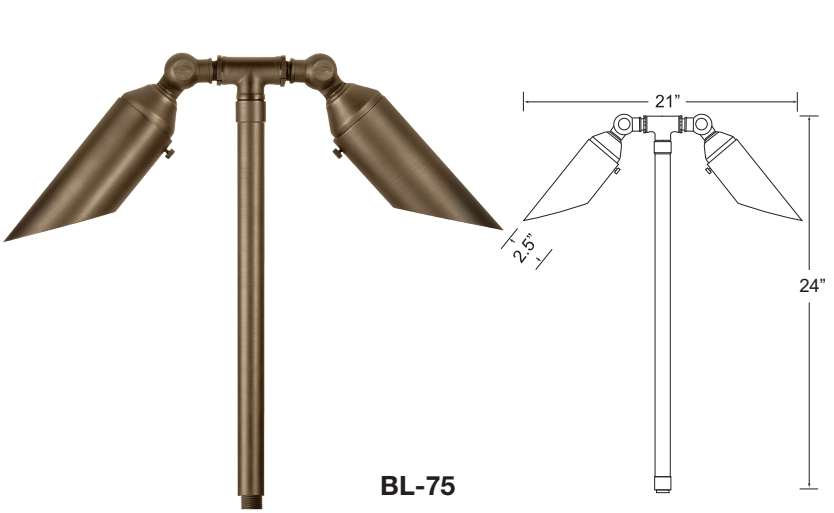


BL-75

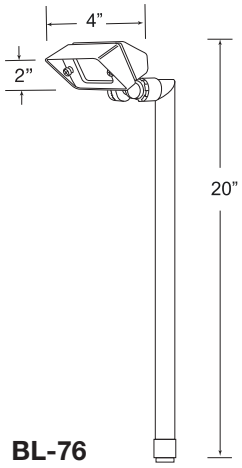


BL-76


APPLICATION	Illuminating Pathways, Bed Areas and Driveways	
CONSTRUCTION	Solid Cast Brass Bullet Light with Brass Tee/Elbowed Post	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	**BL-73**	(2) 3 Watt MR8 LED Bi-Pin
	BL-74	(2) 3 Watt MR11 LED Bi-Pin
	BL-75	(2) 4, 6, 9 Watt MR16 LED Bi-Pin
	BL-76	3 Watt LED Panel
LED LAMP OPTIONS	Bluetooth RGBW LED (BL-75)	
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	
HEIGHT	**BL-73 / BL-74**	21”
	BL-75	24”
	BL-76	20”

DOWN LIGHTING

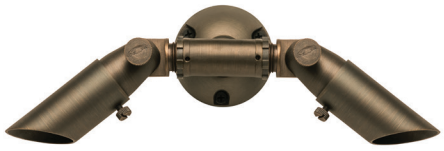



BL-77-MR8



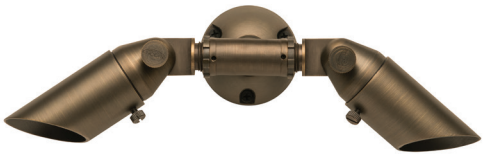


BL-77-MR11

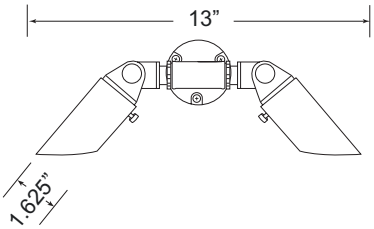


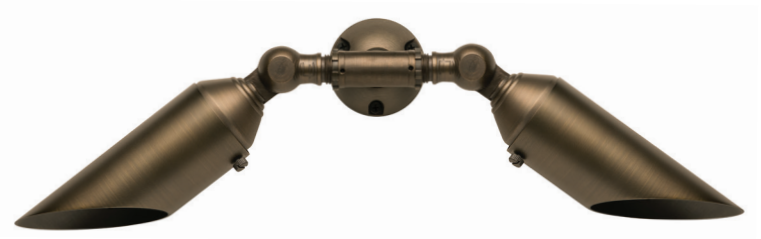

BL-77-MR16

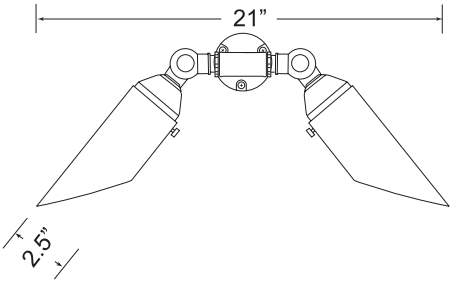


APPLICATION	Down Lighting from Walls or in Trees	
CONSTRUCTION	Solid Cast Brass Bullet Light with Brass Tee and Brass Round Mount	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**BL-77-MR8**	3 Watt MR8 LED Bi-Pin
	BL-77-MR11	3 Watt MR11 LED Bi-Pin
	BL-77-MR16	4, 6, 9 Watt MR16 LED Bi-Pin
LED LAMP OPTIONS	Bluetooth RGBW LED (BL-77-MR16)	
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	

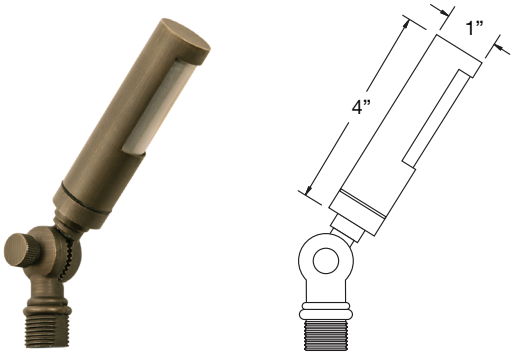


BL-78



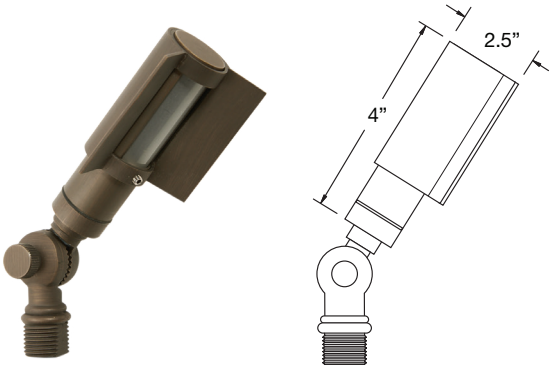


BL-78 with Shroud

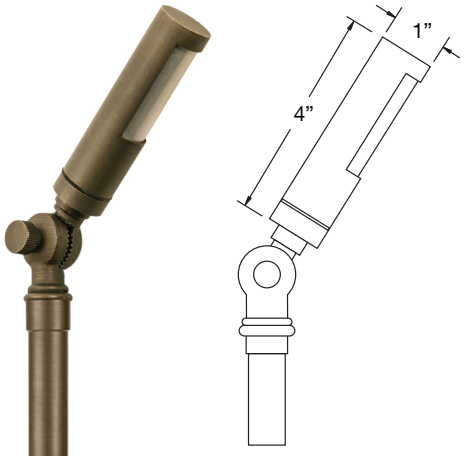


BL-78 with Riser

APPLICATION	Illuminating Pathways and Bed Areas
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-800 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt LED G4 Bi-Pin
LENS	Frosted Glass


PATH & AREA LIGHTING

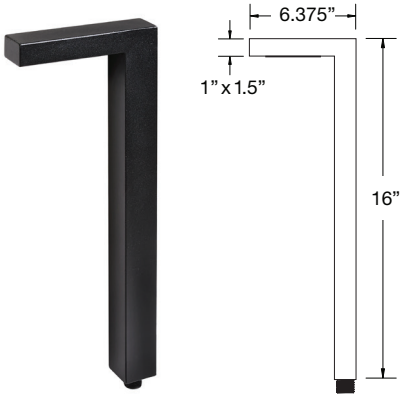


MDS-01

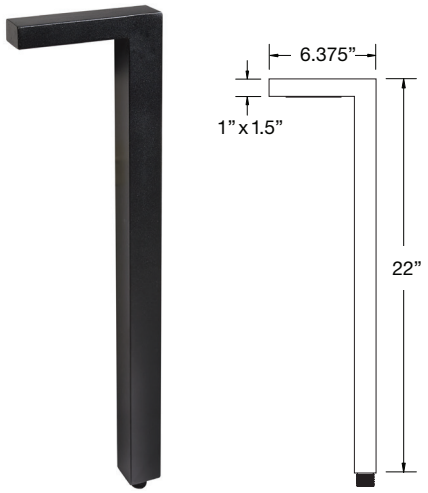

MDS-02

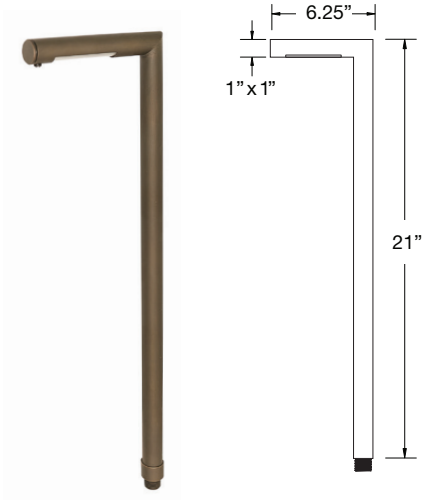


MDB-03

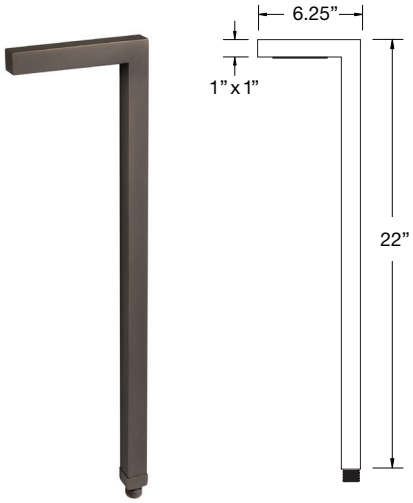


MDB-04

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	**MDS-01 / MDS-02**	Stainless Steel	
	MDB-03 / MDB-04	Solid Cast Brass	
FINISH	**MDS-01 / MDS-02**	Black Textured Powder Coat	
	MDB-03 / MDB-04	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	**MDS-01 / MDS-02**	3 Watt Integrated LED	
	MDB-03 / MDB-04	3 Watt LED G4 Bi-Pin	
LED LAMP OPTIONS	**MDB-03 / MDB-04**	1 Watt, 2 Watt, LED G4 Bi-Pin	
LENS	Frosted Glass		
HEIGHT	**MDS-01**	16”	**Light Spread:** 5-7’
	MDS-02	22”	**Light Spread:** 6-8’
	MDB-03	21”	**Light Spread:** 6-8’
	MDB-04	22”	**Light Spread:** 6-8’

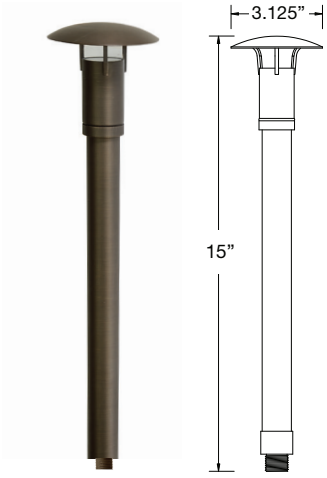


MDB-05



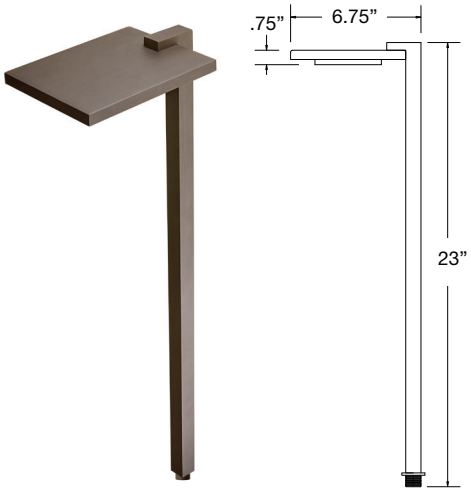


MDB-06

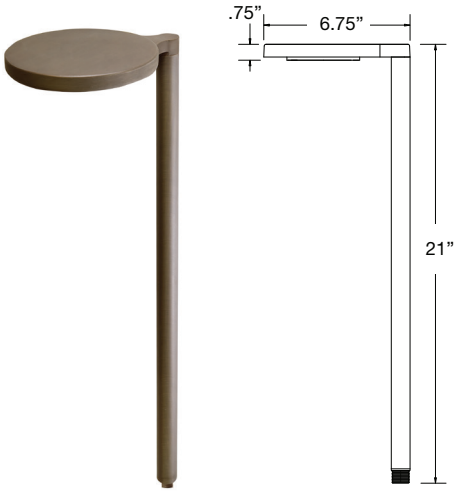


MDB-07

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	4 Watt Integrated LED		
LENS	Frosted Glass		
HEIGHT	**MDB-05** 15”	**Light Spread:** 4-6’	
	MDB-06 23”	**Light Spread:** 8-10’	
	MDB-07 21”	**Light Spread:** 8-10’	


PATH & AREA LIGHTING / BOLLARDS

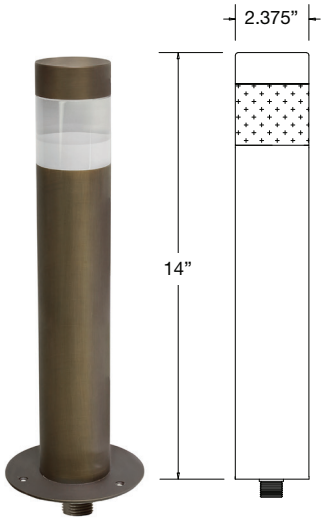

BOL-01

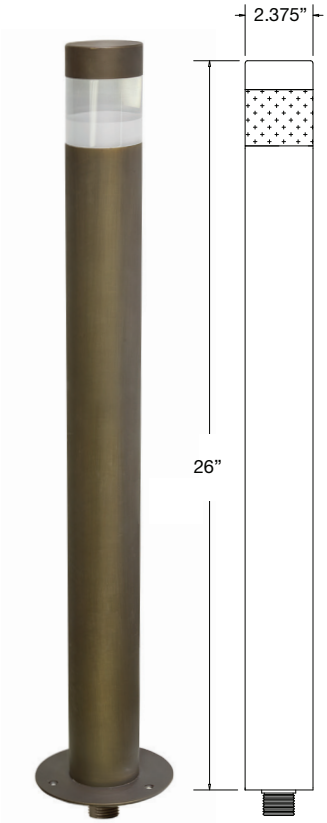


BOL-02

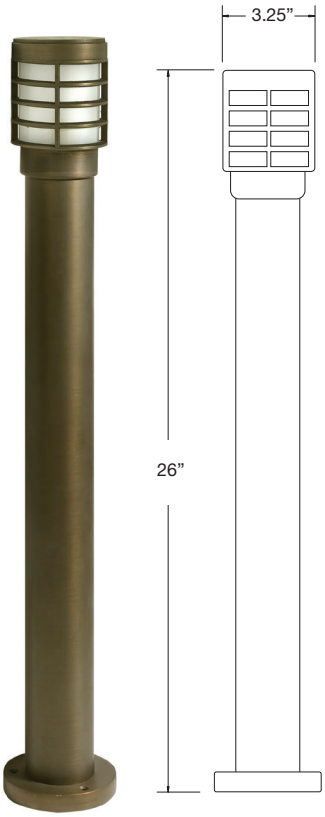


BOL-20

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Solid Cast Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake		
LED LAMP	4 Watt LED MR16		
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED, 9 Watt MR16 Bluetooth RGBW LED Wi-Fi RGBW LED		
LENS	Clear Glass		
HEIGHT	**BOL-01**	14”	**Light Spread:** 8-10’
	BOL-02 / BOL-20	26”	**Light Spread:** 10-12’
SPECIAL FEATURE	Surface Mount or Stake Mount		

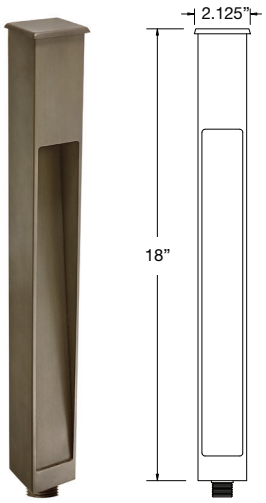


BOL-03

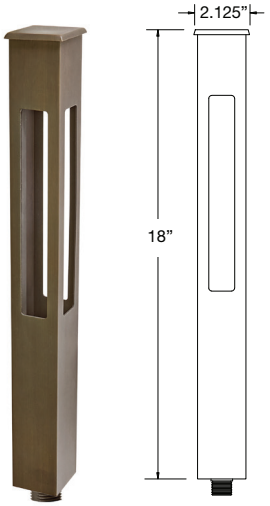

BOL-04




BOL-13

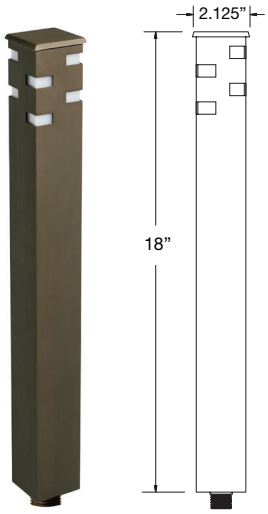


BOL-14

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	**BOL-03 / BOL-04**	4 Watt Integrated LED	
	BOL-13 / BOL-14	4 Watt LED G4 Bi-Pin	
HEIGHT	**BOL-03**	18”	**Light Spread:** 4-6’
	BOL-04	18”	**Light Spread:** 6-8’
	BOL-13	18”	**Light Spread:** 4-6’
	BOL-14	18”	**Light Spread:** 4-6’


PATH & AREA LIGHTING / BOLLARDS

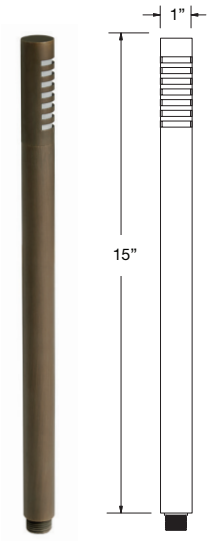


BOL-09

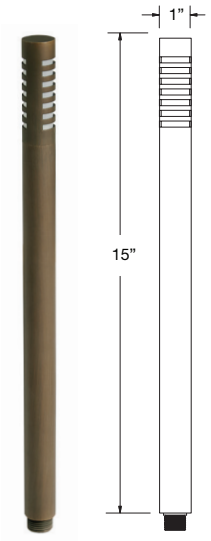


BOL-10

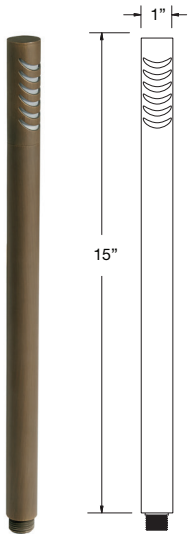

BOL-11

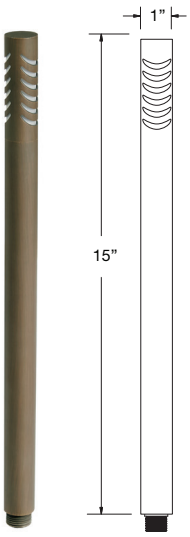


BOL-12

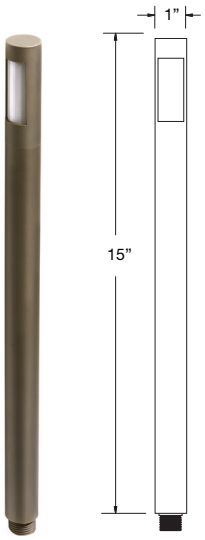

BOL-15

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-800 Heavy Duty Ground Stake		
LED LAMP	3 Watt G4 LED Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt G4 LED Bi-Pin		
HEIGHT	**BOL-09**	15”	**Light Spread:** 4-6’
	BOL-10	15”	**Light Spread:** 6-8’
	BOL-11	15”	**Light Spread:** 4-6’
	BOL-12	15”	**Light Spread:** 6-8’
	BOL-15	15”	**Light Spread:** 6-8’

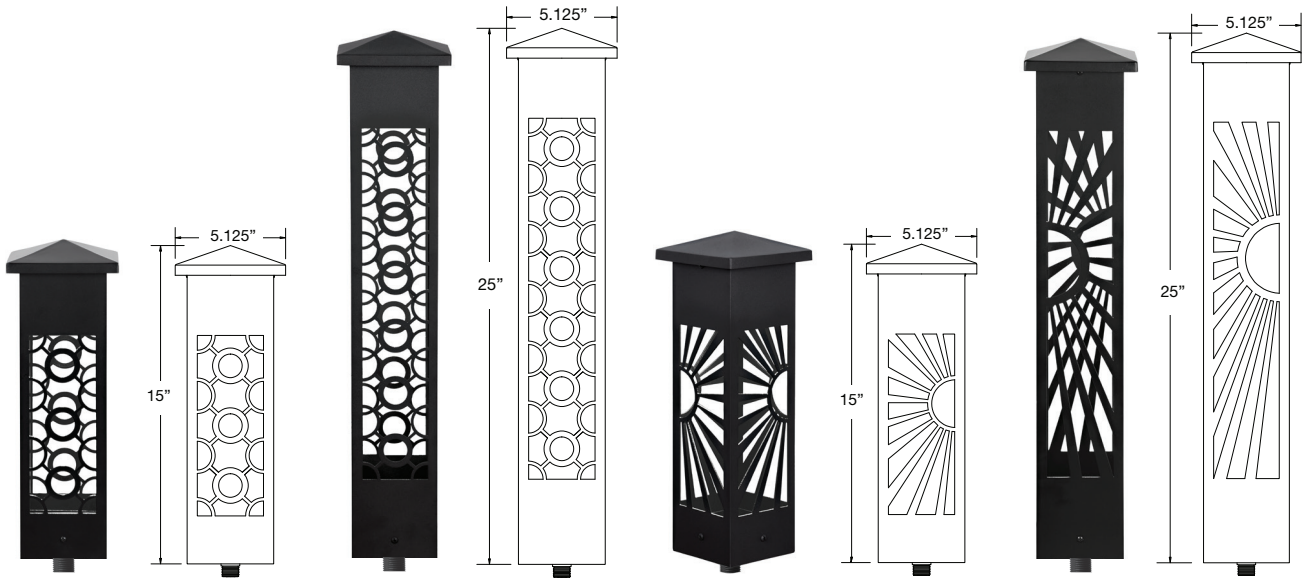


BOL-05 **BOL-06** **BOL-07** **BOL-08**

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Aluminum		
FINISH	Black Powder Coat		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	4 Watt LED MR16		
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED		
HEIGHT	**BOL-05**	15"	**Light Spread:** 8-10'
	BOL-06	25"	**Light Spread:** 10-12'
	BOL-07	15"	**Light Spread:** 8-10'
	BOL-08	25"	**Light Spread:** 10-12'

PATH & AREA LIGHTING




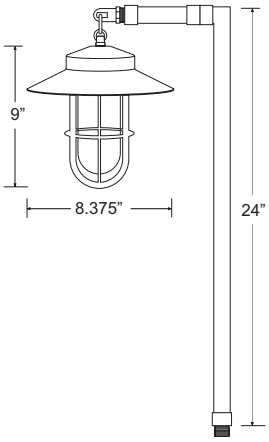

BL-201-HL






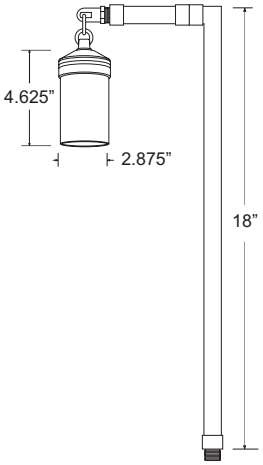


BL-202-HL



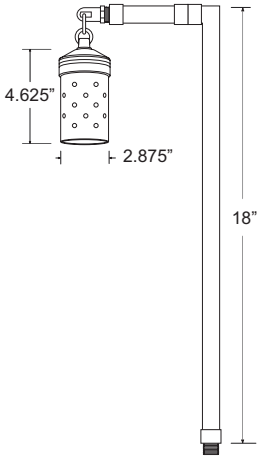

BL-203-HL

APPLICATION	Illuminating Pathways, Bed Areas and Driveways	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	**BL-201-HL**	A19 Medium Base LED Lamp 2 Watt, 4 Watt or 6 Watt
	BL-202-HL	MR16 LED 4 Watt or 6 Watt G4 LED 4 Watt Bi-Pin Wi-Fi RGBW LED
	BL-203-HL	G4 LED 4 Watt Bi-Pin Wi-Fi RGBW LED

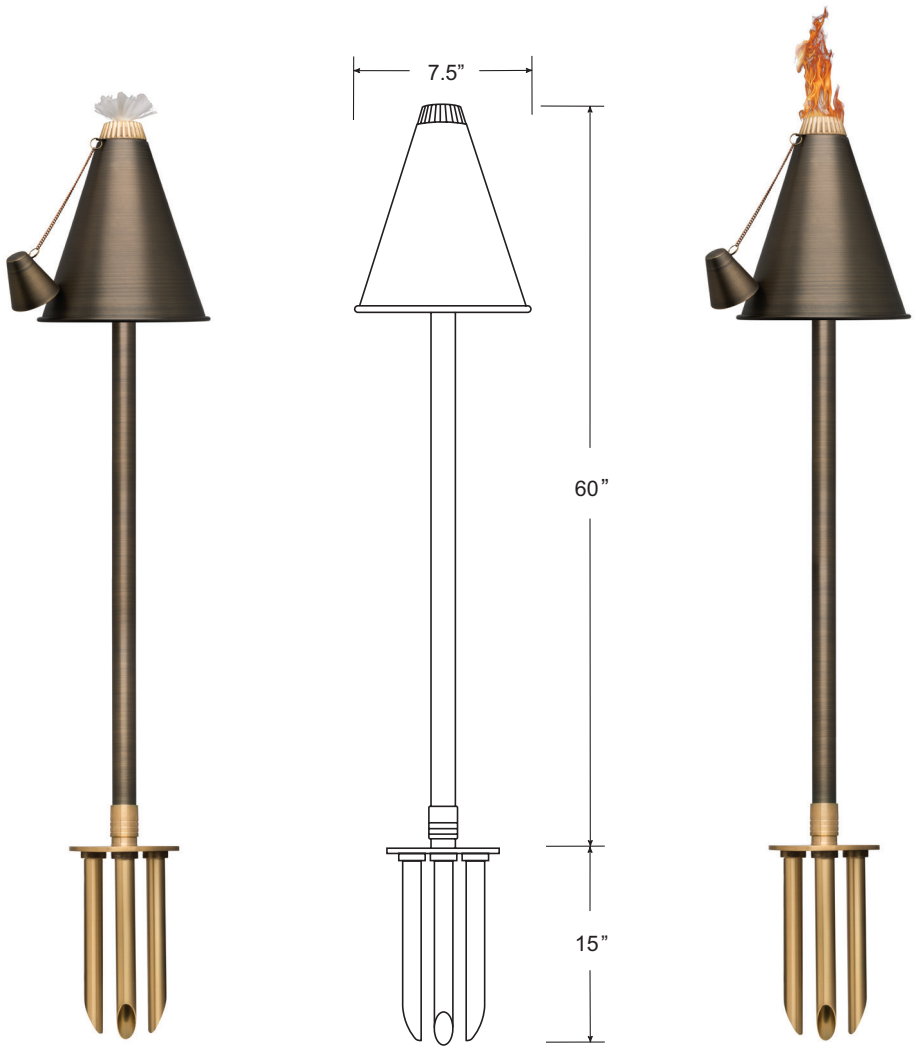

TIKI TORCH

APPLICATION	Illuminating Pathways, Bed Areas, Driveways, Deck Areas, Entertainment Areas
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post Two in One - Oil Filled Reservoir for Flame Effect and LED Light Source
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-805 Super Heavy Duty Three Prong Brass Ground Stake
LED LAMP	4 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome
HEIGHT	60” **Light Spread:** 12-15’

PATH & AREA LIGHTING / BOLLARDS







	BOL-102	BOL-102-B	BOL-105
Fixture Height	15”	15”	15”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included







	BOL-202	BOL-202-B	BOL-205
Fixture Height	26”	26”	26”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted







	BOL-106	BOL-107	BOL-107-B
Fixture Height	15”	15”	15”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included







	BOL-206	BOL-207	BOL-207-B
Fixture Height	26”	26”	26”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted

PATH & AREA LIGHTING / BOLLARDS







	BOL-108	BOL-109-F	BOL-109-H
Fixture Height	15”	15”	15”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included







	BOL-208	BOL-209-F	BOL-209-H
Fixture Height	26”	26”	26”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted







	BOL-111	BOL-113	BOL-114
Fixture Height	15”	15”	15”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included







	BOL-211	BOL-213	BOL-214
Fixture Height	26”	26”	26”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted

PATH & AREA LIGHTING / BOLLARDS







	BOL-117	BOL-118	BOL-119
Fixture Height	15”	15”	15”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included







	BOL-217	BOL-218	BOL-219
Fixture Height	26”	26”	26”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted







	BOL-162	BOL-164	BOL-165
Fixture Height	15”	15”	15”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included









	BOL-262	BOL-264	BOL-265
Fixture Height	26”	26”	26”
Post Diameter	2.375”	2.375”	2.375”
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted


UP & DOWN LIGHTING

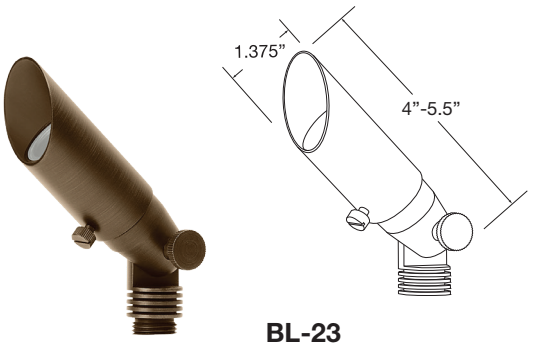


BL-23

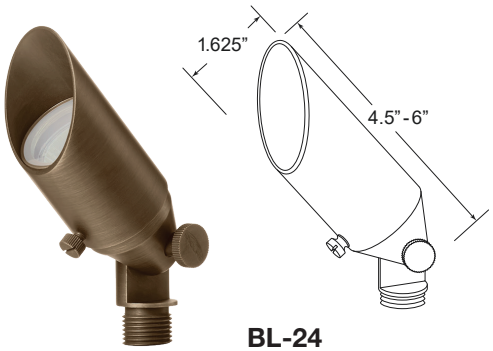

BL-24

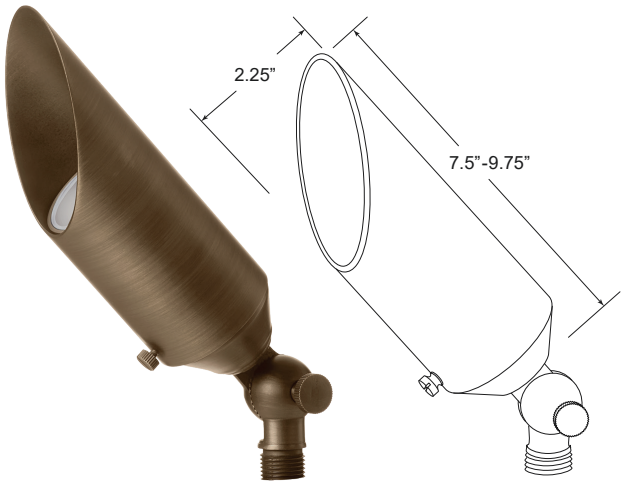


BL-25

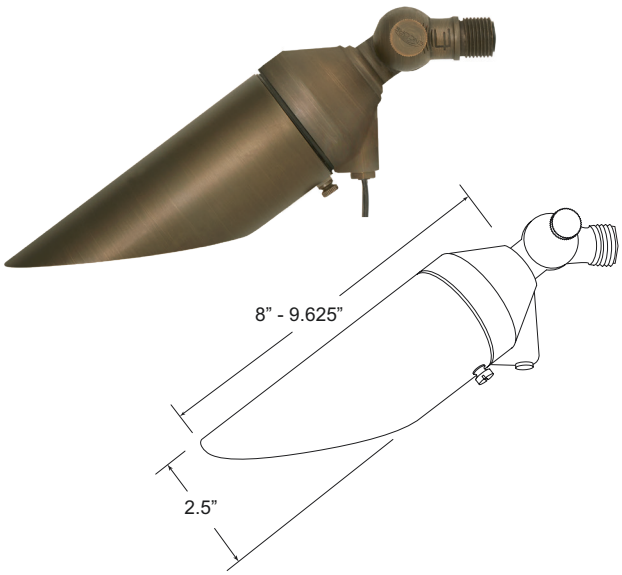


DL-25

APPLICATION	Up or Down Lighting of Trees, Homes and Structures	
CONSTRUCTION	Solid Cast Brass with Telescoping, 360 Degree Rotatable Shroud	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire **DL-25**	50 Feet of 18-2 Wire
STAKE	X-800 Heavy Duty Ground Stake (BL-23, BL-24, BL-25)	
LED LAMP	**BL-23**	3 Watt LED MR8
	BL-24	3 Watt LED MR11
	BL-25 / DL-25	4 Watt, 6 Watt, or 9 Watt LED MR16
LED LAMP OPTIONS	**BL-25 / DL-25**	Bluetooth RGBW LED
LENS	Clear Glass	
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue	

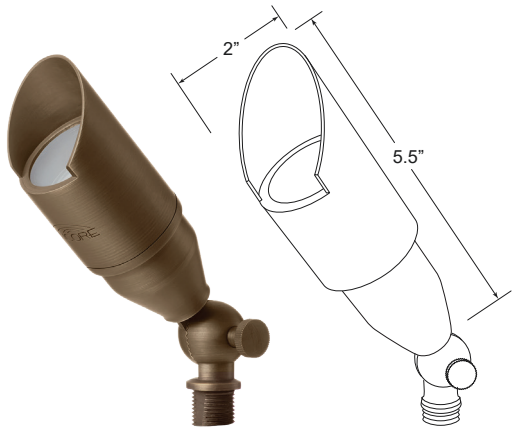


BL-20



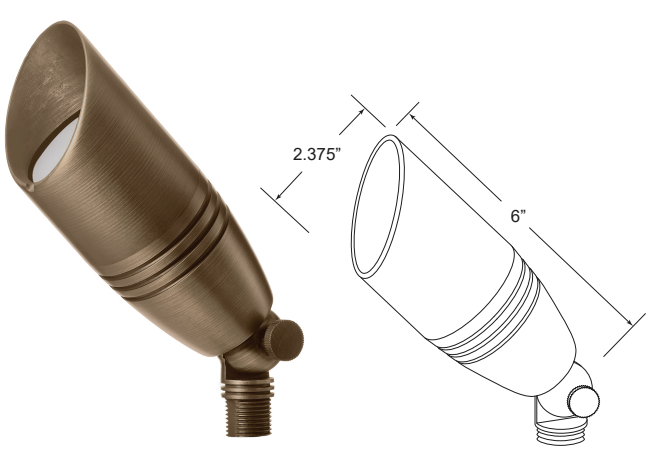


BL-26

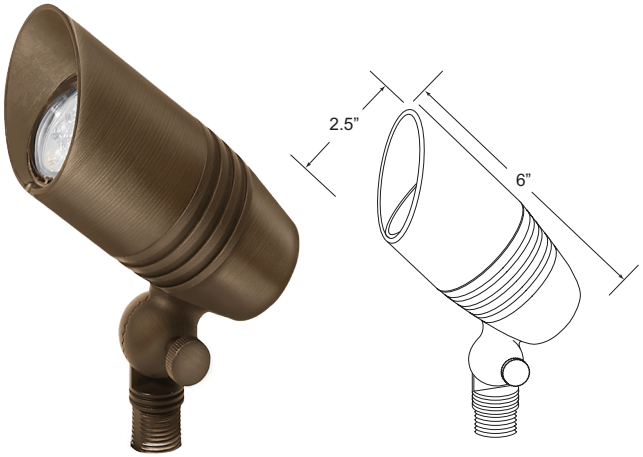


BL-28

APPLICATION	Up or Down Lighting of Trees, Homes and Structures	
CONSTRUCTION	Solid Cast Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-800 Heavy Duty Ground Stake	
LED LAMP	**BL-20**	4 Watt or 6 Watt LED MR16
	BL-26 / BL-28	4 Watt, 6 Watt, or 9 Watt LED MR16
LED LAMP OPTIONS	**BL-26 / BL-28**	Bluetooth RGBW LED
		Wi-Fi RGBW LED
LENS	Clear Glass	
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue	


UP & DOWN LIGHTING

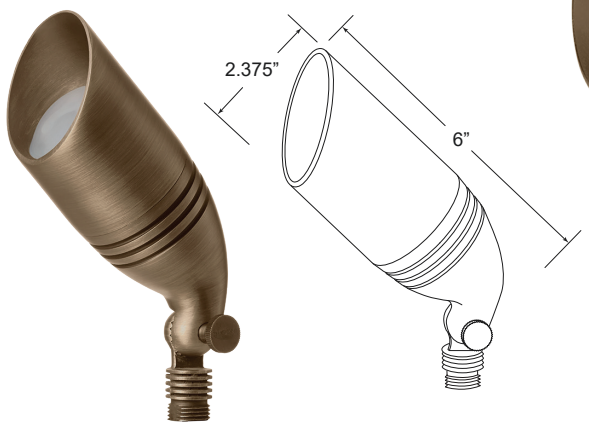

BL-27

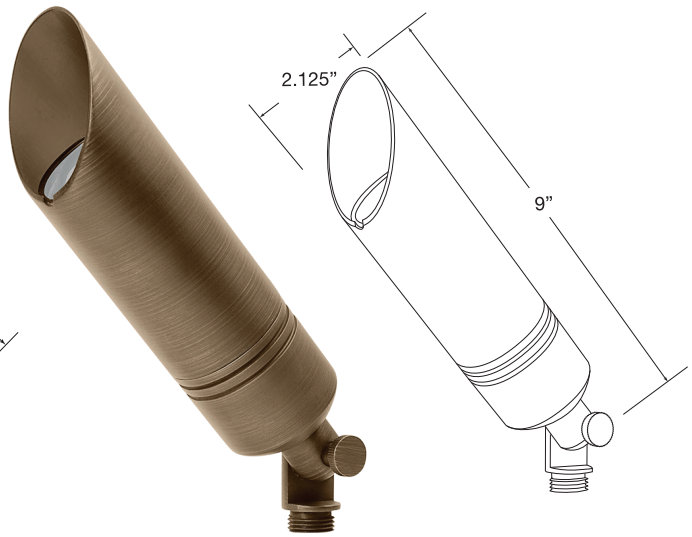


BL-29

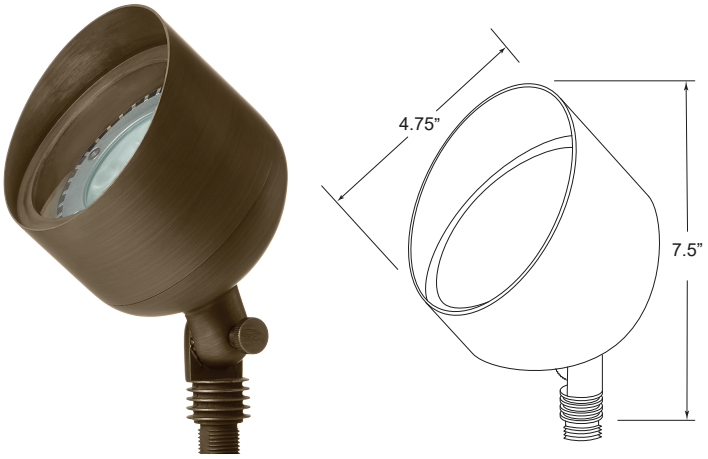

BL-32


APPLICATION	Up or Down Lighting of Trees, Homes and Structures	
CONSTRUCTION	Solid Cast Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	**BL-27 / BL-29**	X-800 Heavy Duty Ground Stake
	BL-32	X-801 Heavy Duty Ground Stake
LED LAMP	**BL-27**	4 Watt or 6 Watt LED MR16
	BL-29	4 Watt, 6 Watt, or 9 Watt LED MR16
	BL-32	10 Watt LED PAR36
LED LAMP OPTIONS	**BL-32**	6 Watt, 13 Watt, 17 Watt LED PAR36
	BL-29 / BL-32	Bluetooth RGBW LED
LENS	Clear Glass	
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue	





BL-30



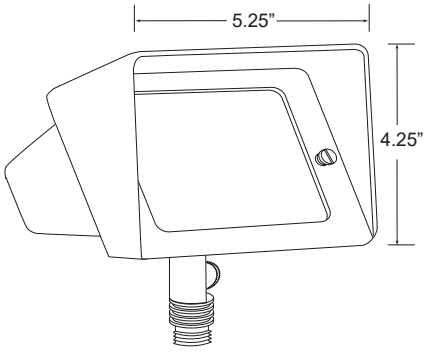


BL-31

APPLICATION	Up or Down Lighting of Walls, Signs, Buildings, Homes, Water Features and Structures	
CONSTRUCTION	Solid Cast Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	**BL-30**	X-800 Heavy Duty Ground Stake
	BL-31	X-801 Heavy Duty Ground Stake
LED LAMP	**BL-30**	3 Watt LED Panel
	BL-31	6 Watt LED Panel
LED LAMP OPTIONS	**BL-31**	4 Watt or 6 Watt LED MR16
	BL-30	3 Watt or 4 Watt G4 LED
	BL-31	20 Watt Super Bright LED Panel
	BL-31	Wi-Fi RGBW LED
LENS	Clear, Frosted and Linear Glass	


DECK / STEP LIGHTING






SD-01-BR






SD-02



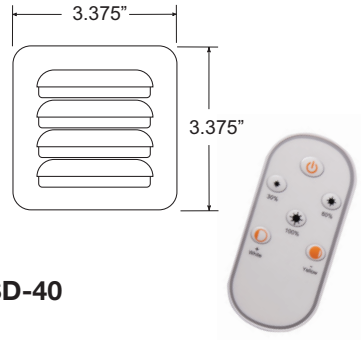


SD-40


APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks	
CONSTRUCTION	Solid Brass	
FINISH	**SD-01-BR**	Natural Brass or Powder Coated
	SD-02	Antiqued Brass
	SD-40	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**SD-01-BR**	3 Watt LED G4 Bi-Pin
	SD-02	3 Watt LED Wedge Base
	SD-40	Integrated Adjustable CCT (Kelvin) Adjustable from 2200k to 5000k with Dimming Options
LED LAMP OPTIONS	**SD-01-BR**	1 Watt or 2 Watt G4 Bi-Pin
	SD-02	1 Watt or 2 Watt Wedge Base

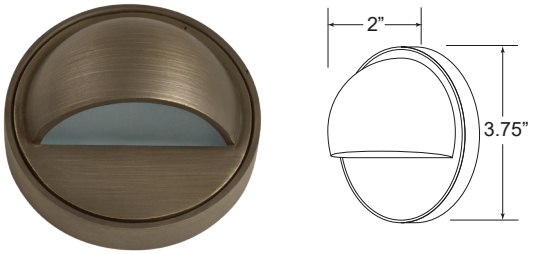

SD-46

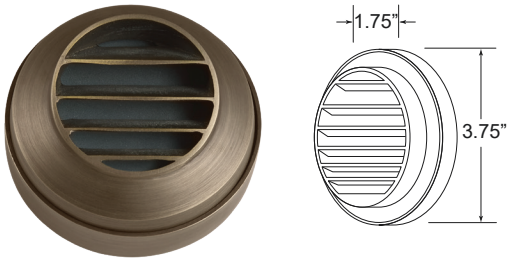


SD-47

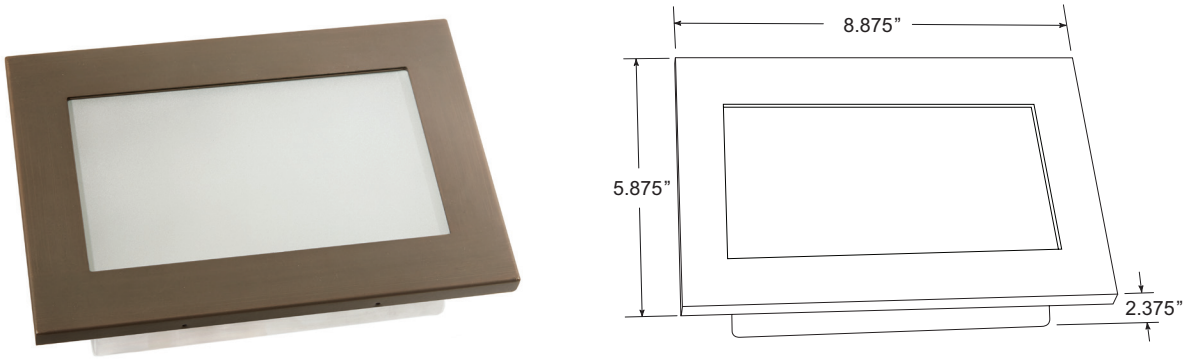


SD-60 BRICK PAVER

APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks, Brick Pavers	
CONSTRUCTION	Solid Brass	
FINISH	**SD-46 / SD-47**	Antiqued Brass
	SD-60	Antiqued Brass Cover, Stainless Steel Body
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**SD-46 / SD-47**	2 Watt LED T3 (G4)
	SD-60	3 Watt LED Panel
LENS	Frosted Glass	
SPECIAL FEATURE	**SD-60** The rectangle trim cover can be powder coated to match any color brick	

DECK / STEP LIGHTING






SD-400






SD-403






SD-401



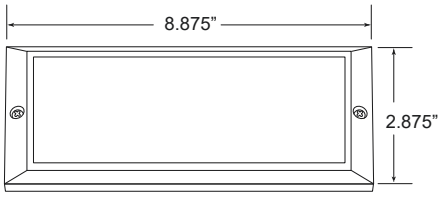


SD-404





SD-402




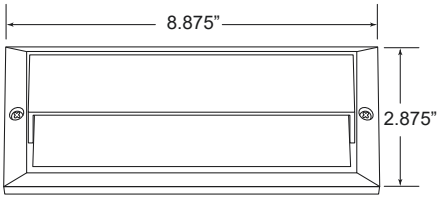


SD-405


APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks
CONSTRUCTION	Solid Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	2 Watt LED Panel
LENS	Frosted Lens



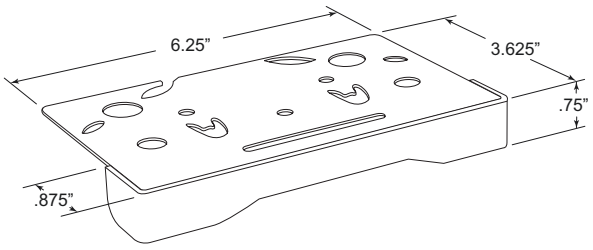



SD-506

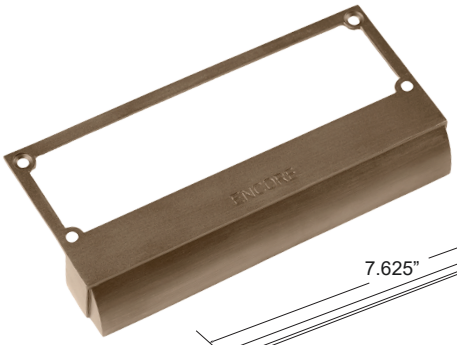

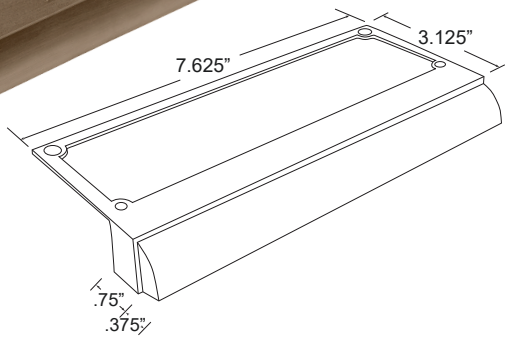


SD-500





SD-501







SD-505

APPLICATION	Illuminating Retaining Walls, Seat Walls, Steps, Decks, Railings, Outdoor Kitchens	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**SD-500 / SD-505**	3 Watt LED Lighting Strip
	SD-501 / SD-506	2 Watt LED Lighting Strip
LENS	Clear and Frosted Glass	
SPECIAL FEATURES	**SD-506**	Removable Front Plate for Easy Powdercoat Color Match


DECK / PAVER / INGROUND LIGHTING

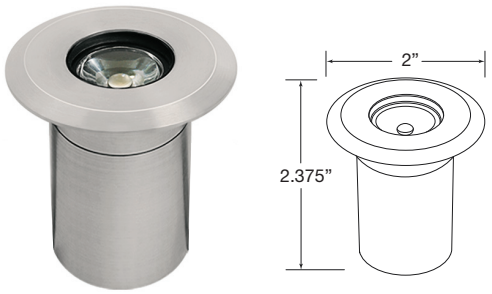


UL-53

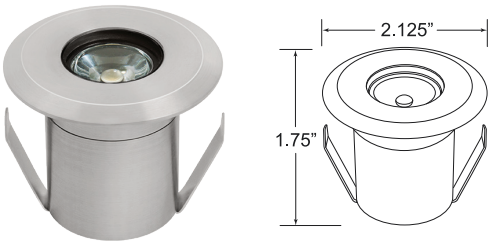

WL-90

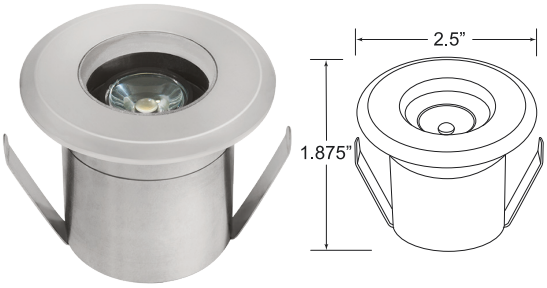

WL-92

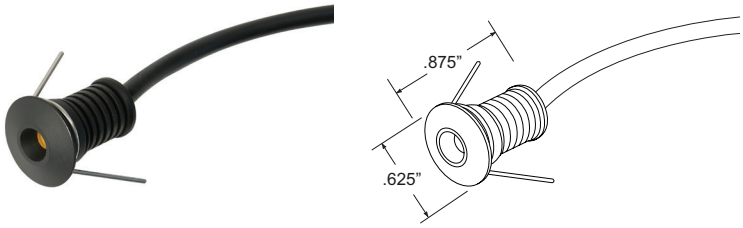

MICRO LIGHT

APPLICATION	Illuminating Walks, Pathways, Outdoor Kitchens, Soffit Lighting, Wall Lighting	
CONSTRUCTION	Stainless Steel	
FINISH	Stainless Steel	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**UL-53**	3 Watt Integrated LED (Underwater Rated)
	WL-90	1 Watt Integrated LED
	WL-92	3 Watt Integrated LED
	MICRO LIGHT	1 Watt Integrated LED
OPTIONAL LAMP	Red, Green, Blue LED	
SPECIAL FEATURES	**UL-53**	Underwater or Inground Applications
LENS	Clear Flat Glass	



WL-91



WL-93



WL-94




WL-95




WL-96



WL-97







APPLICATION	Illuminating Walks, Pathways, Outdoor Kitchens, Soffit Lighting, Wall Lighting
CONSTRUCTION	Stainless Steel with Composite Sleeve
FINISH	Nickel
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	3 Watt Integrated LED
LENS	Clear Flat Glass

UP LIGHTING / INGROUND LIGHTING




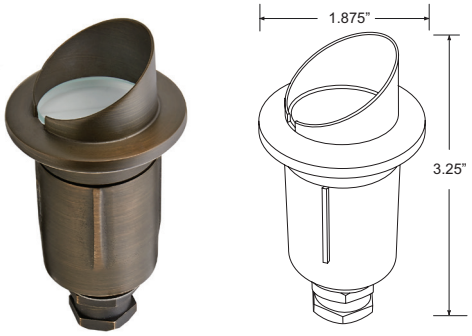


WL-80

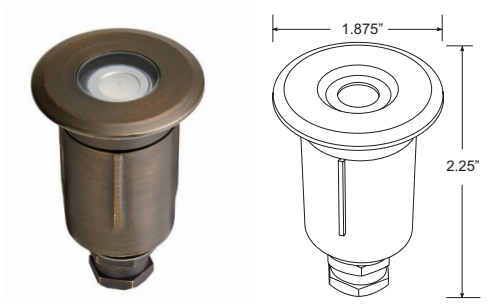

WL-81

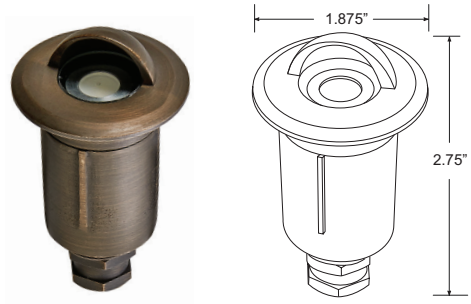

WL-83

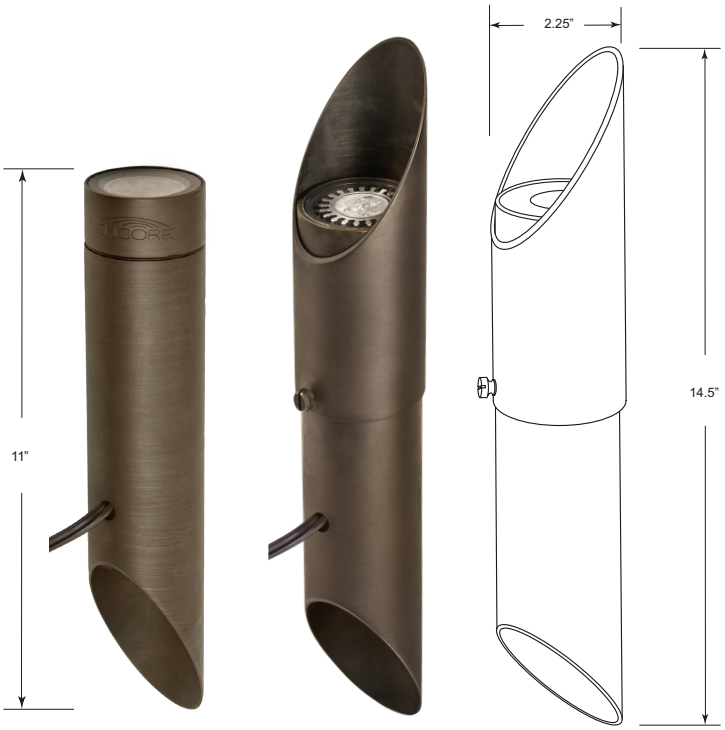

WL-25


APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars, Steps, Walkways	
CONSTRUCTION	Solid Cast Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**WL-80 / 81 / 83**	MR8 LED
	WL-25	6W MR16 LED
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	
LED LAMP OPTIONS	**WL-25**	4 Watt, 9 Watt, and Bluetooth RGBW LED
	WL-80 / 81 / 83	Wi-Fi RGBW LED



WL-100




WL-101



WL-102




WL-103

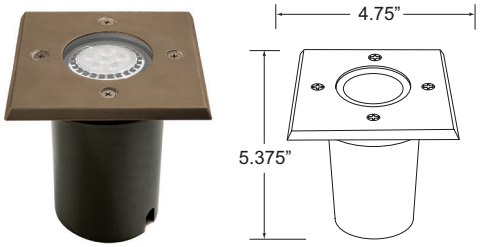


WL-105



WL-104

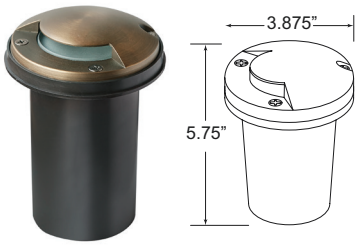

WL-106

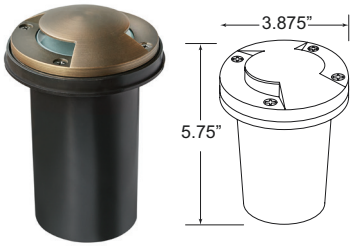


WL-107


APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars, Steps, Walkways
CONSTRUCTION	Solid Cast Brass Cover and Body with Composite Sleeve
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	4, 6, or 9 Watt LED MR16
LED LAMP OPTIONS	Bluetooth RGBW LED Wi-Fi RGBW LED
LENS	Clear Flat Glass
OPTIONAL LENS	Frosted Flat Glass
OPTIONAL COVER	X-100-BRASS RING to be used as a Debris Guard when installed in Mulch or Turf
SPECIAL FEATURES	Brass Body and Cover with Composite Sleeve for Easy Installation in Concrete and Pavers. Each Fixture comes with an X-800 Stake for stable Installation

WELL LIGHTS & INGROUND LIGHTS




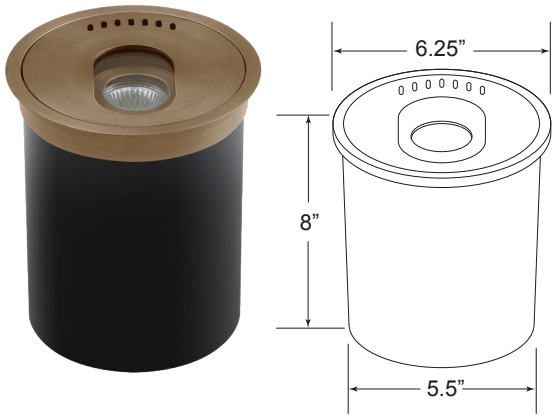

WL-113

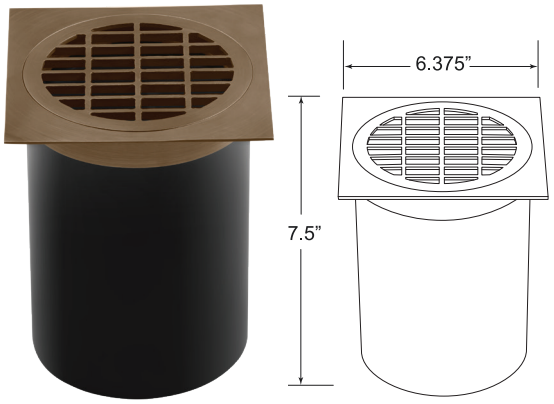


WL-115

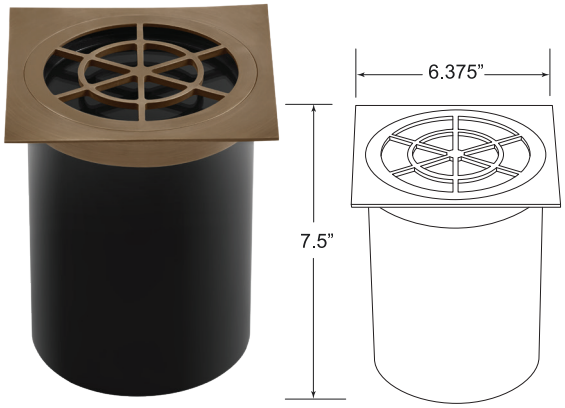


WL-116


APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars	
CONSTRUCTION	Solid Cast Brass Cover with Composite Body	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**WL-115 / WL-116**	6, 10, 13, or 17 Watt LED PAR36
	WL-113	4 Watt or 6 Watt LED MR16
LED LAMP OPTIONS	**WL-115 / WL-116**	Bluetooth RGBW LED
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	
SPECIAL FEATURES	Brass Cover with Composite Body and Adjustable Stainless Steel Gimble Ring for Up/ Down and Angled Adjustments	

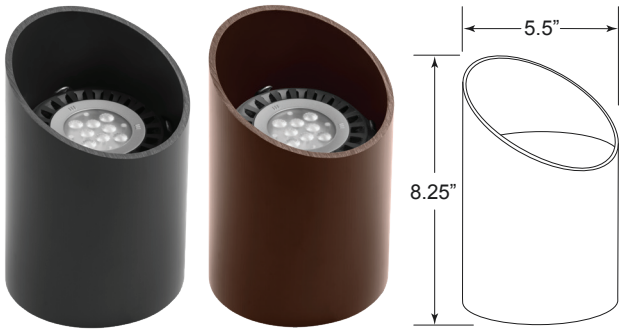


WL-235-BK / WL-235-LB

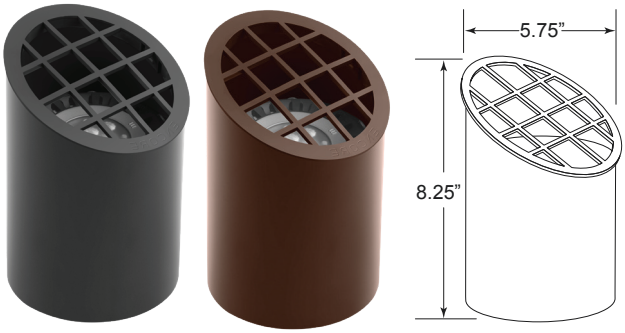

WL-335-BK / WL-335-LB

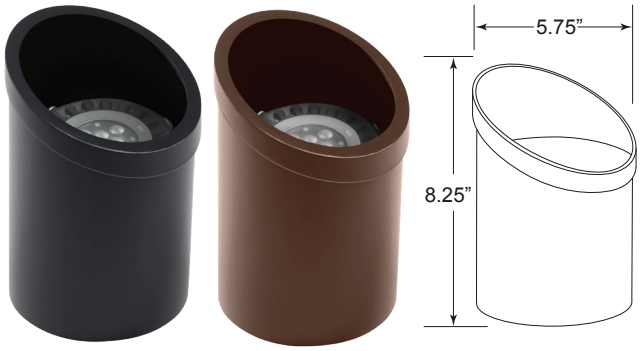


WL-435-BK / WL-435-LB

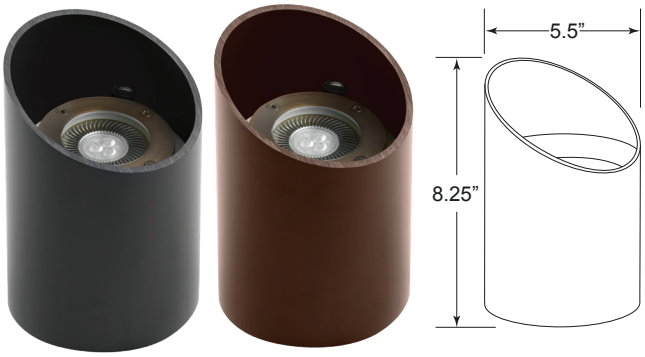


WL-535-BK / WL-535-LB

APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars	
CONSTRUCTION	Composite Body with Stainless Steel Adjustable Gimble Ring	
	WL-435	Solid Cast Brass Cover with Glass Composite Body with Stainless Steel Adjustable Gimble Ring
FINISH	Black or Brown	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**WL-235 / WL-335 / WL-435**	6, 10, 13, or 17 Watt LED PAR36
	WL-535	4, 6, or 9 Watt LED MR16
LED LAMP OPTIONS	Bluetooth RGBW LED	
OPTIONAL LENS	Clear or Frosted Glass Lens	


UNDERWATER LIGHTING

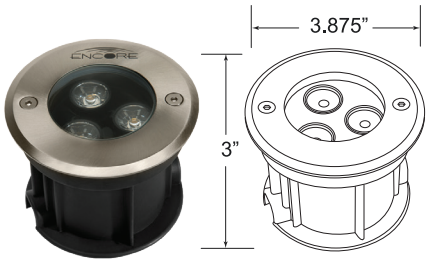

UL-54-3W

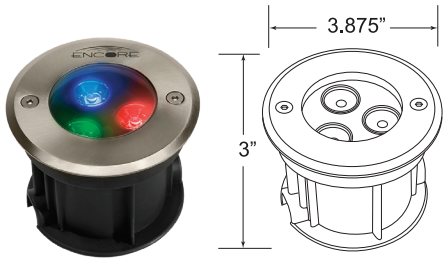


UL-54-3W-RGB

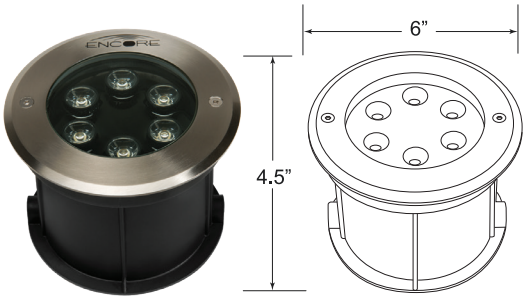

UL-54-6W



UL-54-6W-RGB

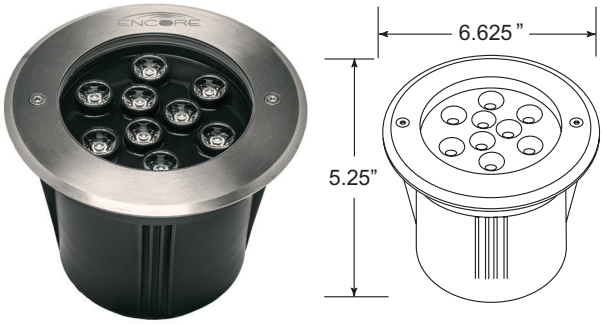


UL-54-9W




UL-54-9W-RGB


APPLICATION	Underwater and Inground Up Lighting
CONSTRUCTION	Stainless Steel Fixture with Composite Body Sleeve
FINISH	Stainless Steel
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	Integrated LED 3 Watt, 6 Watt or 9 Watt Warm White or RGB with DMX Controller for Many Color Options and Color Changing Modes
LENS	Clear Flat Glass

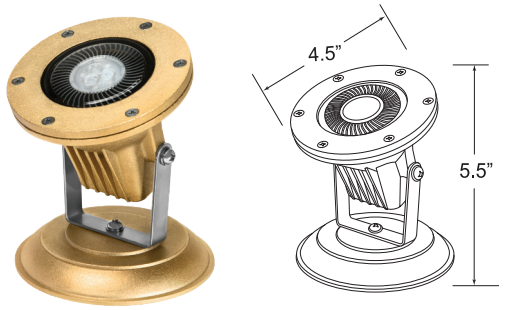


UL-55

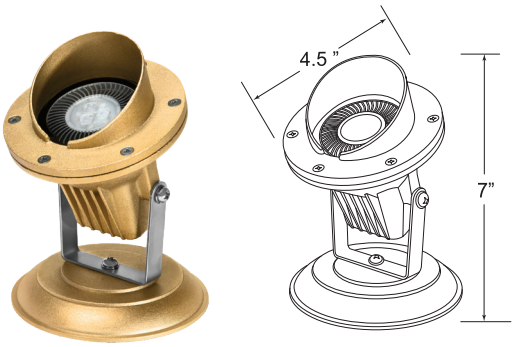


UL-56

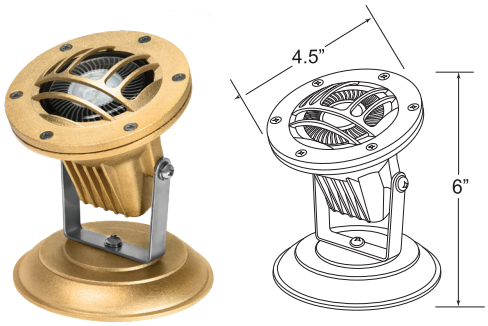

UL-57

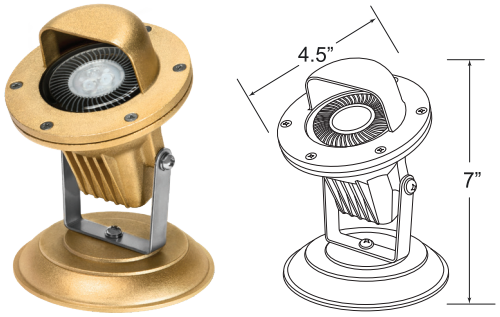


UL-58

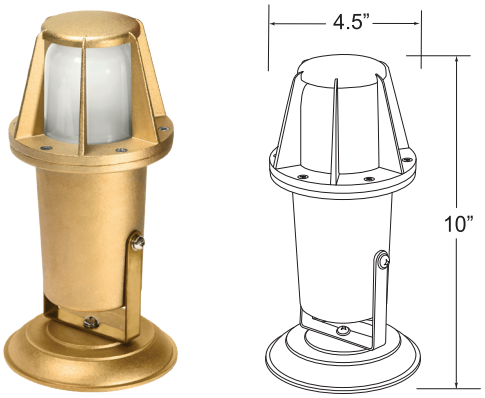


UL-59

APPLICATION	Underwater and Up Lighting
CONSTRUCTION	Solid Cast Brass
FINISH	Natural Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	4 Watt or 6 Watt LED MR16
LENS	Clear Flat Glass

HANGING LIGHTS

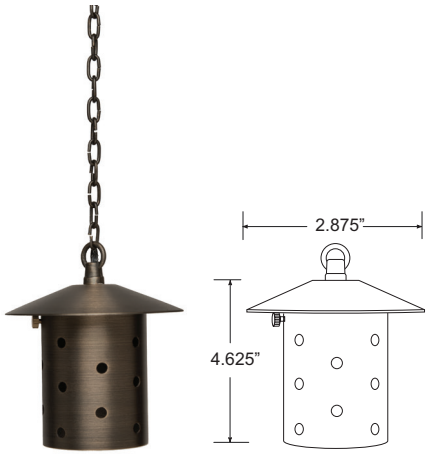


HL-200

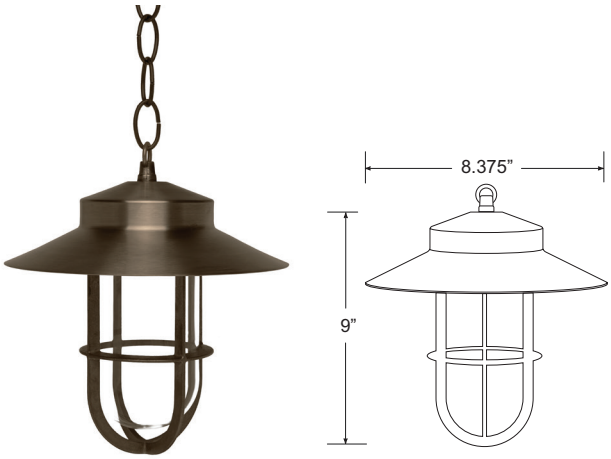

HL-201



HL-202

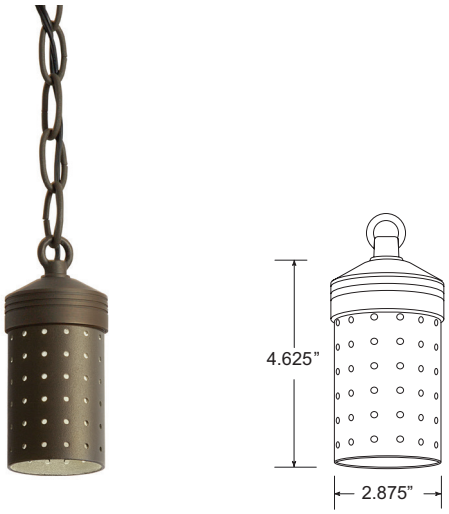

HL-203

APPLICATION	Illuminating Decks, Porches, Outdoor Kitchens, Sun Rooms, Gazebos, Patios	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**HL-200 / HL-202 / HL-203**	3 Watt LED G4 Bi-Pin
	HL-201	Medium Base A19 12 Volt or 120 Volt LED
LED LAMP OPTIONS	**HL-200 / HL-202 / HL-203**	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 4 Watt or 6 Watt MR16 LED Bluetooth RGBW LED Wi-Fi RGBW LED
	HL-201	Bluetooth RGBW LED WiFi RGBW LED



HL-02-SP



HL-02-B-SP



HL-01-B-SP



HL-12-SP




HL-15-SP




HL-02-B



HL-06



HL-12

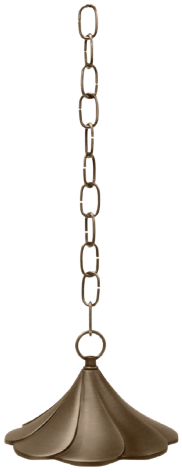


HL-14




HL-60

APPLICATION	Illuminating Decks, Porches, Outdoor Kitchens, Sun Rooms, Gazebos, Patios
CONSTRUCTION	Solid Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	Clear and Frosted Glass Dome


WALL SCONCES



WS-01

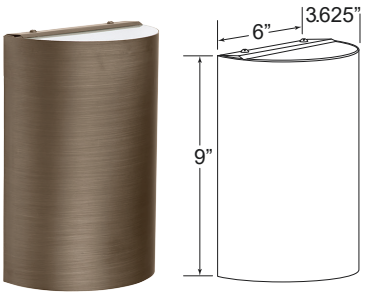


WS-02

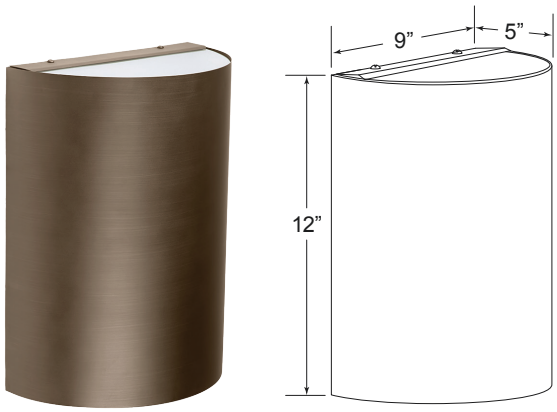


WS-03


APPLICATION	Illuminating Front Entrance Ways, Porches, Decks, Walls, Garages	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**WS-01 / WS-02**	(2) 3 Watt LED Bi-Pin
	WS-03	(2) Medium Base A-19 LED (12v or 120v)
LED LAMP OPTIONS	**WS-01 / WS-02**	Wi-Fi RGBW G4 LED
	WS-03	Bluetooth RGBW LED
		Wi-Fi RGBW LED

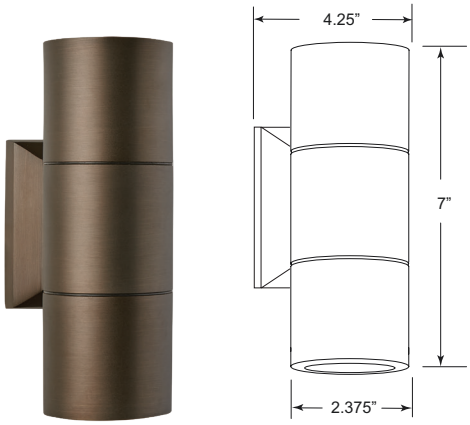


WS-04

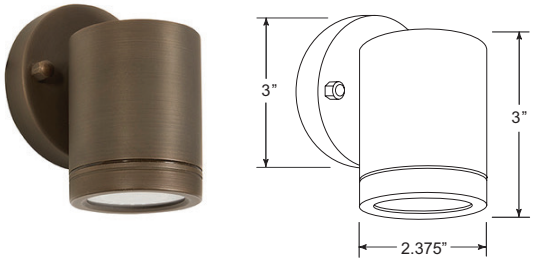

WS-05

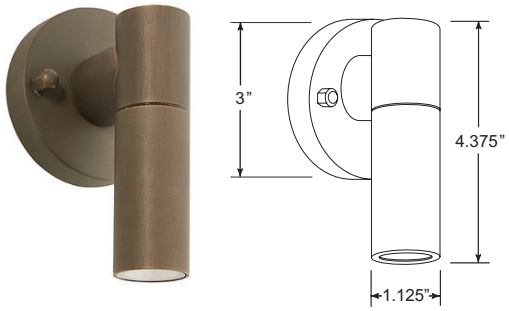

WS-06

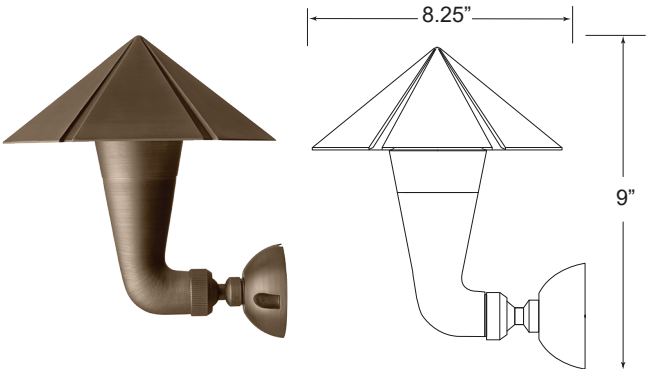


WS-100*

* ANY SHADE CAN BE USED WITH THIS FIXTURE (SHOWN WITH BL-19 SHADE)

APPLICATION	Illuminating Front Entrance Ways, Porches, Decks, Walls, Garages	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	**WS-04**	(2) 4 Watt or 6 Watt LED MR16
	WS-05	4 Watt LED MR16
	WS-06	3 Watt LED Integrated
	WS-100	4 Watt LED MR16
LED LAMP OPTIONS	**WS-04**	Wi-Fi RGBW LED
	WS-05	Wi-Fi RGBW LED
SPECIAL FEATURES	**WS-100**	Available with Most Shades. Please Specify the Shade when Ordering (The Picture Above is Shown with the BL-19 Shade)

ACCESSORIES

RISER EXTENSIONS

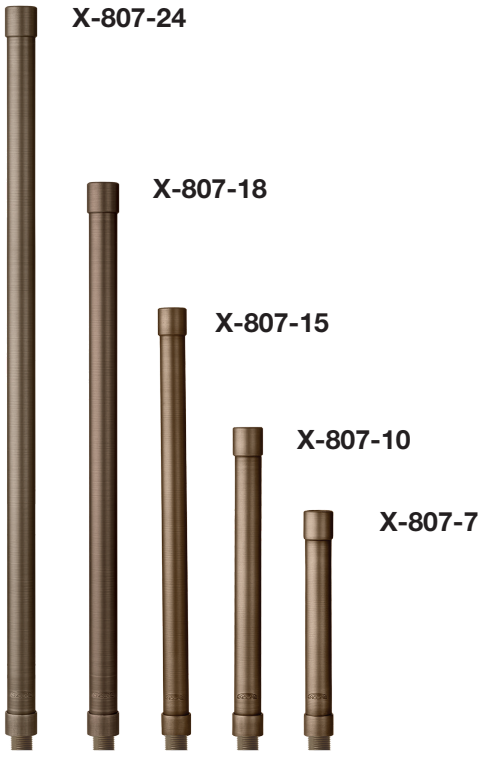

X-807-24


X-807-18

X-807-15

X-807-10

X-807-7

ADJUSTABLE RISER EXTENSIONS

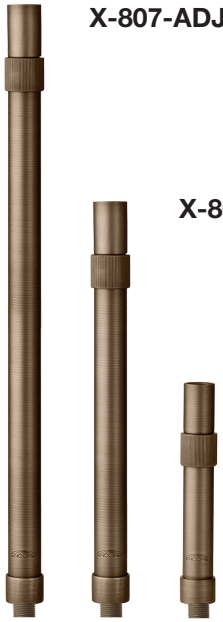


X-807-ADJ-18-36

X-807-ADJ-12-22

X-807-ADJ-6-10

ELBOWED POST

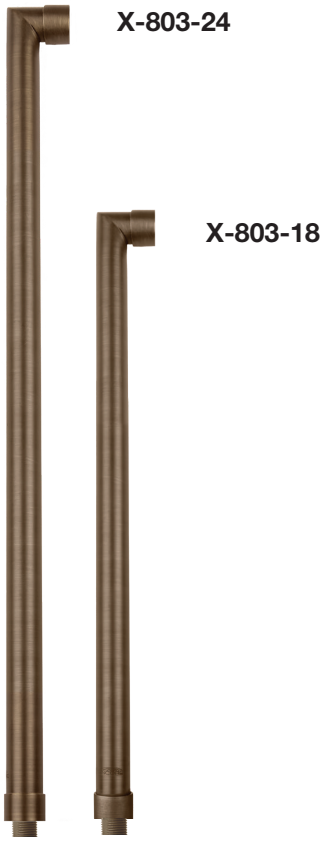


X-803-24

X-803-18

TEE POST



PERFECT POST ASSEMBLY

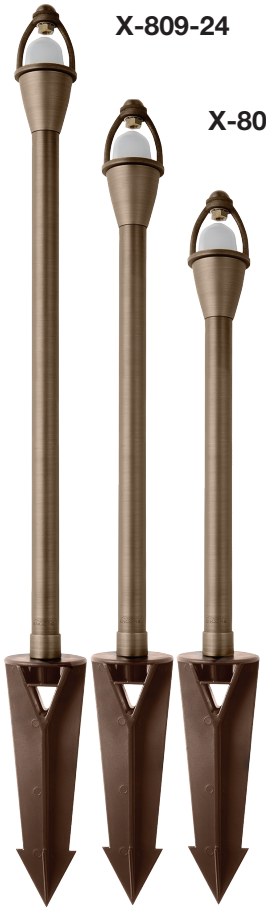

X-809-24

X-809-20

X-809-15

STAKES




X-800



X-801



X-802

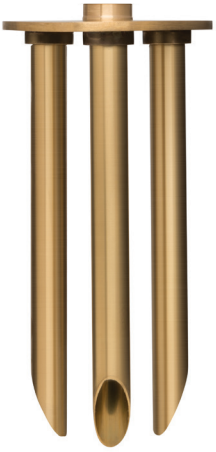

X-805



X-806

WALL MOUNT



X-813-AB

TREE MOUNT



X-815

GUTTER MOUNT



X-818

WIRE NUTS



VOLTAGE BALANCER



X-900

ACCESSORIES



X-811




X-820



X-821



X-825




X-826




X-100-BRASS RING




X-300-BRASS COVER-BK



X-300-BRASS COVER-LB



X-300-GRATE-BK



X-300-GRATE-LB



GIMBLE RING



ARCH



CONE



X-BRASS TEE



X-BRASS ELBOW



X-816



X-BRASS
COUPLER-SMALL



X-BRASS
COUPLER



X-BRASS
COUPLER-XL



X-BRASS NIPPLE



X-BRASS
NIPPLE-LONG



X-BRASS
NIPPLE-EXTENDER



X-SOCKET-G6.35



X-BRASS
SOCKET POST




X-BRASS
KNOB




X-BRASS
FINIAL


PATH & AREA LIGHTING

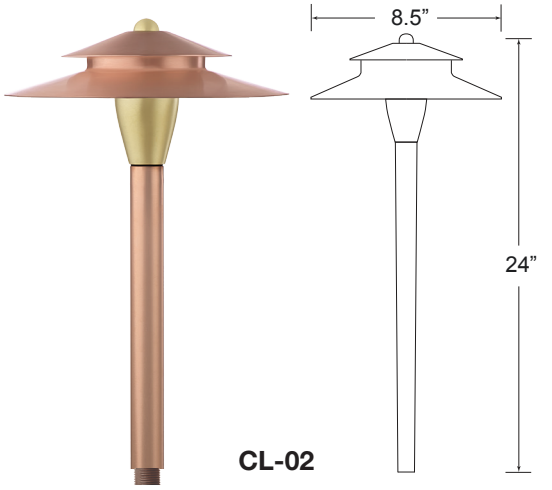


CL-02

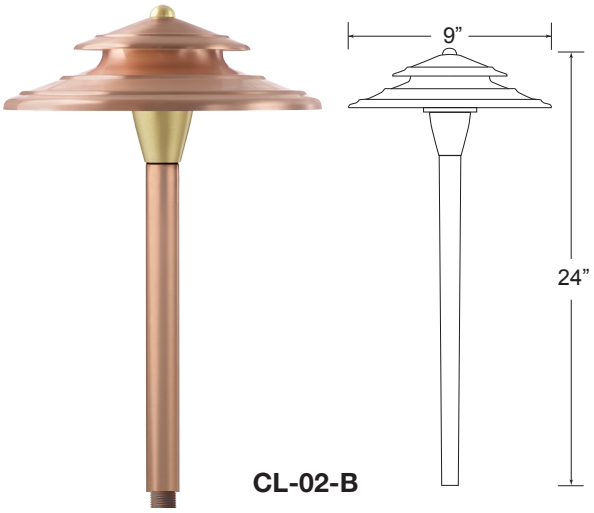

CL-02-B

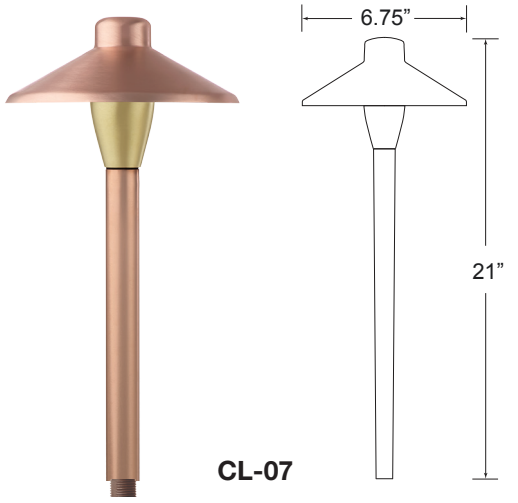

CL-07

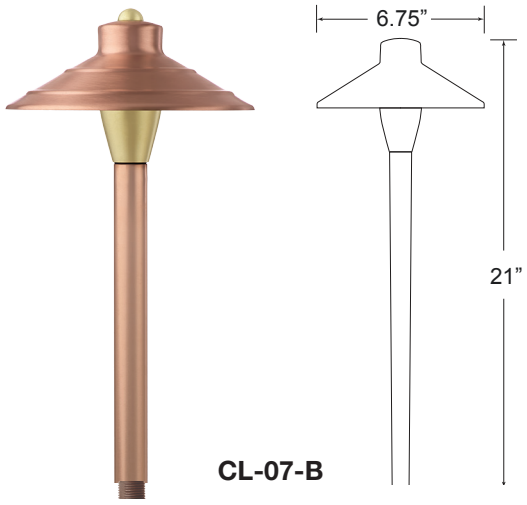


CL-07-B

APPLICATION	Illuminating Pathways, Bed Areas and Driveways	
CONSTRUCTION	Copper Shade with Solid Copper Post	
FINISH	Copper	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Ground Stake	
LED LAMP	3 Watt LED G4 Bi-Pin	
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED	
LENS	Clear and Frosted Glass Dome	
HEIGHT	**CL-02 / CL-02-B** 24”	**Light Spread:** 10-12’
	CL-07 / CL-07-B 21”	**Light Spread:** 8-10’





CL-05

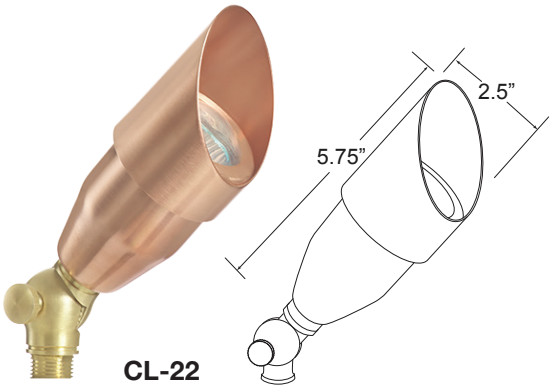


CL-22

APPLICATION	**CL-05**		Illuminating Pathways, Bed Areas and Driveways
	CL-22		Up Lighting of Trees, Walls, Homes
CONSTRUCTION	Heavy Copper and Brass		
FINISH	Copper		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	**CL-05**		3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	**CL-05**		1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED
LENS	**CL-05**		Clear and Frosted Glass Dome
	CL-22		Clear Convex Lens
HEIGHT	**CL-05**	21”	**Light Spread:** 8-10’

PATH & AREA LIGHTING




AL-02

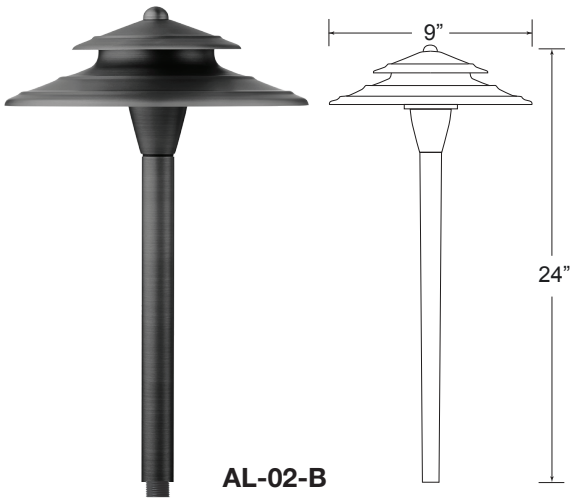

AL-02-B



AL-05

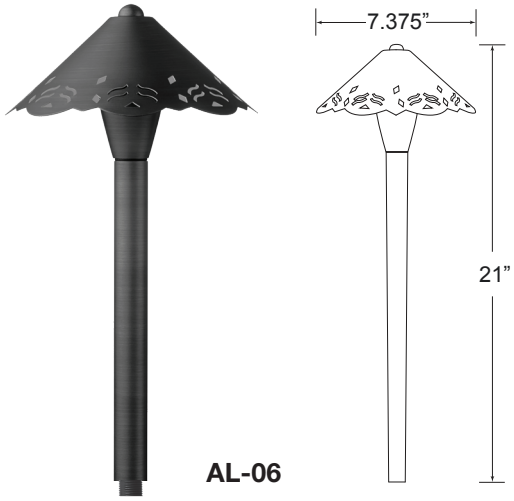

AL-06

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Die Cast Aluminum Shade and Post		
FINISH	Textured Back		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**AL-02 / AL-02-B**	24”	**Light Spread:** 10-12’
	AL-05	21”	**Light Spread:** 8-10’
	AL-06	21”	**Light Spread:** 8-10’



AL-07



AL-07-B



AL-09-A




AL-09-F




AL-09-H

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Die Cast Aluminum Shade and Post		
	AL-09	Glass Shade	
FINISH	Textured Back		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**AL-07 / AL-07-B**	21”	**Light Spread:** 8-10’
	AL-09	24”	**Light Spread:** 10-12’

PATH & AREA LIGHTING

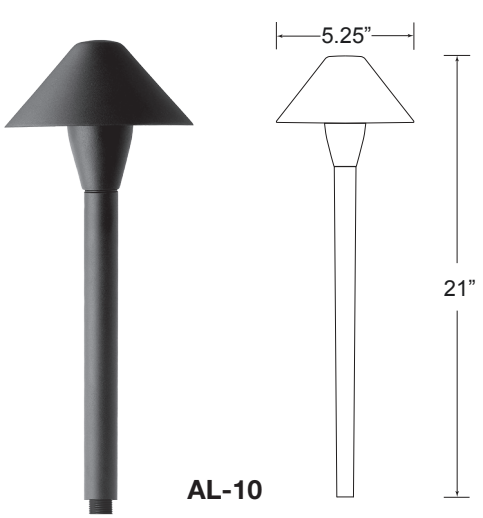

AL-10

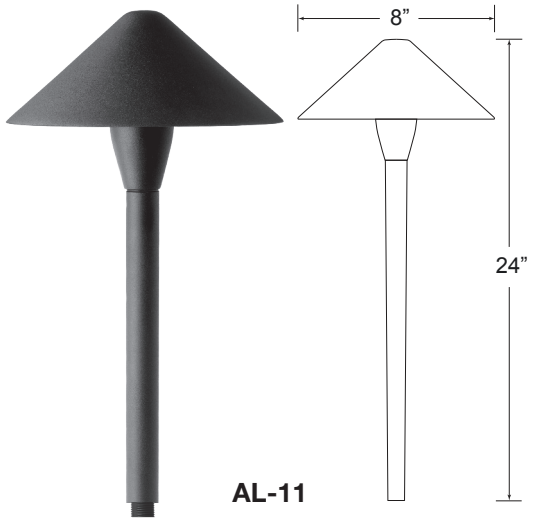

AL-11




AL-13





AL-14

APPLICATION	Illuminating Pathways, Bed Areas and Driveways		
CONSTRUCTION	Die Cast Aluminum Shade and Post		
FINISH	Textured Back		
WIRE LEAD	25 Feet of 18-2 Wire		
STAKE	X-801 Heavy Duty Ground Stake		
LED LAMP	3 Watt LED G4 Bi-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Wi-Fi RGBW LED		
LENS	Clear and Frosted Glass Dome		
HEIGHT	**AL-10 / AL-13** 21”	**Light Spread:** 6-8’	
	AL-11 / AL-14 24”	**Light Spread:** 8-10’	

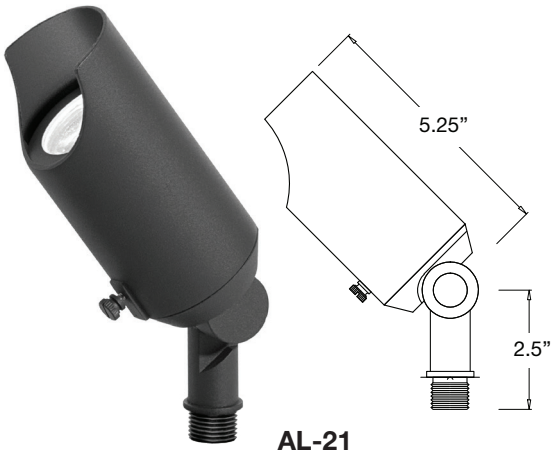


AL-21

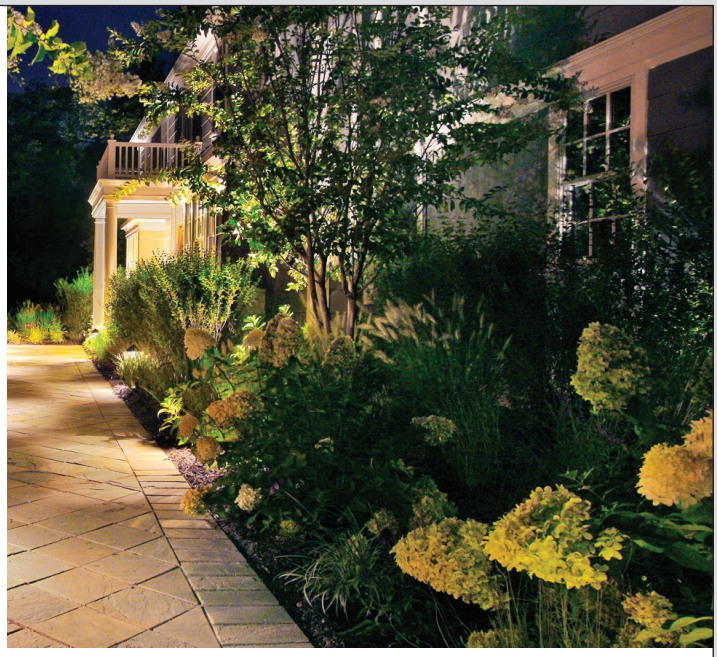

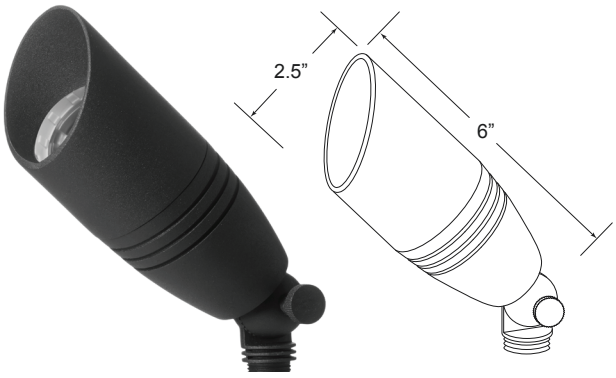

AL-26

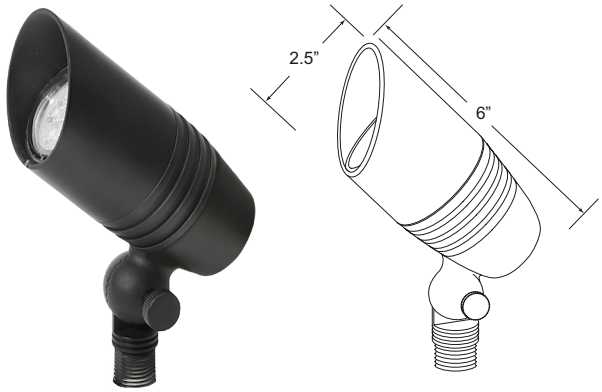


AL-28

APPLICATION	Up or Down Lighting of Trees, Homes and Structures	
CONSTRUCTION	Die Cast Aluminum	
FINISH	Textured Black	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-800 Heavy Duty Ground Stake	
LED LAMP	**AL-21**	4 Watt or 6 Watt LED MR16
	AL-26 / AL-28	4 Watt, 6 Watt, or 9 Watt LED MR16
LED LAMP OPTIONS	**AL-26 / AL-28**	Bluetooth RGBW LED
LENS	Clear Glass	
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue	


UP & DOWN WALL WASHER / FLOOD LIGHTING





AL-30



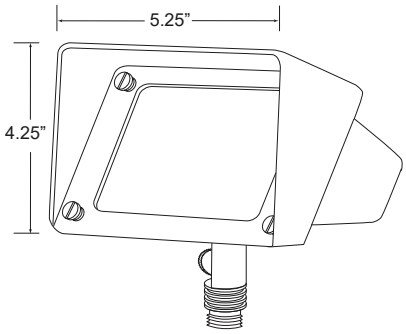


AL-31

APPLICATION	Up or Down Lighting of Walls, Signs, Buildings, Homes, Water Features and Structures	
CONSTRUCTION	Die Cast Aluminum	
FINISH	Textured Black	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	**AL-30**	X-800 Heavy Duty Ground Stake
	AL-31	X-801 Heavy Duty Ground Stake
LED LAMP	**AL-30**	3 Watt LED Panel
	AL-31	6 Watt LED Panel
LED LAMP OPTIONS	**AL-31**	4 Watt or 6 Watt LED MR16
	AL-30	3 Watt or 4 Watt G4 LED
	AL-31	20 Watt Super Bright LED Panel
	AL-31	Wi-Fi RGBW LED
LENS	Clear, Frosted and Linear Glass	


Optional Finishes



Black Texture



Brown Metallic

White Gloss


Bronze Taupe



Dark Copper Satin


Rust



Light Gray


Dark Gray



Dark Bronze Sparkle


Dark Rust



Stainless


Desert Stone


Bronze Blast


Copper Metallic


Chrome


Antique Green


Decorative Bronze


Bronze Metallic


Nickel


Weathered Green

- Custom color matching is available
- Additional RAL colors are available using the standard RAL color system
- Actual finishes may differ slightly than as shown above
- Choosing any color other than the standard finish will result in an up-charge per fixture

TRANSFORMERS



TR-75SS-15



TR-150SS-15



TR-300SS-15



TR-300SS-22



TR-600SS-15



TR-600SS-22

Multi-Tap Transformers (WiFi Compatible)

Construction: 304 Stainless Steel
Taps: 12-15 Volt Transformers are 12, 13, 14, & 15
Taps: 12-22 Volt Transformers are 12, 13, 14, 15, 16, 17, 18, 20, & 22
Primary Protection: Automatic thermal reset breaker
Secondary Protection: 25 amp, 300 watt magnetic breaker with reset switch
Torodial Core: Epoxy sealed core which is silent and up to 10% more efficient, runs much cooler than laminated cores
Terminal: Extra large 125 amp terminal blocks, holds (8) 12/2 wire
Internal Wiring: Non-corrosive, tin coated marine grade, dedicated current loop to measure primary amperage.
Timer Receptacle: Standard receptacle for plug and play options
Photo Cell Plug: Dedicated plug for easy installation of photo cell
Child Proof Safety: Lockable latched door to prevent access

Model	Volts	Wattage	Max Amps	Dimensions	Weight
TR-75SS-15	12, 15	75 watts	.625 amps	6 ½" L x 3 ¾" W x 4 ¼" D	8 lbs
TR-150SS-15	12, 13, 14, 15	150 watts	1.25 amps	10 ½" L x 5 ¾" W x 4 ½" D	13 lbs
TR-300SS-15	12, 13, 14, 15	300 watts	2.5 amps	16 ¼" L x 6" W x 5 ½" D	24 lbs
TR-600SS-15	12, 13, 14, 15	600 watts	5.0 amps	16 ¼" L x 6" W x 5 ½" D	30 lbs
TR-300SS-22	12, 13, 14, 15, 16, 17, 18, 22	300 watts	2.5 amps	16 ¼" L x 6" W x 5 ½" D	26 lbs
TR-600SS-22	12, 13, 14, 15, 16, 17, 18, 22	600 watts	5.0 amps	16 ¼" L x 6" W x 5 ½" D	32 lbs
TR-900SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	900 watts	7.5 amps	17 ¼" L x 7 ¾" W x 7" D	48 lbs
TR-1200SS-22	12, 13, 14, 15, 16, 17, 18, 20, 22	1200 watts	10 amps	17 ¼" L x 7 ¾" W x 7" D	51 lbs



X-TM



X-PC-25



X-TM-DM



X-PC



X-TM-ASTRO





X-WIFI SMART PLUG



X-DIMMER

LAMP GUIDE

Lamp Type	*Part Number*	*Watts*	*Volts*	*Beam Spread*	*Base*	*Lumens/ CBCP*	*Color Temp*	*Rated Life (Hours)*
LED MR8 	LA-LED-MR8-3W-2700	3	12	80°	G4 Bi-Pin	120	2700	40,000
	LA-LED-MR8-3W-3000	3	12	80°	G4 Bi-Pin	120	3000	40,000
LED MR11 	LA-LED-MR11-3W-2700	3	12	40°	G4 Bi-Pin	180	2700	40,000
	LA-LED-MR11-3W-3000	3	12	40°	G4 Bi-Pin	180	3000	40,000
LED MR16 	LA-LED-MR16-4W-2700-15	4	12	15°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-30	4	12	30°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-45	4	12	45°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-60	4	12	60°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-2700-100	4	12	100°	GU5.3 Bi-Pin	240	2700	40,000
	LA-LED-MR16-4W-3000-15	4	12	15°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-30	4	12	30°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-45	4	12	45°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-60	4	12	60°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-3000-100	4	12	100°	GU5.3 Bi-Pin	260	3000	40,000
	LA-LED-MR16-4W-5000-45	4	12	45°	GU5.3 Bi-Pin	320	5000	40,000
	LA-LED-MR16-4W-5000-60	4	12	60°	GU5.3 Bi-Pin	320	5000	40,000
	LA-LED-MR16-5W-2700-100	5	12	100°	GU5.3 Bi-Pin	340	2700	40,000
	LA-LED-MR16-5W-3000-100	5	12	100°	GU5.3 Bi-Pin	360	3000	40,000
	LA-LED-MR16-6W-2700-15	6	12	15°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-2700-30	6	12	30°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-2700-45	6	12	45°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-2700-60	6	12	60°	GU5.3 Bi-Pin	450	2700	40,000
	LA-LED-MR16-6W-3000-15	6	12	15°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-30	6	12	30°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-45	6	12	45°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-3000-60	6	12	60°	GU5.3 Bi-Pin	470	3000	40,000
	LA-LED-MR16-6W-5000-45	6	12	45°	GU5.3 Bi-Pin	510	5000	40,000
	LA-LED-MR16-6W-5000-60	6	12	60°	GU5.3 Bi-Pin	510	5000	40,000
	LA-LED-MR16-9W-2700-30	9	12	30°	GU5.3 Bi-Pin	560	2700	40,000
	LA-LED-MR16-9W-2700-45	9	12	45°	GU5.3 Bi-Pin	560	2700	40,000
	LA-LED-MR16-9W-2700-60	9	12	60°	GU5.3 Bi-Pin	560	2700	40,000
	LA-LED-MR16-9W-3000-30	9	12	30°	GU5.3 Bi-Pin	580	3000	40,000
	LA-LED-MR16-9W-3000-45	9	12	45°	GU5.3 Bi-Pin	580	3000	40,000
	LA-LED-MR16-9W-3000-60	9	12	60°	GU5.3 Bi-Pin	580	3000	40,000
Bluetooth	LA-LED-MR16-10W-RGBW-45	10	12	45°	GU5.3 Bi-Pin	Varies	RGBW	40,000



MR-8-3W



MR-11-3W



MR-16-4W



MR-16-6W




MR-16-9W



PAR-36



MR-16-RGBW-BT

Lamp Type	*Part Number*	*Watts*	*Volts*	*Beam Spread*	*Base*	*Lumens/ CBCP*	*Color Temp*	*Rated Life (Hours)*
LED PAR 36 	LA-LED-PAR36-6W-2700-40	6	12	40°	Screw Terminal	460	2700	40,000
	LA-LED-PAR36-6W-3000-40	6	12	40°	Screw Terminal	480	3000	40,000
	LA-LED-PAR36-6W-2700-60	6	12	60°	Screw Terminal	460	2700	40,000
	LA-LED-PAR36-6W-3000-60	6	12	60°	Screw Terminal	480	3000	40,000
	LA-LED-PAR36-10W-2700-40	10	12	40°	Screw Terminal	600	2700	40,000
	LA-LED-PAR36-10W-3000-40	10	12	40°	Screw Terminal	620	3000	40,000
	LA-LED-PAR36-10W-2700-60	10	12	60°	Screw Terminal	600	2700	40,000
	LA-LED-PAR36-10W-3000-60	10	12	60°	Screw Terminal	620	3000	40,000
	LA-LED-PAR36-13W-2700-40	13	12	40°	Screw Terminal	800	2700	40,000
	LA-LED-PAR36-13W-3000-40	13	12	40°	Screw Terminal	820	3000	40,000
	LA-LED-PAR36-13W-2700-60	13	12	60°	Screw Terminal	800	2700	40,000
	LA-LED-PAR36-13W-3000-60	13	12	60°	Screw Terminal	820	3000	40,000
	LA-LED-PAR36-17W-2700-40	17	12	40°	Screw Terminal	930	2700	40,000
	LA-LED-PAR36-17W-3000-40	17	12	40°	Screw Terminal	960	3000	40,000
	LA-LED-PAR36-17W-2700-60	17	12	60°	Screw Terminal	930	2700	40,000
	LA-LED-PAR36-17W-3000-60	17	12	60°	Screw Terminal	960	3000	40,000
Bluetooth	LA-LED-PAR36-10W-RGBW-40	10	12	40°	Screw Terminal	Varies	RGBW	40,000

LAMP GUIDE




T3-1W



T3-3W




T3-4W



G4 COB



T4-2W





T4-3W



BA-15-D



BA-15-S

Lamp Type	*Part Number*	*Watts*	*Volts*	*Beam Spread*	*Base*	*Lumens/ CBCP*	*Color Temp*	*Rated Life (Hours)*
LED T3	LA-LED-T3-25-1W-3000	1	12	–	G4 Bi-Pin	90	3000	40,000
	LA-LED-T3-13-2W-3000	2	12	–	G4 Bi-Pin	180	3000	40,000
	LA-LED-T3-18-3W-3000	3	12	–	G4 Bi-Pin	240	3000	40,000
	LA-LED-T3-27-4W-3000	4	12	–	G4 Bi-Pin	360	3000	40,000
	LA-LED-T4-48-2W-3000	2	12	–	G4 Bi-Pin	190	3000	40,000
	LA-LED-T4-72-3W-3000	3	12	–	G4 Bi-Pin	250	3000	40,000
	LA-LED-COB-3W-2700	3	12	–	G4 Bi-Pin	240	2700	40,000
	LA-LED-COB-3W-3000	3	12	–	G4 Bi-Pin	260	3000	40,000
LED BA-15	LA-LED-BA-15S-3W-3000	3	12	–	Single Bayonet	240	3000	40,000
	LA-LED-BA-15D-3W-3000	3	12	–	Double Bayonet	240	3000	40,000



A19



A19 CLEAR



CANDELABRA



LED-BL-30



LED-BL-31




LED-BL-31-20W



LED-SD-500



LED-SD-501



LED-SD-505



LED-SD-506

Lamp Type	*Part Number*	*Watts*	*Volts*	*Beam Spread*	*Base*	*Lumens/ CBCP*	*Color Temp*	*Rated Life (Hours)*
	LA-LED-CA-2W-2700-12V	2	12	–	Candelabra	210	2700	40,000
	LA-LED-A19-4W-2700-12V	4	12	–	Medium Base	300	2700	40,000
LED A-19	LA-LED-A19-6.5W-2700-12V	6.5	12	–	Medium Base	360	2700	40,000
	LA-LED-A19-6.5W-3000-12V	6.5	12	–	Medium Base	380	3000	40,000
	LA-LED-A19-6.5W-2700-12V	6.5	120	–	Medium Base	380	2700	40,000
	LA-LED-A19-6.5W-3000-12V	6.5	120	–	Medium Base	380	3000	40,000
LED BL-30	LA-LED-BL-30-3W-3000	3	12	–	G4 Bi-Pin	260	3000	40,000
LED BL-31	LA-LED-BL-31-6W-3000	6	12	–	G4 Bi-Pin	470	3000	40,000
LED SD-500	LA-LED-SD-500-3W-3000	3	12	–	Crimp	220	3000	40,000
LED SD-501	LA-LED-SD-501-2W-3000	2	12	–	Crimp	160	3000	40,000
LED SD-505	LA-LED-SD-505-3W-3000	3	12	–	Crimp	240	3000	40,000
LED SD-506	LA-LED-SD-506-1W-2700	1	12	–	Crimp	160	2700	40,000
LED SD-506	LA-LED-SD-506-1W-3000	1	12	–	Crimp	180	3000	40,000
LED SD-506	LA-LED-SD-506-2W-2700	2	12	–	Crimp	220	2700	40,000
LED SD-506	LA-LED-SD-506-2W-3000	2	12	–	Crimp	240	3000	40,000

LAMP GUIDE



LED-G4-BRASS



LED-G4-WIFI-RGBW



LED-SD-400



LED-SD-403



LED-SD-60




LED-MODULE-PATHLIGHT



X-REPEATER-BT

Lamp Type	*Part Number*	*Watts*	*Volts*	*Beam Spread*	*Base*	*Lumens/ CBCP*	*Color Temp*	*Rated Life (Hours)*
LED G4	LA-LED-G4-BRASS	4	12	–	Bi-Pin	360	3000	40,000
LED BL-31	LA-LED-G4-WIFI-RGBW	3	12	–	Bi-Pin	Varies	RGBW	40,000
LED SD-400	LA-LED-SD-400-2W-3000	2	12	–	Crimp	180	3000	40,000
LED SD-403	LA-LED-SD-403-3W-3000	3	12	–	Crimp	220	3000	40,000
LED SD-60	LA-LED-SD-60-3W-3000	3	12	–	Crimp	240	3000	40,000
MODULE	LA-LED-PATHLIGHT-MODULE	4	12	–	Crimp	220	3000	40,000
REPEATER	X-REPEATER-BT	Bluetooth Signal Booster						


2200K Candle Light
2700K Warm White
3000K Warm White
5000K Cool White

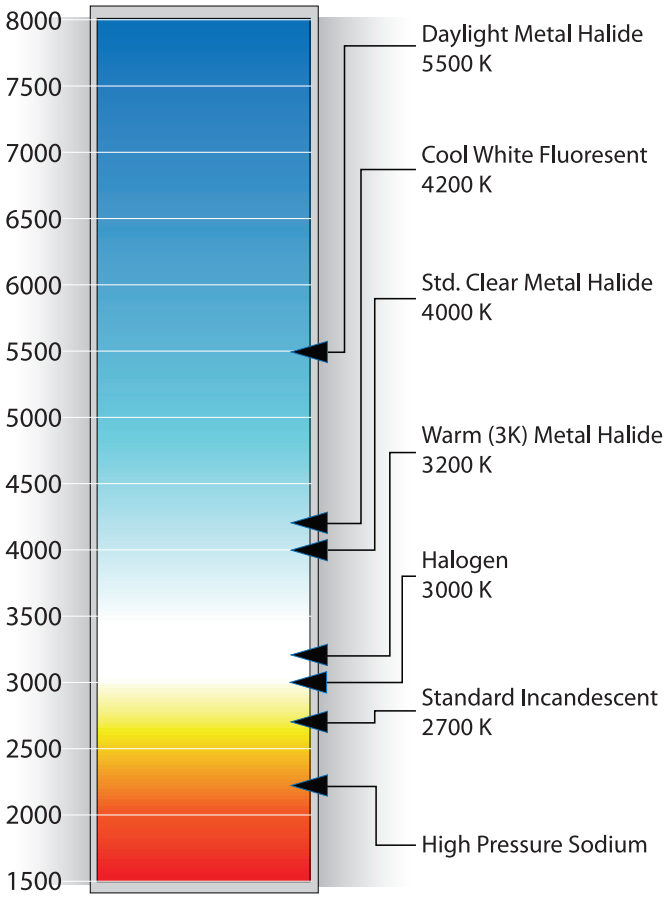
8000
7500
7000
6500
6000
5500
5000
4500
4000
3500
3000
2500
2000
1500
Daylight Metal Halide
5500 K
Cool White Fluoresent
4200 K
Std. Clear Metal Halide
4000 K
Warm (3K) Metal Halide
3200 K
Halogen
3000 K
Standard Incandescent
2700 K
High Pressure Sodium

Encore Landscape Lighting warrants to the owner, each new lighting product against defects in material and workmanship for a period described below. During the warranty period, Encore Landscape Lighting will repair or replace, at our discretion, any part found to be defective. Your remedy is limited solely to the replacement or repair of defective parts.

This warranty does not apply to products, including lamps, not manufactured by Encore Landscape Lighting when used in conjunction with Encore Landscape Lighting products; or where equipment is used, or installation is performed in any manner contrary to Encore Landscape Lighting's specifications or instructions, nor where equipment is altered or modified. Encore Landscape Lighting assumes no responsibility for the improper installation of its products.

Encore Landscape Lighting is not liable for indirect, incidental or consequential damages in connection with the use of equipment, including but not limited to: vegetation loss, the cost of substitute equipment or services required during malfunction, property damage or personal injury resulting from installers actions, whether negligent or otherwise.

All implied warranties, including those of merchantability and fitness of use, are limited to the duration of this express warranty. All transformers, ABS well lights, brass and copper fixtures are covered by this warranty for the life of the original installation. All aluminum Encore Landscape Lighting fixtures are covered by this warranty for a period of three years from the date of installation. The warranty does not extend to color fading by UV rays or exposure to harsh chemicals or harsh environments including salt water environments. This warranty is non-transferable. Underwater fixtures have a warranty of one year. This warranty does not include the replacement of any lamps with the expectation of the LED lamps as listed below.

LED lamps have a warranty of three years from the date of purchase. The LED lamps must be installed at the correct voltage. Any LED lamp that is installed at an excessive voltage will void the warranty. The LED Lamps must be installed in conjunction with an Encore Landscape Lighting transformer or an approved transformer by Encore Landscape Lighting. The transformer must be a magnetic type. The use of Encore Landscape Lighting's LED lamps without a magnetic type of transformer or at voltages higher than the preferred specs will void the warranty.

In order to have a valid warranty, a registration form must be completed and submitted back to Encore Landscape Lighting within 30 days of purchase. The warranty registration form can be found on our website at www.encorelandscapelighting.com. The warranty form must be fully completed.

A product is covered during the warranty period if it is returned to Encore Landscape Lighting, freight prepaid. Our factory will inspect the product to determine if it is defective under the terms of the warranty. All products must have an RGA form (return goods authorization) completed by the customer and sent to Encore Landscape Lighting for approval. Once approved, a RGA number will be issued. No returns will be accepted without the RGA number. Encore Landscape Lighting does not compensate for any labor, diagnosis, repair, replacement, shipping fees or transportation.